


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

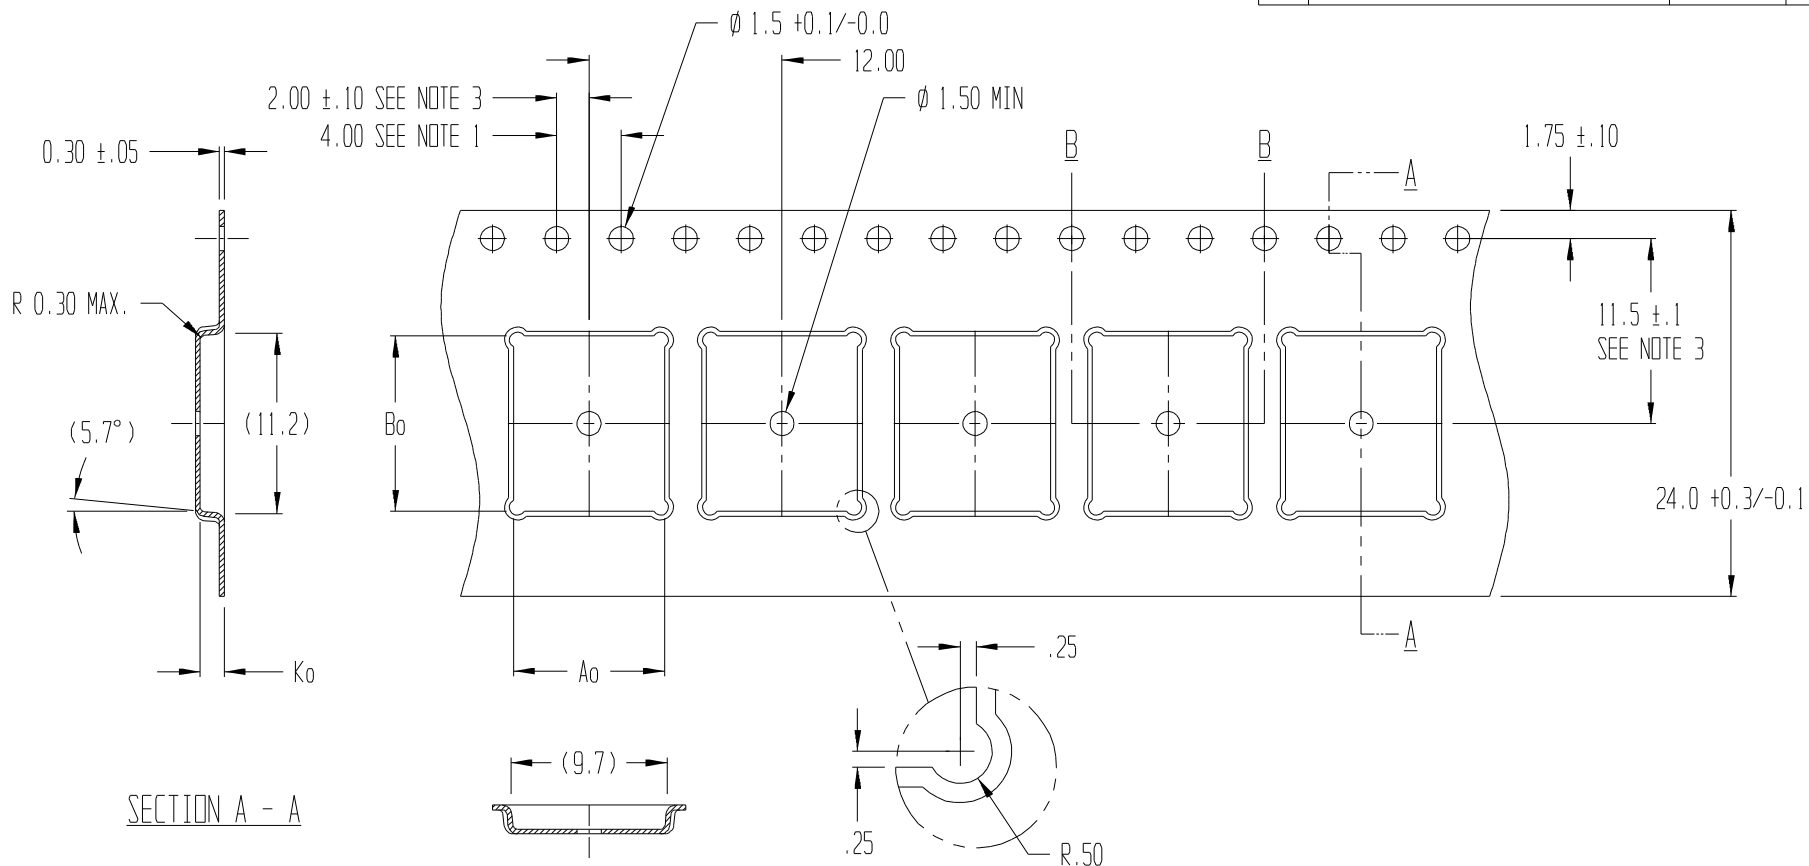

SECTION A - A

SECTION B - B

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE  $\pm 0.2$
2. CAMBER IN COMPLIANCE WITH EIA 481
3. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE
4.  $A_0$  AND  $B_0$  ARE CALCULATED ON A PLANE AT A DISTANCE "R" ABOVE THE BOTTOM OF THE POCKET.

$A_0 = 9.40$   
 $B_0 = 10.90$   
 $K_0 = 1.50$



**ADVANTEK**<sup>®</sup>  
engineered confidence™

TITLE ADVANTEK PART DRAWING NUMBER 9X10.5-A CARRIER TAPE			
TOLERANCES - UNLESS NOTED 1PL $\pm 0.2$ 2PL $\pm 0.10$	MATERIAL PS+C	DWG SIZE B	
ALL DIMS IN MILLIMETERS PER ASME Y14.5M			
DRAWN BY BTH	DATE 11/17/2010	SCALE 3:1	SHEET 1 OF 1
CK'D BY TMD	PROJECT NO. 7415.00	DWG NO. T108632BT	REV