


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
2.	WAS COLSED TOOL	03/25/11	JH

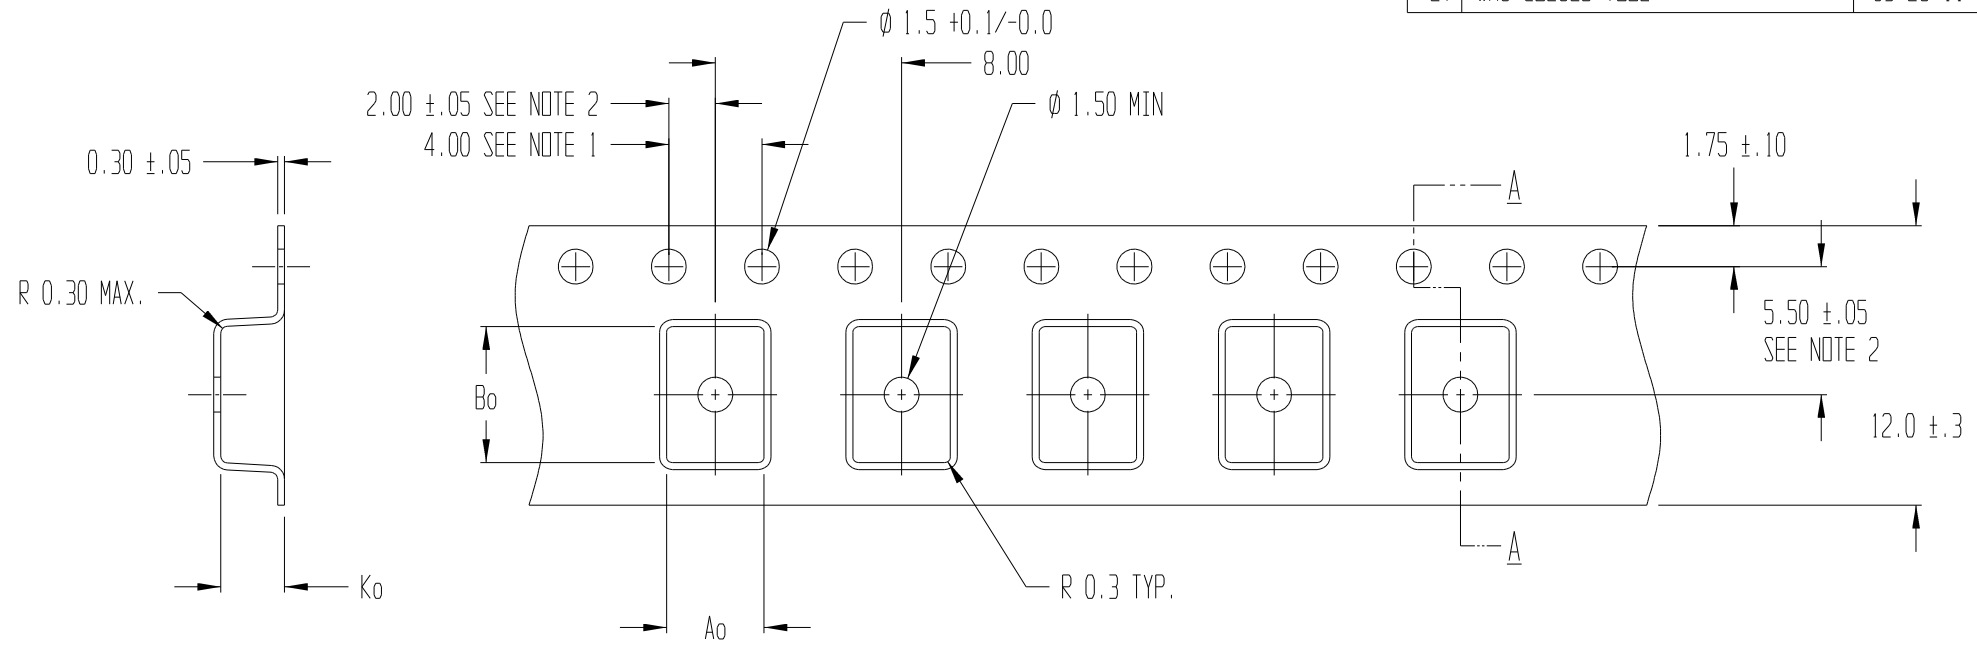

SECTION A - A

$A_0 = 4.19$
 $B_0 = 5.84$
 $K_0 = 2.74$

- NOTES:
1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.2
 2. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE
 3. A_0 AND B_0 ARE CALCULATED ON A PLANE AT A DISTANCE "R" ABOVE THE BOTTOM OF THE POCKET.



TITLE ADVANTEK PART DRAWING NUMBER BCO033-A CARRIER TAPE			
TOLERANCES - UNLESS NOTED 1PL $\pm .2$ 2PL $\pm .10$	MATERIAL PS+C	DWG SIZE B	
ALL DIMS IN MILLIMETERS PER ASME Y14.5M			
DRAWN BY RVR	DATE 04/07/2004	SCALE 4:1	SHEET 1 OF 1
CK'D BY	PROJECT NO. T-12855 / 7666.00	DWG NO. T104681BT	REV 2