


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
1	WAS CLOSE TOOL	1/28/2011	XHL

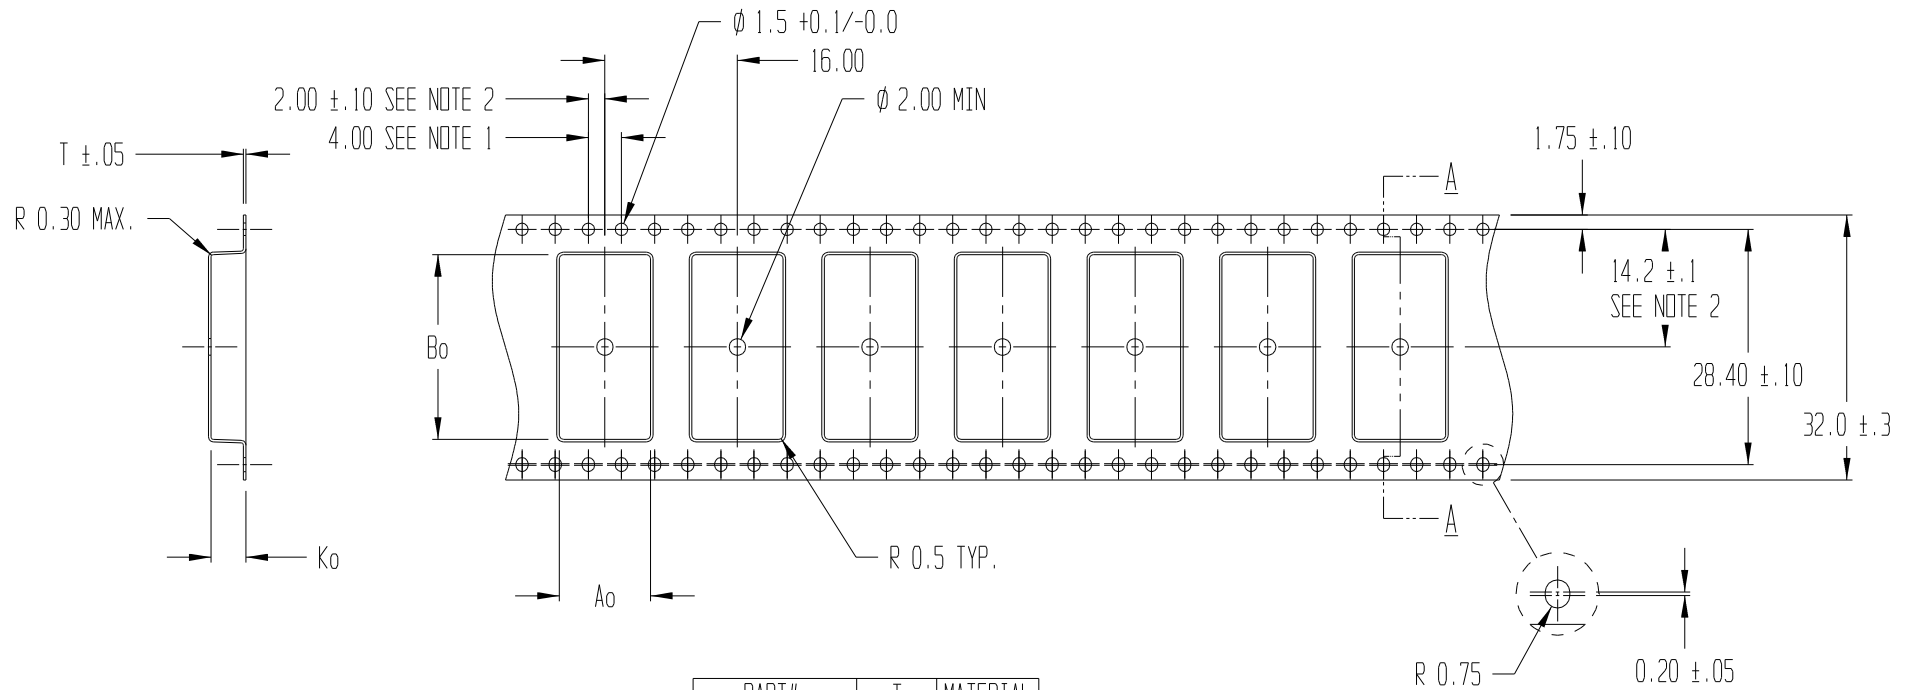

SECTION A - A

PART#	T	MATERIAL
4022X1-AC	0.30	PS+C
4022X1-AG	0.25	PC

Ao = 11.00
Bo = 22.30
Ko = 4.22

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.2
2. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE
3. Ao AND Bo ARE CALCULATED ON A PLANE AT A DISTANCE "R" ABOVE THE BOTTOM OF THE POCKET.



TITLE ADVANTEK PART DRAWING NUMBER 4022X1-AG CARRIER TAPE			
TOLERANCES - UNLESS NOTED 1PL ± 0.2 2PL ± 0.10	MATERIAL SEE TABLE	DWG SIZE B	
ALL DIMS IN MILLIMETERS PER ASME Y14.5M			
DRAWN BY CKS/bth	DATE 06/18/2009	SCALE 3:2	SHEET 1 OF 1
CK'D BY	PROJECT NO. 7666.00	DWG NO. T107686BT	REV 1