


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED



$A_o = 5.0$
 $B_o = 8.4$
 $K_o = 2.0$

- NOTES:
- 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.2
 - CAMBER IN COMPLIANCE WITH EIA 481
 - POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE
 - A_o AND B_o ARE CALCULATED ON A PLANE AT A DISTANCE "R" ABOVE THE BOTTOM OF THE POCKET.

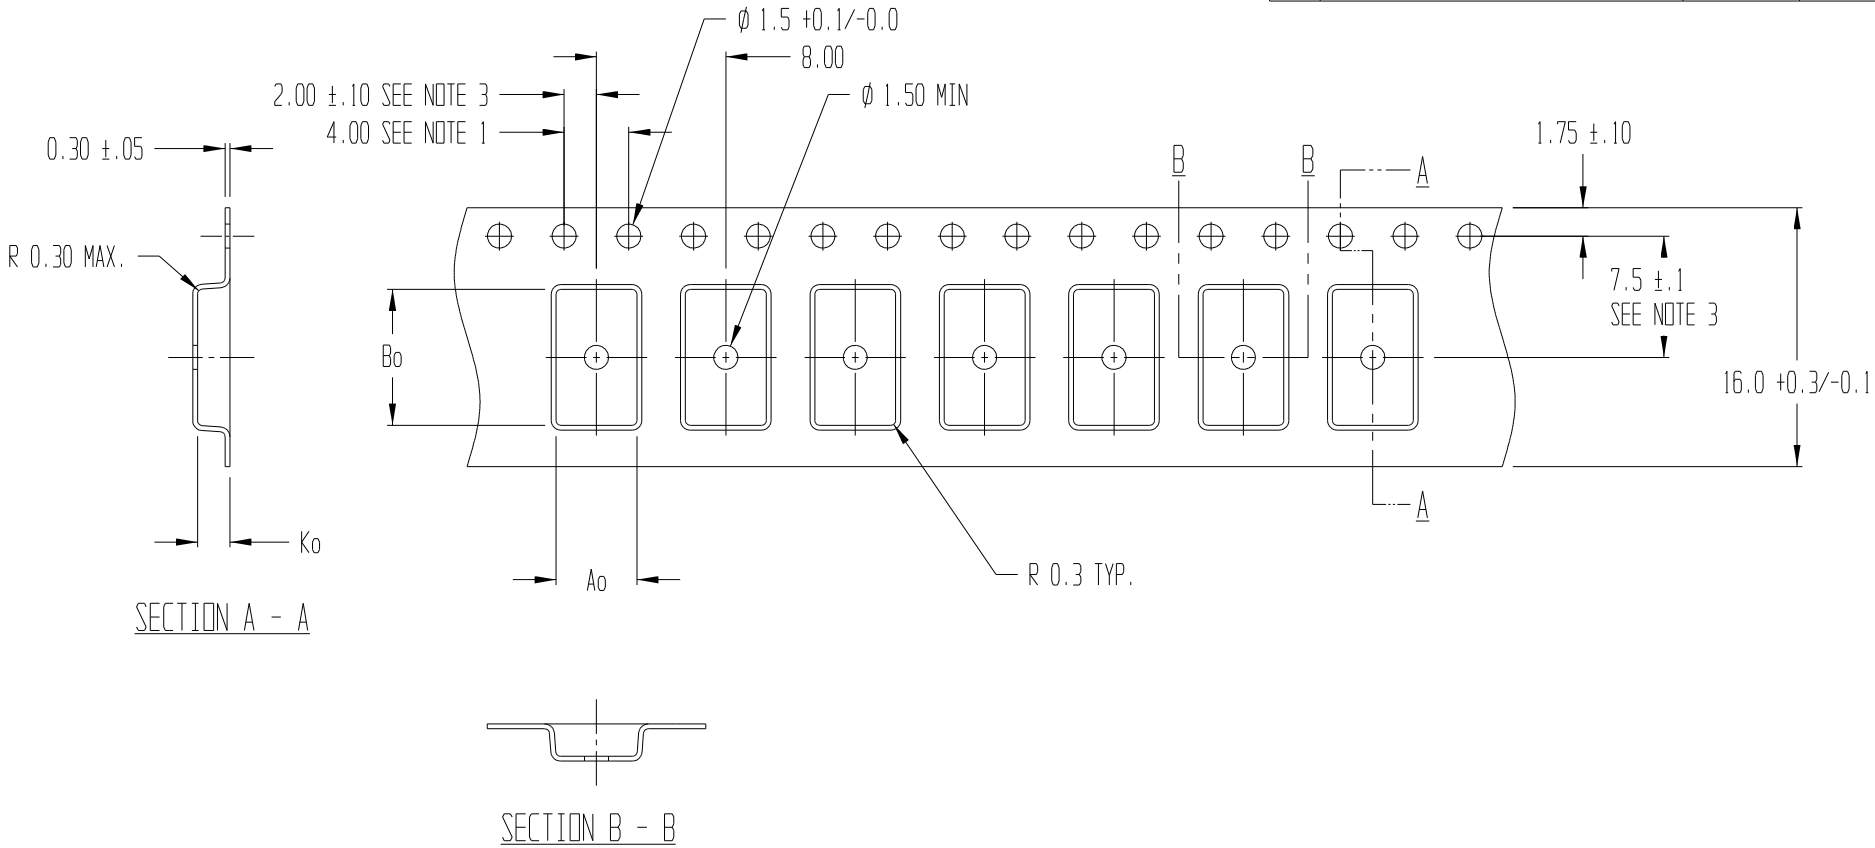

TITLE ADVANTEK PART DRAWING NUMBER CE0508-A CARRIER TAPE			
TOLERANCES - UNLESS NOTED 1PL ± 0.2 2PL ± 0.10	MATERIAL PS+C	DWG SIZE B	
ALL DIMS IN MILLIMETERS PER ASME Y14.5M			
DRAWN BY TPV	DATE 03/12/2009	SCALE 3:1	SHEET 1 OF 1
CK'D BY	PROJECT NO. 5148.00	DWG NO. T107461BT	REV