


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
2	WAS CUSTOM TOOL	8/9/11	BTH
3	RESTORED ORIGINAL WIDTH TOLERANCE	3/1/12	BTH

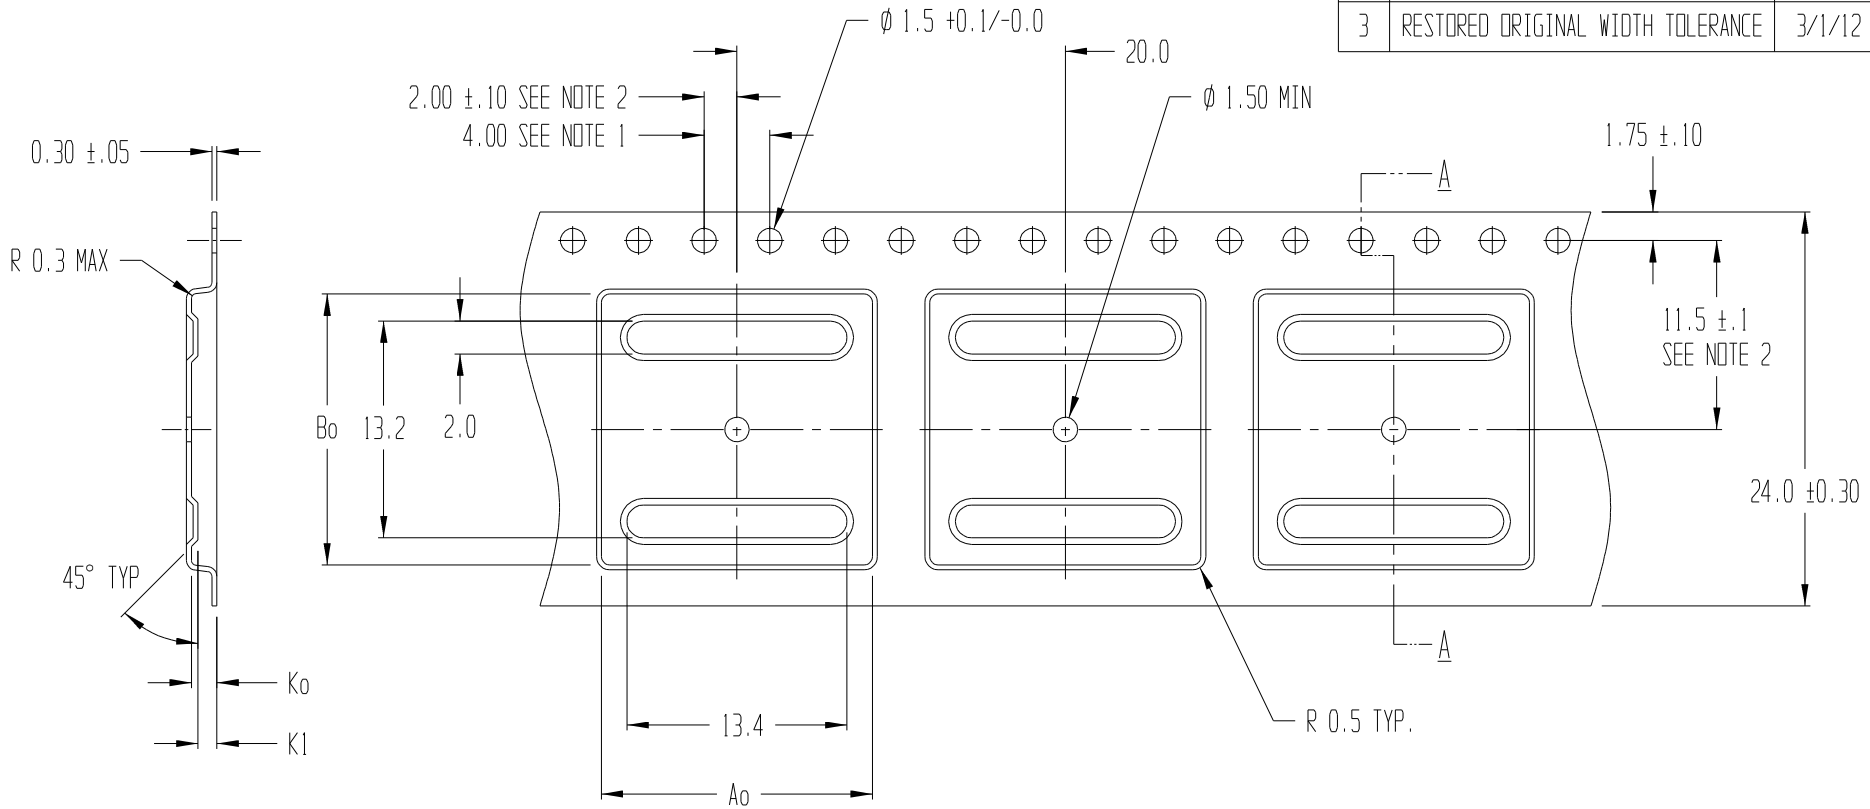

SECTION A - A

Ao = 16.50  
 Bo = 16.50  
 Ko = 1.55  
 K1 = 1.20

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE  $\pm 0.2$
2. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE
3. Ao AND Bo ARE CALCULATED ON A PLANE AT A DISTANCE "R" ABOVE THE BOTTOM OF THE POCKET.



TITLE ADVANTEK PART DRAWING NUMBER Q1414P-C CARRIER TAPE			
TOLERANCES - UNLESS NOTED 1PL $\pm 0.2$ 2PL $\pm 0.10$	MATERIAL PS+C	DWG SIZE B	
ALL DIMS IN MILLIMETERS PER ASME Y14.5M			
DRAWN BY T.S./BVB	DATE 8/7/97	SCALE 3:1	SHEET 1 OF 1
CK'D BY	PROJECT NO. 7667.00	DWG NO. A0808-97-1	REV 3