


| REVISIONS | | | |
|-----------|---|---------|----------|
| REV | DESCRIPTION | DATE | APPROVED |
| 1 | Added Black Conductive Polystyrene | 4/27/92 | CKS |
| 2 | Drwg. # incorrectly listed as A0103-89-18 | 3/30/93 | T.S. |
| 3 | Drawing format change | 8/23/02 | BTH |

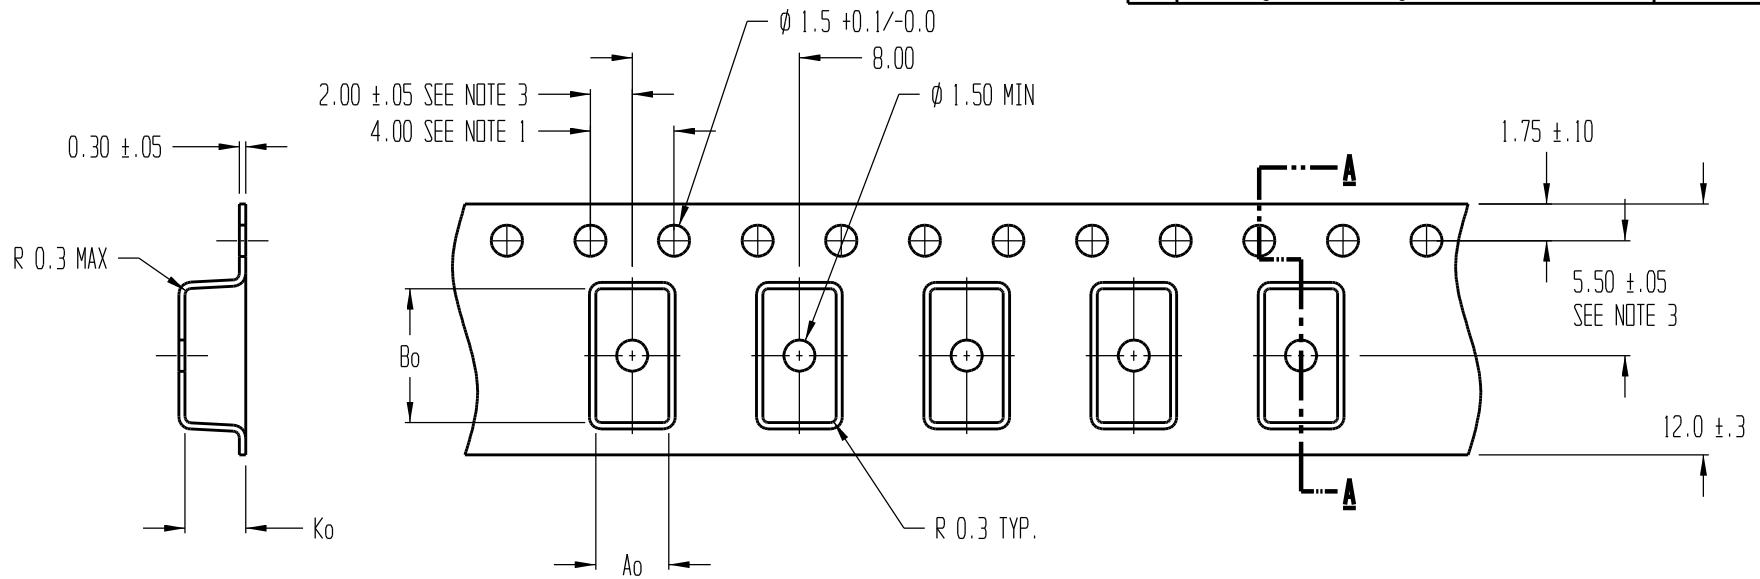

SECTION A - A

Ao = 3.50
Bo = 6.40
Ko = 2.90

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.2
2. CAMBER IN COMPLIANCE WITH EIA 481
3. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE



| | | | |
|---|--------------------|---------------|--------------|
| TITLE ADVANTEK PART DRAWING NUMBER TANT.C-A CARRIER TAPE | | | |
| TOLERANCES - UNLESS NOTED 1PL ± 0.2 2PL ± 0.10 | | MATERIAL PS+C | |
| ALL DIMENSIONS IN MILLIMETERS | | DWG SIZE B | |
| DRAWN BY CKS/BTH | DATE 12/28/88 | SCALE 4:1 | SHEET 1 OF 1 |
| REFERENCE NO. | DWG NO. A0121-86-3 | REV 3 | |