


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
3	WAS CLOSED TOOL	6/2/11	BTH
4	RESTORED ORIGINAL WIDTH TOLERANCE	5/1/12	BTH

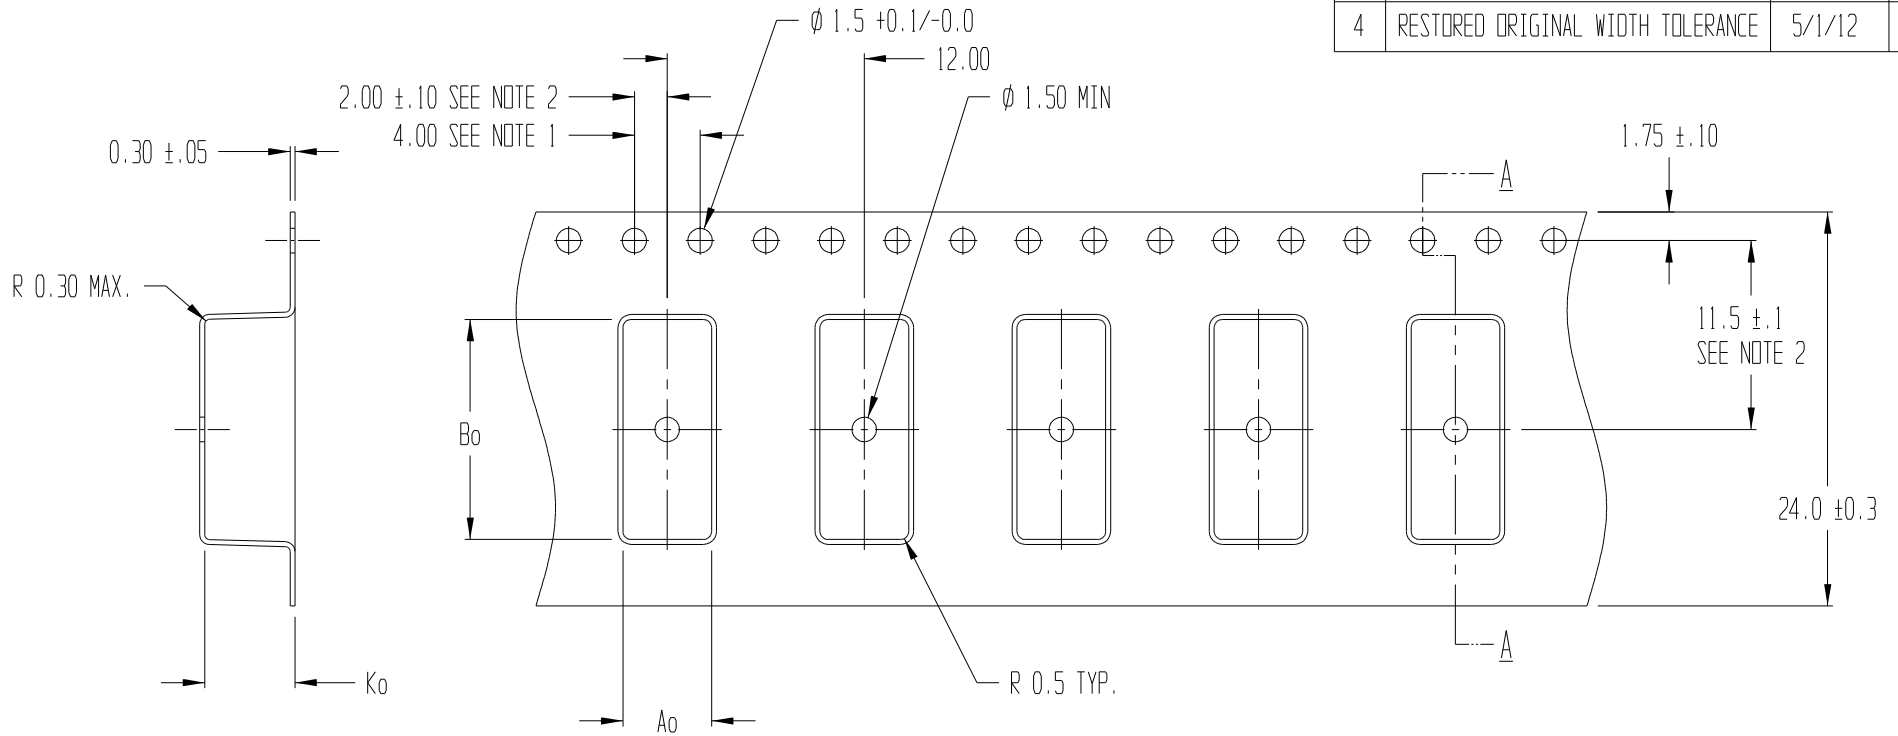

SECTION A - A

Ao = 5.40
Bo = 13.40
Ko = 5.50

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.2
2. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE
3. Ao AND Bo ARE CALCULATED ON A PLANE AT A DISTANCE "R" ABOVE THE BOTTOM OF THE POCKET.



TITLE ADVANTEK PART DRAWING NUMBER XTL24A-A CARRIER TAPE			
TOLERANCES - UNLESS NOTED 1PL ± 0.2 2PL ± 0.10	MATERIAL PS+C	DWG SIZE B	
ALL DIMS IN MILLIMETERS PER ASME Y14.5M			
DRAWN BY BJD	DATE 1/10/1989	SCALE 3:1	SHEET 1 OF 1
CK'D BY	PROJECT NO. 7417.00	DWG NO. A0227-89-6	REV 4