


| REVISIONS | | | |
|-----------|-----------------------|--------|----------|
| REV | DESCRIPTION | DATE | APPROVED |
| 1 | DRAWING FORMAT CHANGE | 8/7/01 | BTH |

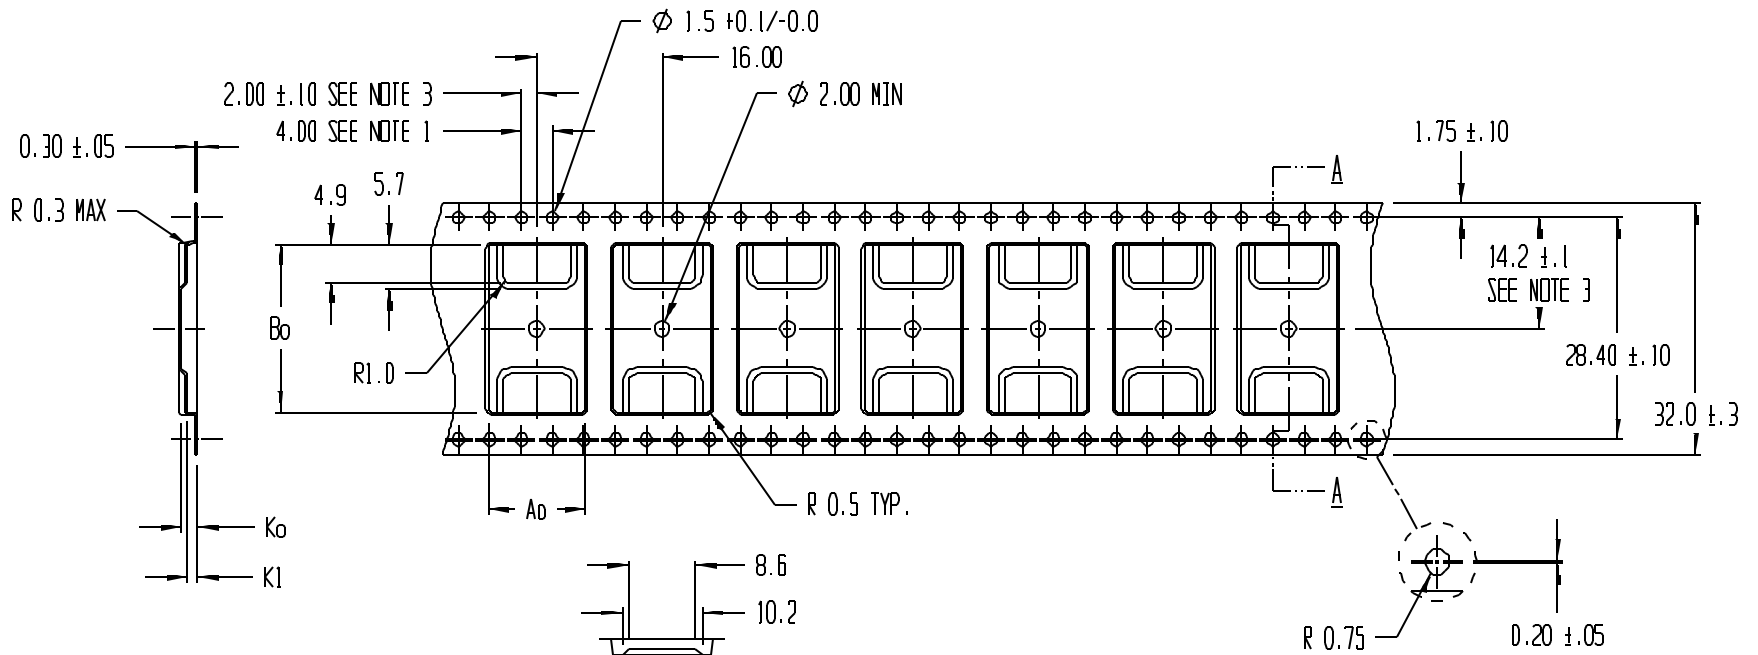

SECTION A - A

$A_0 = 12.40$
 $B_0 = 21.40$
 $K_0 = 2.10$
 $K_1 = 1.30$

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.2
2. CAMBER IN COMPLIANCE WITH EIA 481
3. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE

| | | | |
|--|--------------------|--|--------------|
| ADVANTEK | | | |
| TITLE ADVANTEK PART DRAWING NUMBER TSOP50-A TSOP 44/50 CARRIER TAPE | | | |
| TOLERANCES - UNLESS NOTED 1PL ± 0.2 2PL ± 0.10 | MATERIAL PS+C | ALL DIMENSIONS IN MILLIMETERS DWG SIZE B | |
| DRAWN BY T.S./BTH | DATE 2/8/94 | SCALE 3:2 | SHEET 1 OF 1 |
| REFERENCE NO. | DWG NO. A0407-94-4 | REV 1 | |