


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
1	WAS CLOSE TOOL	1/28/2011	XHL

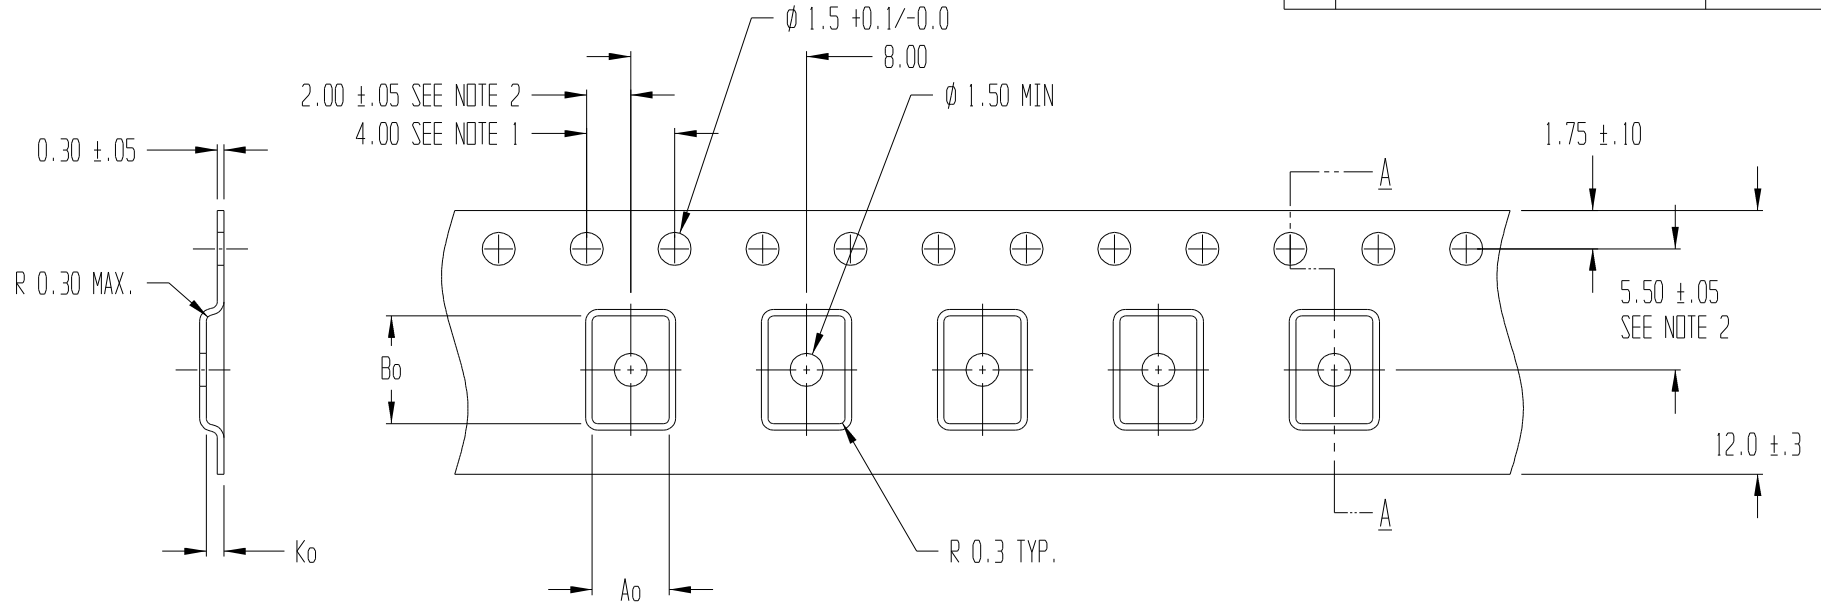

SECTION A - A

$A_0 = 3.50$
 $B_0 = 4.90$
 $K_0 = 0.80$

- NOTES:
- 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.2
 - POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE
 - A_0 AND B_0 ARE CALCULATED ON A PLANE AT A DISTANCE "R" ABOVE THE BOTTOM OF THE POCKET.



TITLE ADVANTEK PART DRAWING NUMBER 1812LF-A CARRIER TAPE			
TOLERANCES - UNLESS NOTED 1PL ± 0.2 2PL ± 0.10	MATERIAL PS+C	DWG SIZE B	
ALL DIMS IN MILLIMETERS PER ASME Y14.5M			
DRAWN BY TMD	DATE 9/15/1998	SCALE 4:1	SHEET 1 OF 1
CK'D BY	PROJECT NO. T-7640.01/7666.00	DWG NO. T101710AT	REV 2