


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
1	WAS CLOSE TOOL	1/28/2011	XHL

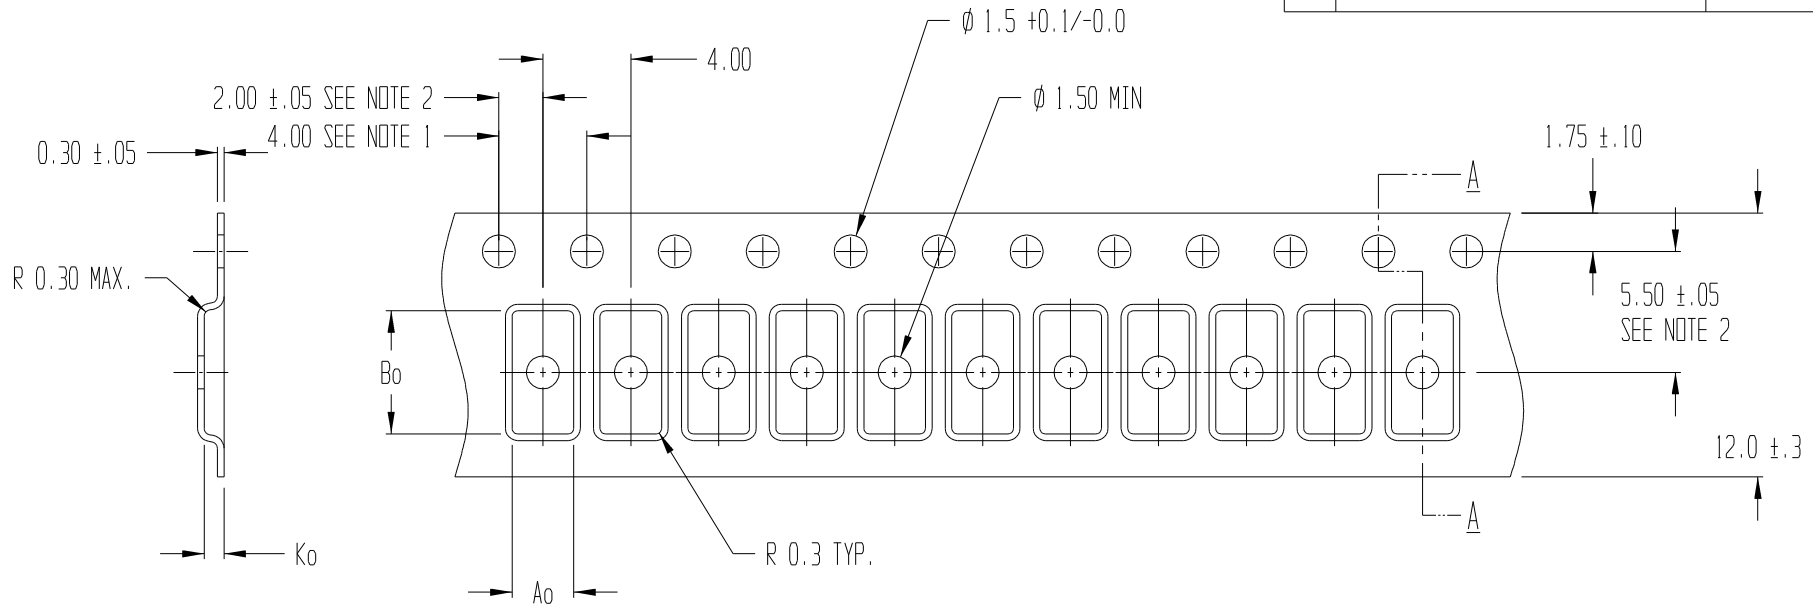

SECTION A - A

A<sub>0</sub> = 2.80  
 B<sub>0</sub> = 5.60  
 K<sub>0</sub> = 0.90

NOTES:

- 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ±0.2
- POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE
- A<sub>0</sub> AND B<sub>0</sub> ARE CALCULATED ON A PLANE AT A DISTANCE "R" ABOVE THE BOTTOM OF THE POCKET.



TITLE ADVANTEK PART DRAWING NUMBER 2010CH-A CARRIER TAPE			
TOLERANCES - UNLESS NOTED 1PL ±.2 2PL ±.10	MATERIAL PS+C	DWG SIZE B	
ALL DIMS IN MILLIMETERS PER ASME Y14.5M			
DRAWN BY T.S./SDC	DATE 8/18/94	SCALE 4:1	SHEET 1 OF 1
CK'D BY	PROJECT NO. A0818-94-1/7666.00	DWG NO. A0818-94-1	REV 4