


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
1	Ao was 6.4, Bo was 5.3, & added drop	10/18/96	RJB
2	Add bottom chamfer, Ao was 6.2, was -B	3/24/97	SOC
3	Drawing format change	10/17/02	BTH

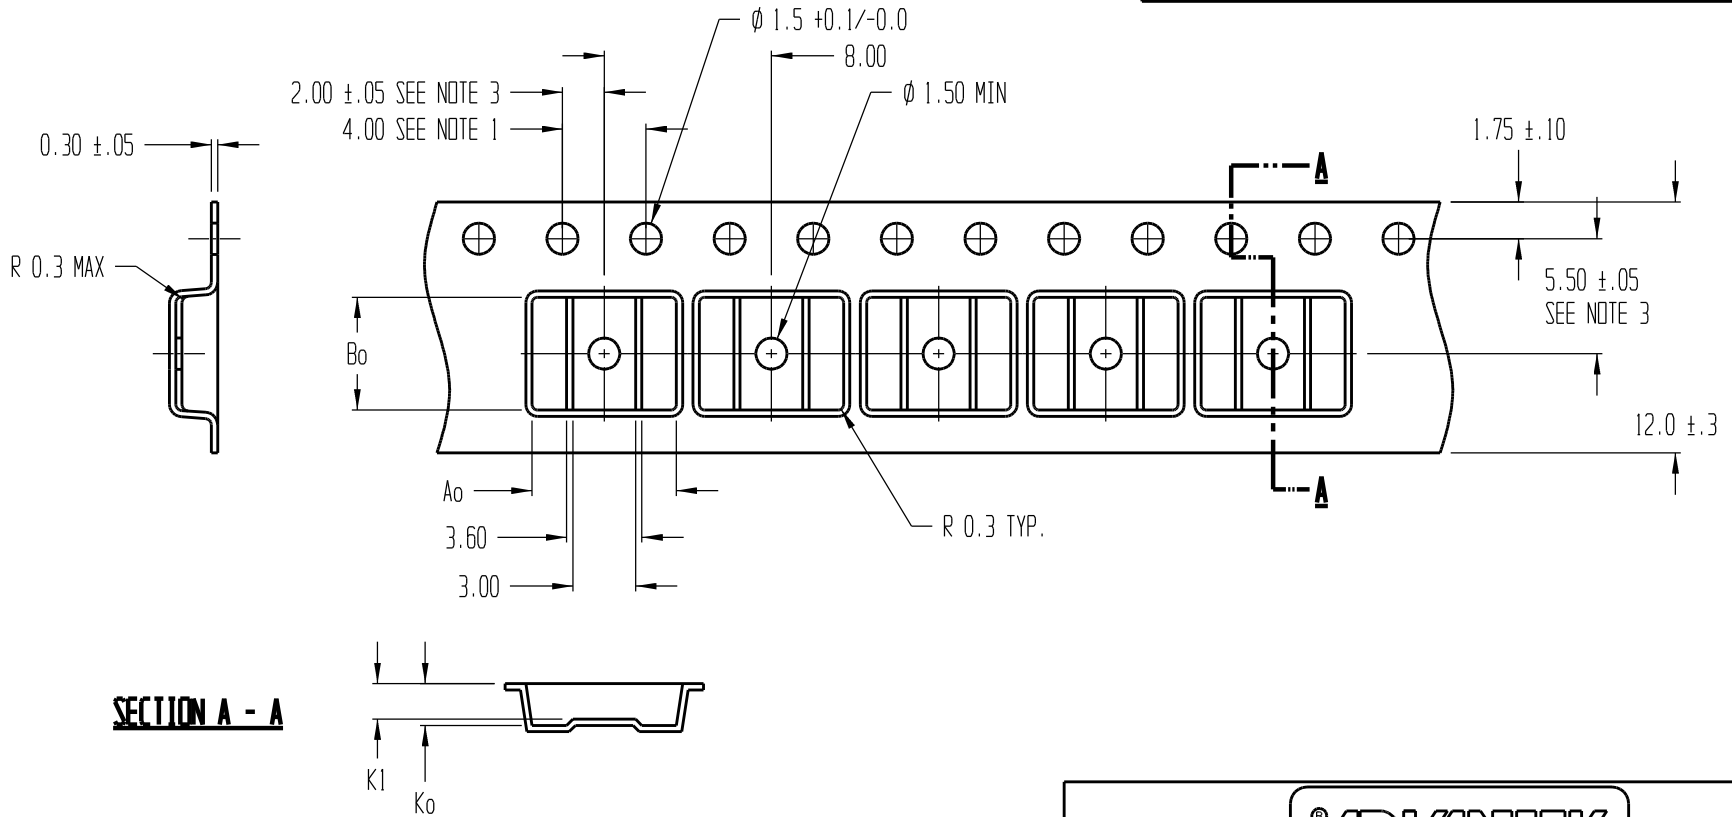

SECTION A - A

- NOTES:
1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.2
 2. CAMBER IN COMPLIANCE WITH EIA 481
 3. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE

- ②① Ao = 6.90
 ① Bo = 5.40
 Ko = 2.00
 K1 = 1.70

ADVANTEK			
TITLE ADVANTEK PART DRAWING NUMBER SDPO8P-A ② SDP 8 PIN CARRIER TAPE			
TOLERANCES - UNLESS NOTED 1PL ± 0.2 2PL ± 0.10	MATERIAL PS+C	ALL DIMENSIONS IN MILLIMETERS DWG SIZE B	
DRAWN BY T.S./BTH	DATE 3/5/93	SCALE 4:1	SHEET 1 OF 1
REFERENCE NO.	DWG NO. A0324-93-2	REV 3	