


| REVISIONS | | | |
|-----------|-----------------------|---------|----------|
| REV | DESCRIPTION | DATE | APPROVED |
| 1 | Drawing format change | 5/19/03 | BVB |

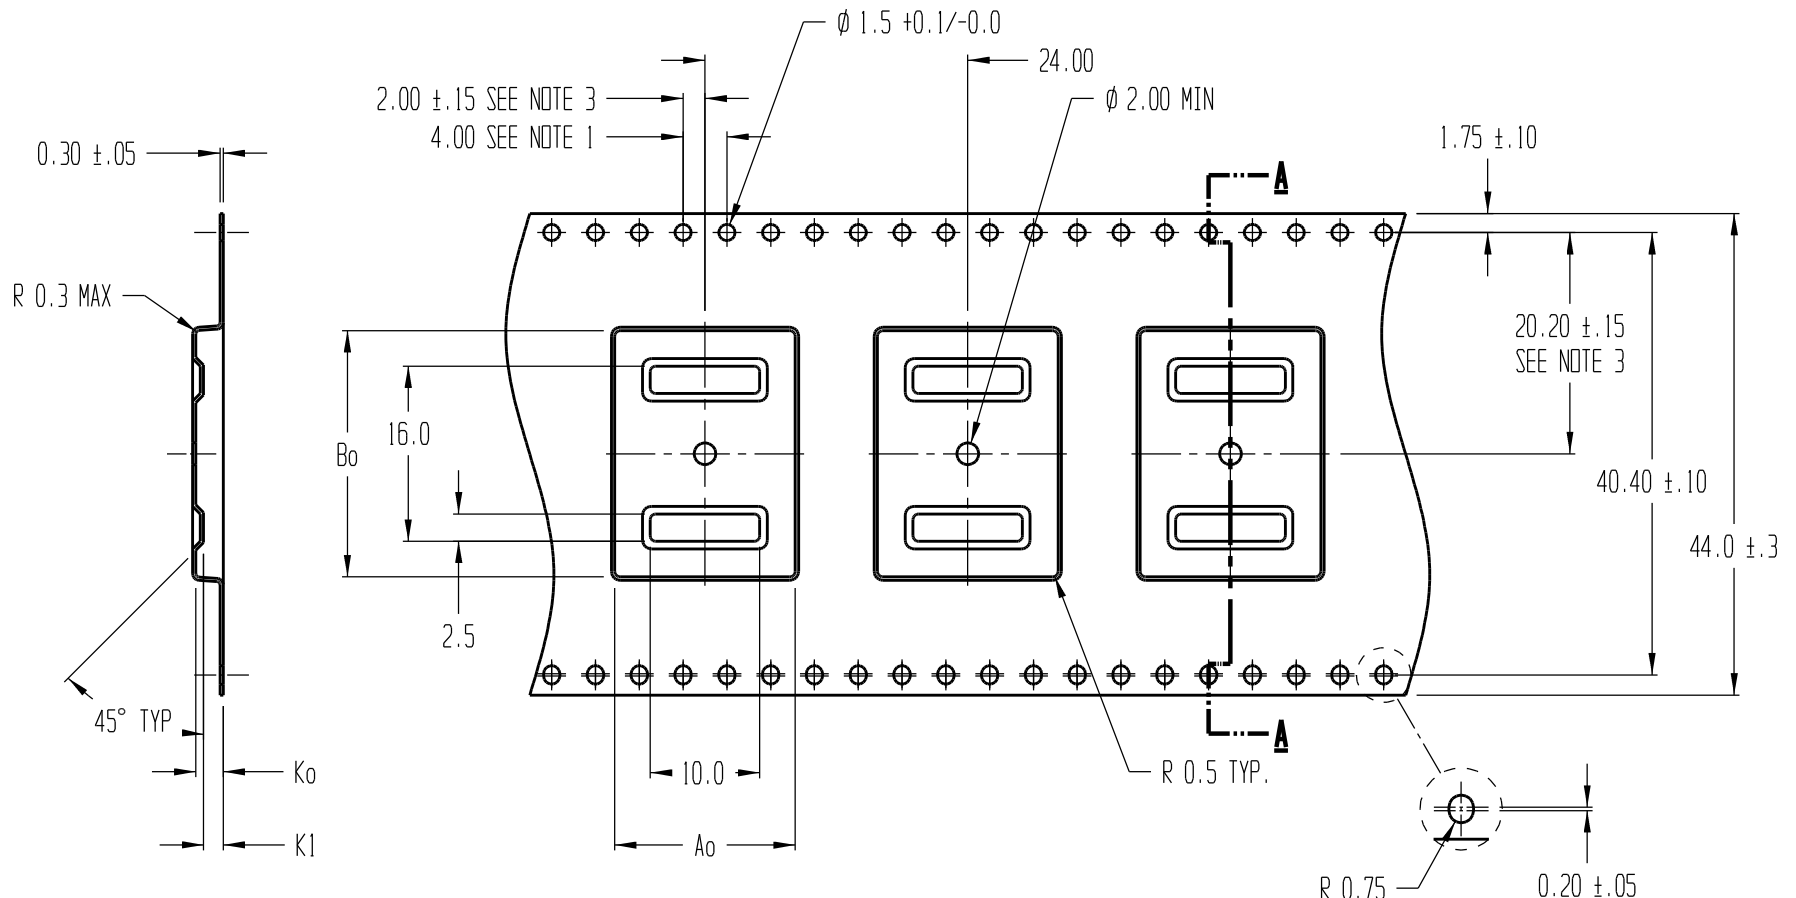

SECTION A - A

$A_0 = 16.50$
 $B_0 = 22.50$
 $K_0 = 2.50$
 $K_1 = 1.80$

- NOTES:
- 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.2
 - CAMBER IN COMPLIANCE WITH EIA 481
 - POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE



| | | | |
|---|--------------------|--|--------------|
| TITLE ADVANTEK PART DRAWING NUMBER Q1420P-C CARRIER TAPE | | | |
| TOLERANCES - UNLESS NOTED IPL ± 0.2 2PL ± 0.10 | MATERIAL PS+C | ALL DIMENSIONS IN MILLIMETERS DWG SIZE B | |
| DRAWN BY RJB/BVB | DATE 6/1/95 | SCALE 2:1 | SHEET 1 OF 1 |
| REFERENCE NO. | DWG NO. A0629-95-1 | REV 1 | |