


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
3	WAS CUSTOM TOOL	2/2/11	BTH

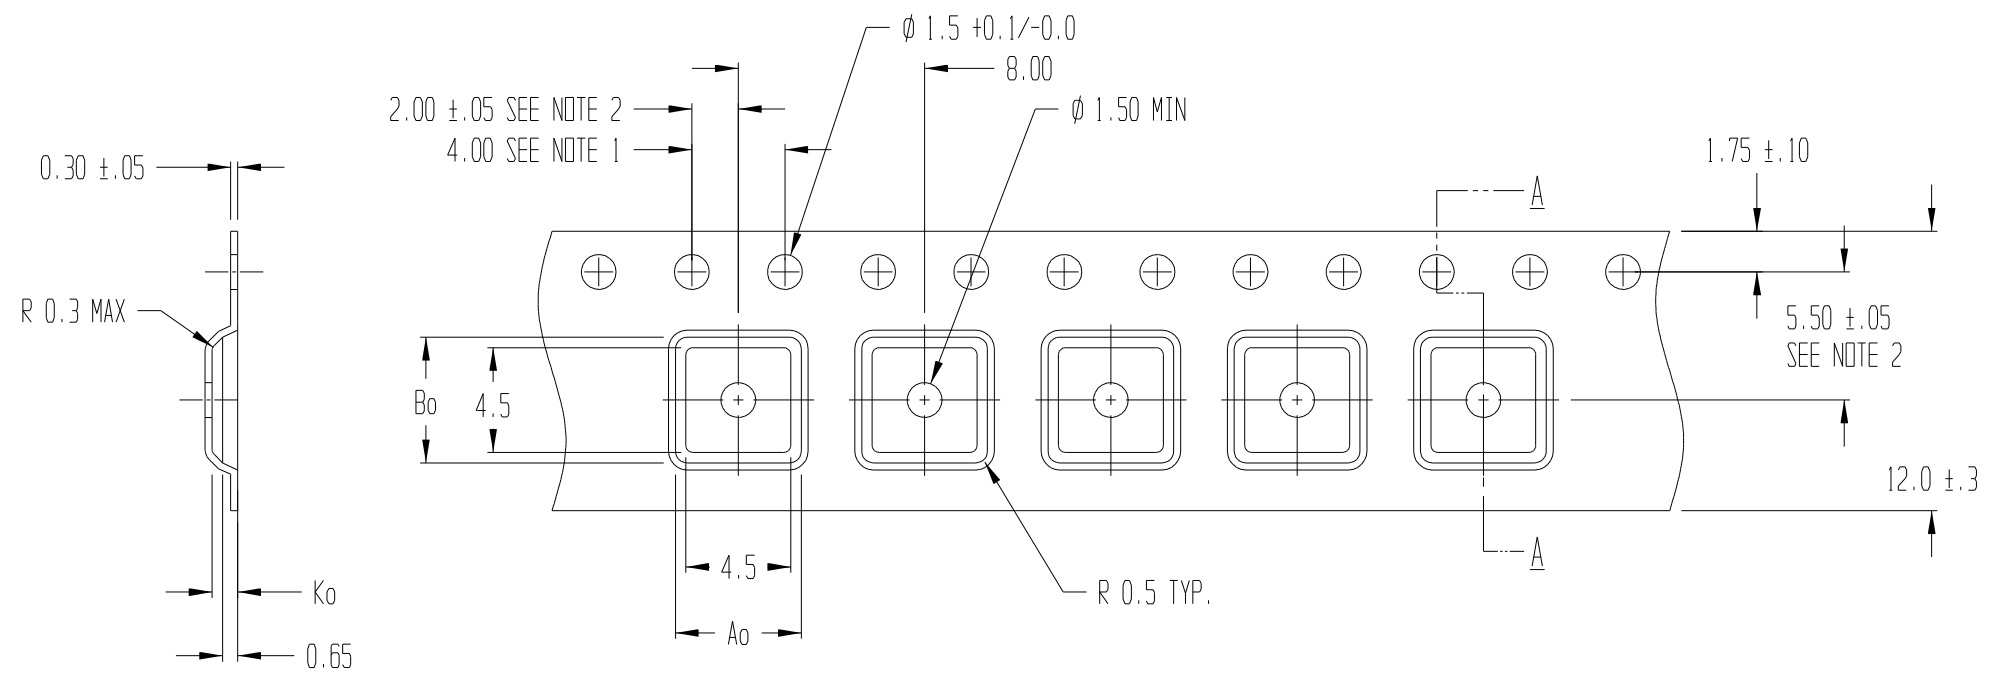

SECTION A - A

$A_o = 5.40$
 $B_o = 5.40$
 $K_o = 1.10$

- NOTES:
1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.2
 2. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE
 3. A_o AND B_o ARE CALCULATED ON A PLANE AT A DISTANCE "R" ABOVE THE BOTTOM OF THE POCKET.



TITLE ADVANTEK PART DRAWING NUMBER BG0505-A CARRIER TAPE			
TOLERANCES - UNLESS NOTED 1PL ± 0.2 2PL ± 0.10	MATERIAL PS+C	DWG SIZE B	
ALL DIMS IN MILLIMETERS PER ASME Y14.5M			
DRAWN BY RJB/BVB	DATE 8/26/99	SCALE 4:1	SHEET 1 OF 1
CK'D BY	PROJECT NO. T-8842-A/ 7417.00	DWG NO. T102491AT	REV 3