


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
1	WAS CLOSE TOOL	1/28/2011	XHL

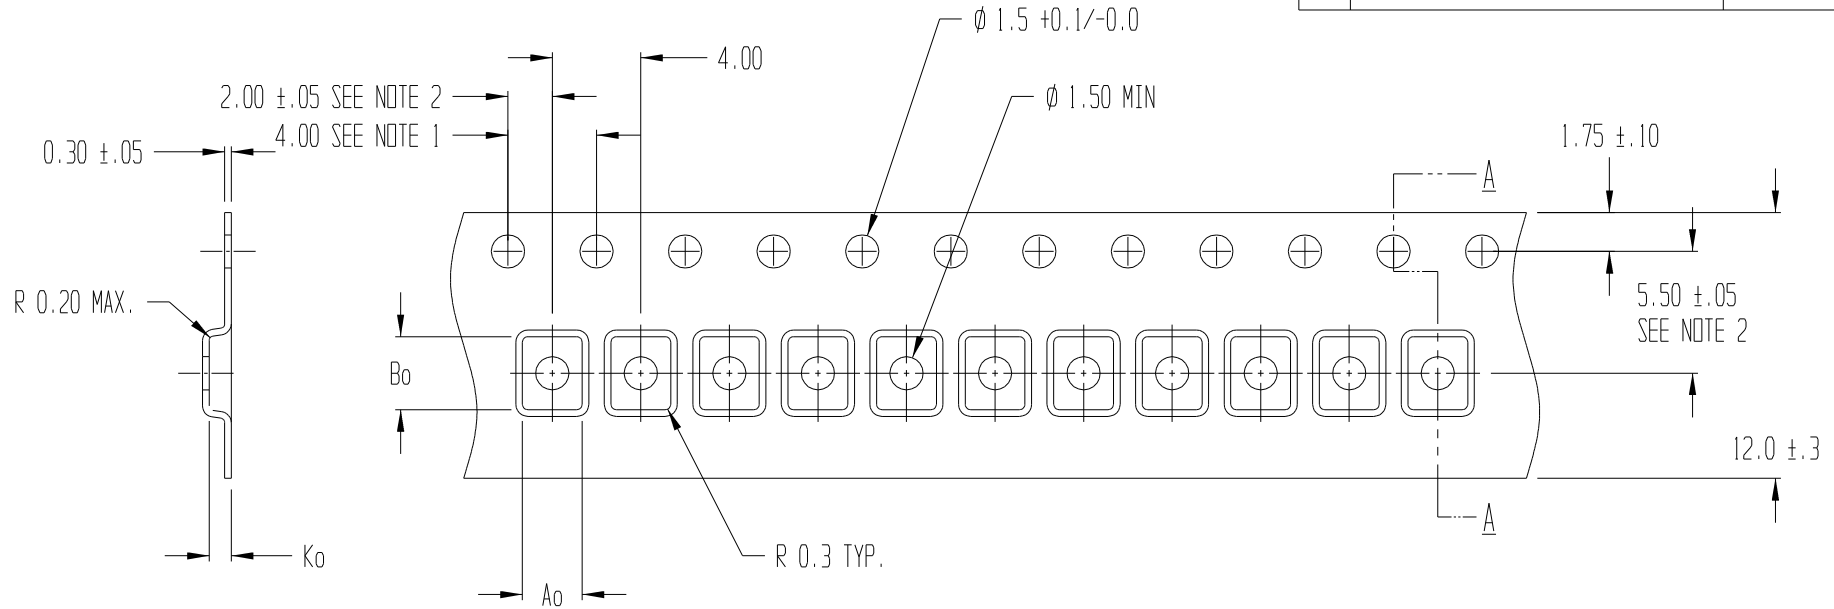

SECTION A - A

$A_o = 2.70$   
 $B_o = 3.30$   
 $K_o = 1.00$

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE  $\pm 0.2$
2. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE
3.  $A_o$  AND  $B_o$  ARE CALCULATED ON A PLANE AT A DISTANCE "R" ABOVE THE BOTTOM OF THE POCKET.



TITLE ADVANTEK PART DRAWING NUMBER DELC80-A CARRIER TAPE			
TOLERANCES - UNLESS NOTED 1PL $\pm .2$ 2PL $\pm .10$	MATERIAL PS+C	DWG SIZE B	
ALL DIMS IN MILLIMETERS PER ASME Y14.5M			
DRAWN BY RVR	DATE 04/16/2004	SCALE 4:1	SHEET 1 OF 1
CK'D BY	PROJECT NO. T-12869/7666.00	DWG NO. T104752BT	REV 1