


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
1	WAS CLOSE TOOL	1/28/2011	XHL

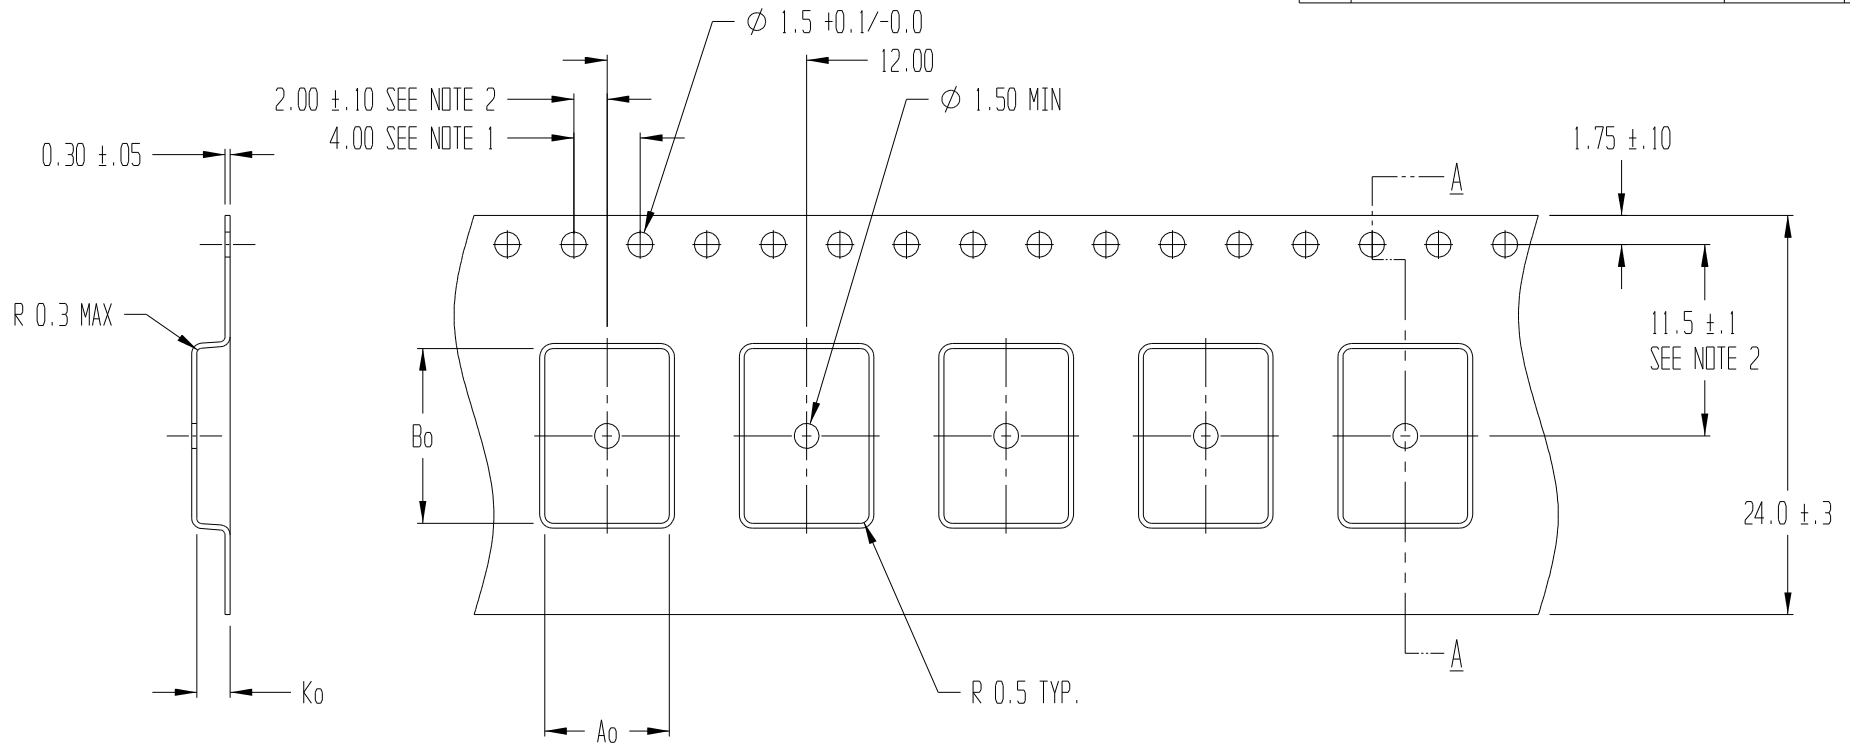

SECTION A - A

$A_0 = 7.50$
 $B_0 = 10.50$
 $K_0 = 2.00$

NOTES:

- 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.2
- POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE
- A_0 AND B_0 ARE CALCULATED ON A PLANE AT A DISTANCE "R" ABOVE THE BOTTOM OF THE POCKET.



ADVANTEK engineered confidence™			
TITLE ADVANTEK PART DRAWING NUMBER ALPH08-A CARRIER TAPE			
TOLERANCES - UNLESS NOTED 1PL ± 0.2 2PL ± 0.10	MATERIAL PS+C	DWG SIZE B	
ALL DIMS IN MILLIMETERS PER ASME Y14.5M			
DRAWN BY BTH	DATE 08/02/2000	SCALE 3:1	SHEET 1 OF 1
CK'D BY	PROJECT NO. T-10302/7666.00	DWG NO. T103002BT	REV 1