


| REVISIONS | | | |
|-----------|-----------------|-----------|----------|
| REV | DESCRIPTION | DATE | APPROVED |
| 1 | WAS CUSTOM TOOL | 7/28/2011 | XHL |

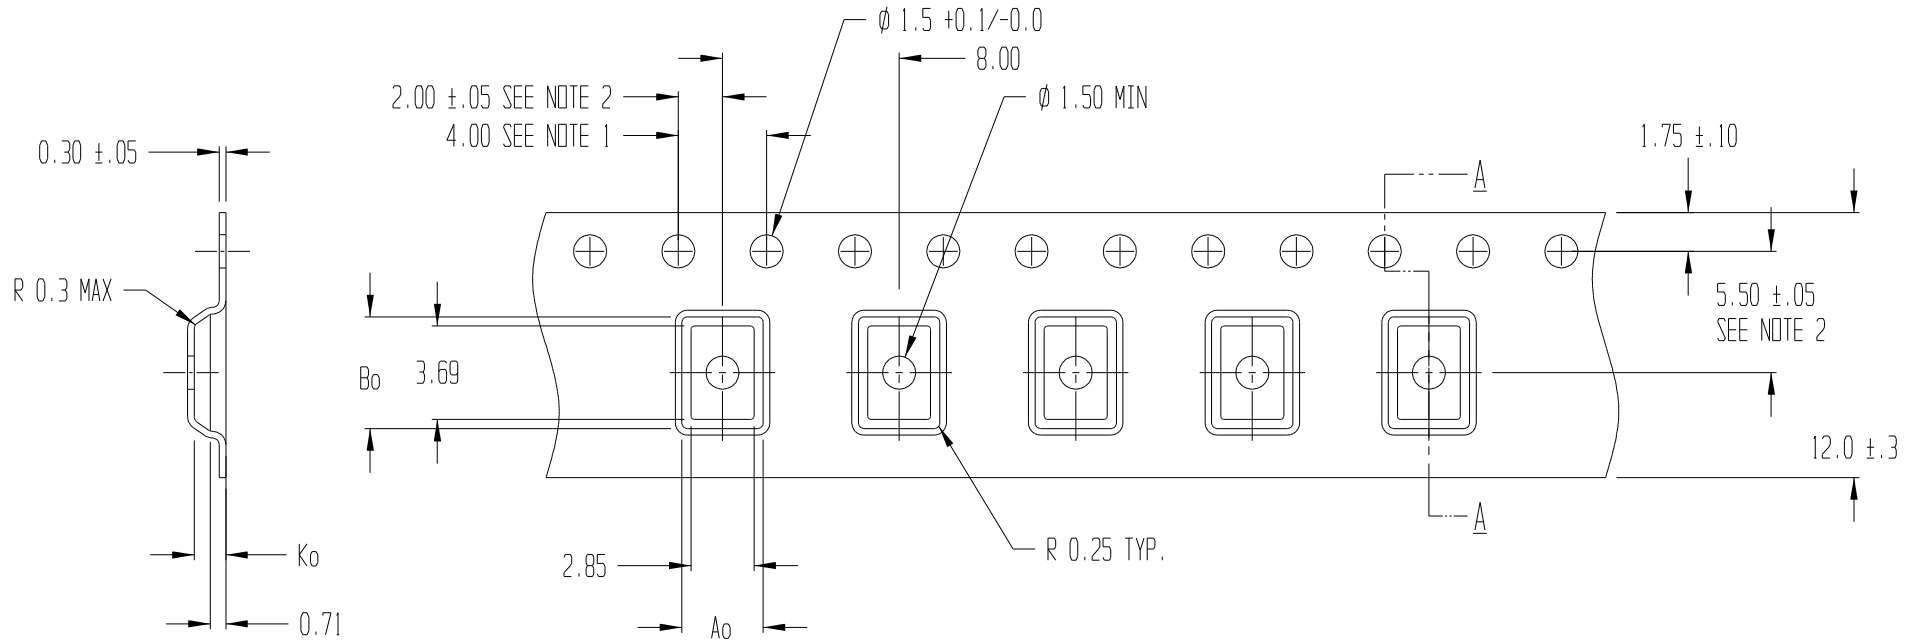

SECTION A - A

$A_o = 3.68$
 $B_o = 4.52$
 $K_o = 1.43$

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.2
2. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE
3. A_o AND B_o ARE CALCULATED ON A PLANE AT A DISTANCE "R" ABOVE THE BOTTOM OF THE POCKET.



| | | | |
|---|----------------------------|-------------------|--------------|
| TITLE ADVANTEK PART DRAWING NUMBER A19876-A CARRIER TAPE | | | |
| TOLERANCES - UNLESS NOTED 1PL ± 0.2 2PL ± 0.10 | MATERIAL PS+C | DWG SIZE B | |
| ALL DIMS IN MILLIMETERS PER ASME Y14.5M | | | |
| DRAWN BY RJB/BVB | DATE 8/13/99 | SCALE 4:1 | SHEET 1 OF 1 |
| CK'D BY | PROJECT NO. T-8974/7667.00 | DWG NO. T102478AT | REV 2 |