


REVISIONS

NO.	DESCRIPTION	DATE	BY

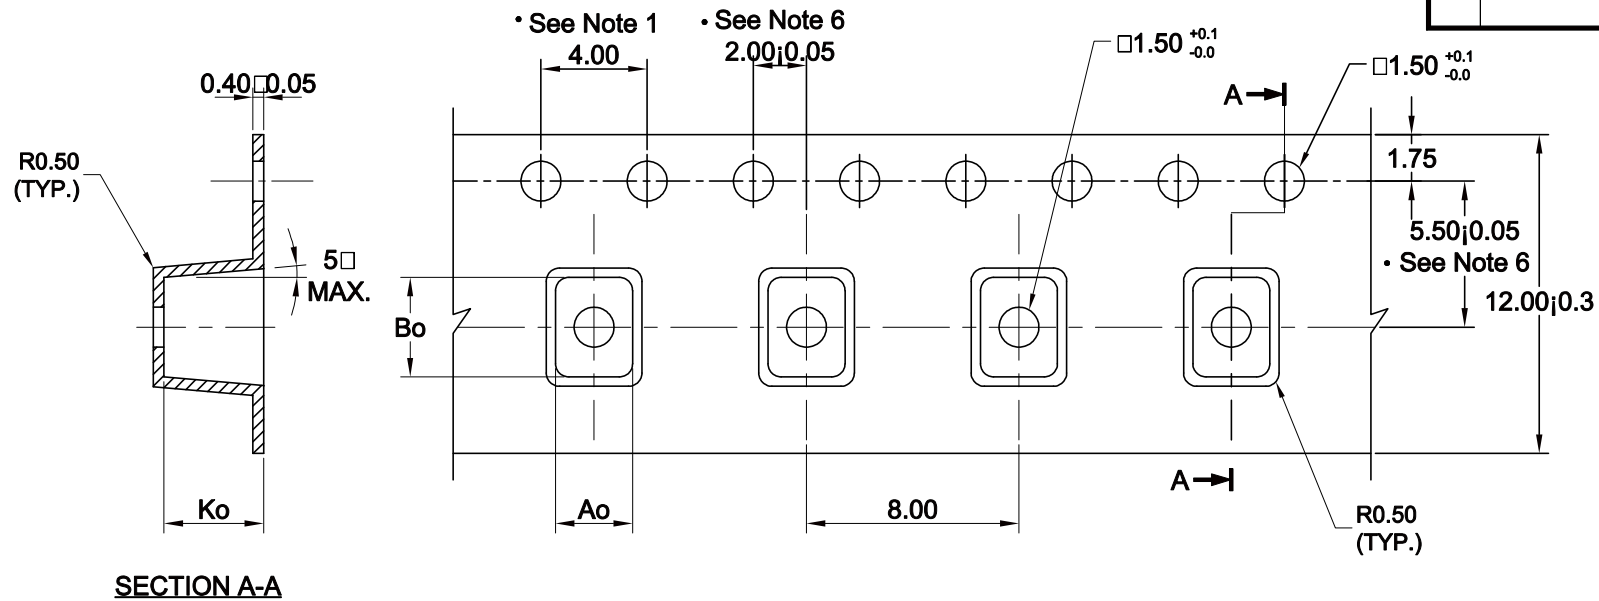

SECTION A-A

Notes:

- 10 sprocket hole pitch cumulative tolerance ≤ 0.2
- Camber not to exceed 1mm in 100mm.
- Material: Black Advantek Polystyrene.
- Ao and Bo measured on a plane 0.3mm above the bottom of the pocket.
- Ko measured from a plane on the inside bottom of the pocket to the top surface of the carrier tape.
- Pocket position relative to sprocket hole measured as true position of pocket, not pocket hole.

Ao= 2.90mm
 Bo= 3.75mm
 Ko= 3.75mm

-All Dimensions in Millimeters-

TOLERANCES (EXCEPT AS NOTED)	Advantek Part Number TOPLEDT-B Carrier Tape		
DECIMAL ± 0.1	ADVANTEK CARRYING TOMORROW™		
FRACTIONAL \pm	DRAWN BY Tony weng	SCALE 3.5/1	MATERIAL See Note 3
ANGULAR \pm	REFERENCE NO.	DATE 05/17/05	DRAWING NO. REV B0517-05-1 0.
	CHK'D Oscar	APP'D Stanley	