


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
2	WAS A CUSTOM TOOL	8/24/11	TMD

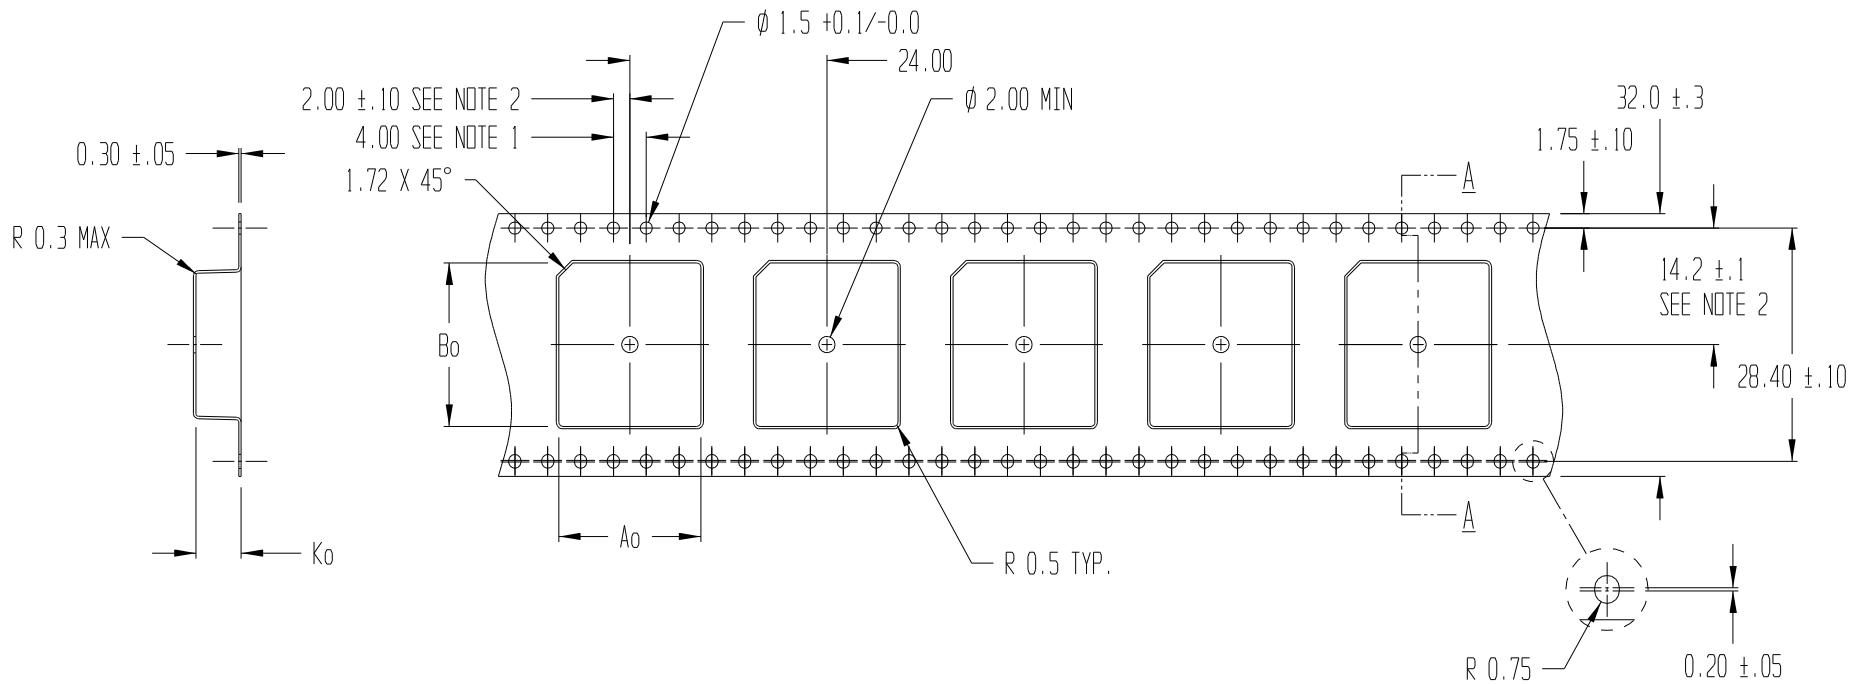

SECTION A - A

$A_0 = 17.30$   
 $B_0 = 19.90$   
 $K_0 = 5.50$

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE  $\pm 0.2$
2. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE
3.  $A_0$  AND  $B_0$  ARE CALCULATED ON A PLANE AT A DISTANCE "R" ABOVE THE BOTTOM OF THE POCKET.



**ADVANTEK**<sup>®</sup>  
engineered confidence™

TITLE ADVANTEK PART DRAWING NUMBER PLCA32-A CARRIER TAPE			
TOLERANCES - UNLESS NOTED 1PL $\pm 0.2$ 2PL $\pm 0.10$	MATERIAL PS+C	DWG SIZE B	
ALL DIMS IN MILLIMETERS PER ASME Y14.5M			
DRAWN BY RJB/BVB	DATE 10/7/96	SCALE 3:2	SHEET 1 OF 1
CK'D BY	PROJECT NO. T-6462 / 7667.00	DWG NO. A1014-96-3	REV 2