


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
4	WAS CUSTOM TOOL	02/08/11	VAW

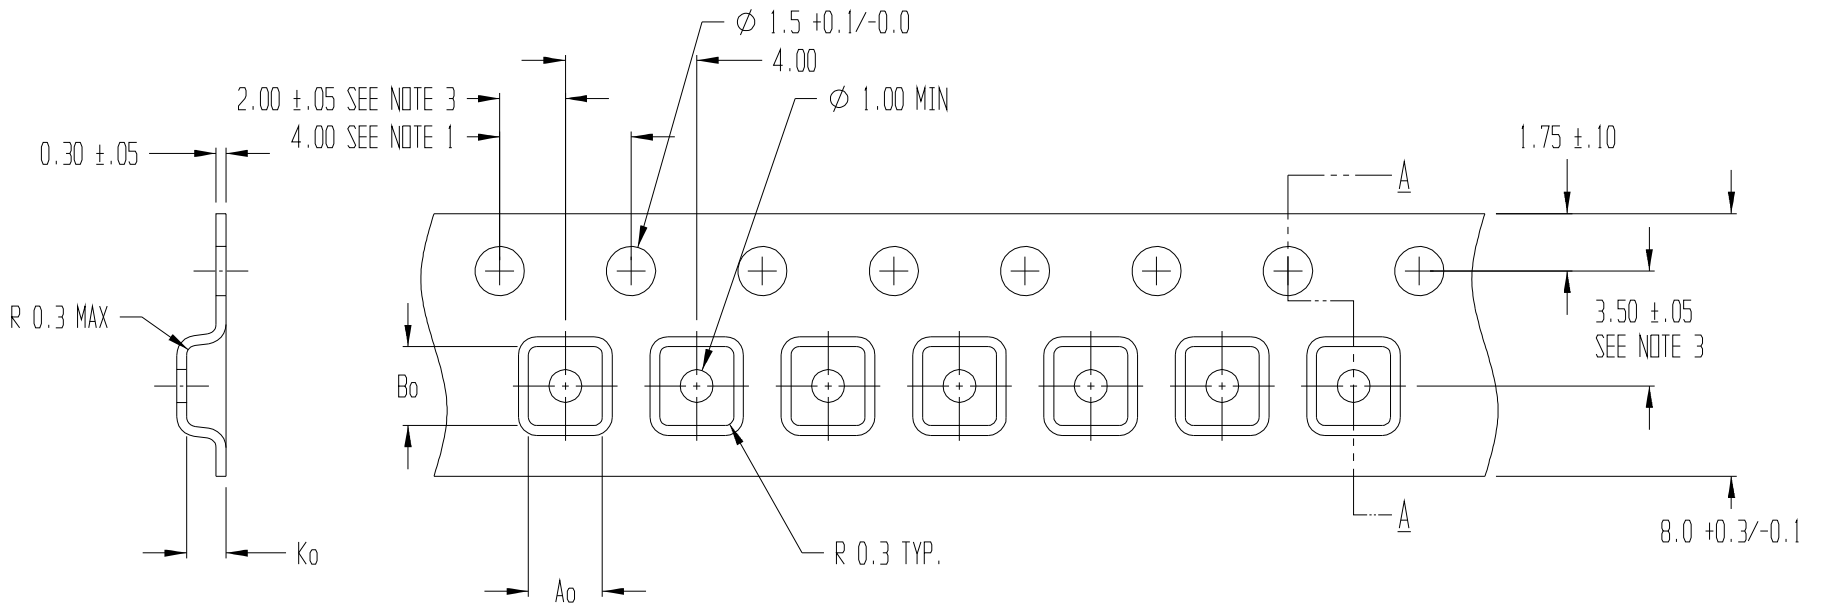

SECTION A - A

$A_0 = 2.25$   
 $B_0 = 2.40$   
 $K_0 = 1.20$

NOTES:

- 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE  $\pm 0.2$
- POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE
- $A_0$  AND  $B_0$  ARE CALCULATED ON A PLANE AT A DISTANCE "R" ABOVE THE BOTTOM OF THE POCKET.



**ADVANTEK**<sup>®</sup>  
engineered confidence™

TITLE ADVANTEK PART DRAWING NUMBER SC70NS-A CARRIER TAPE			
TOLERANCES - UNLESS NOTED 1PL $\pm 0.2$ 2PL $\pm 0.10$		MATERIAL PS+C	
DRAWN BY RJB/bth		DATE 6/4/97	SCALE 6:1
REFERENCE NO. T-6793 / 7471.00		DWG NO. A0710-97-2	SHEET 1 OF 1
			REV 4