


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
1.	WAS A CUSTOM TOOL	08/30/11	JH

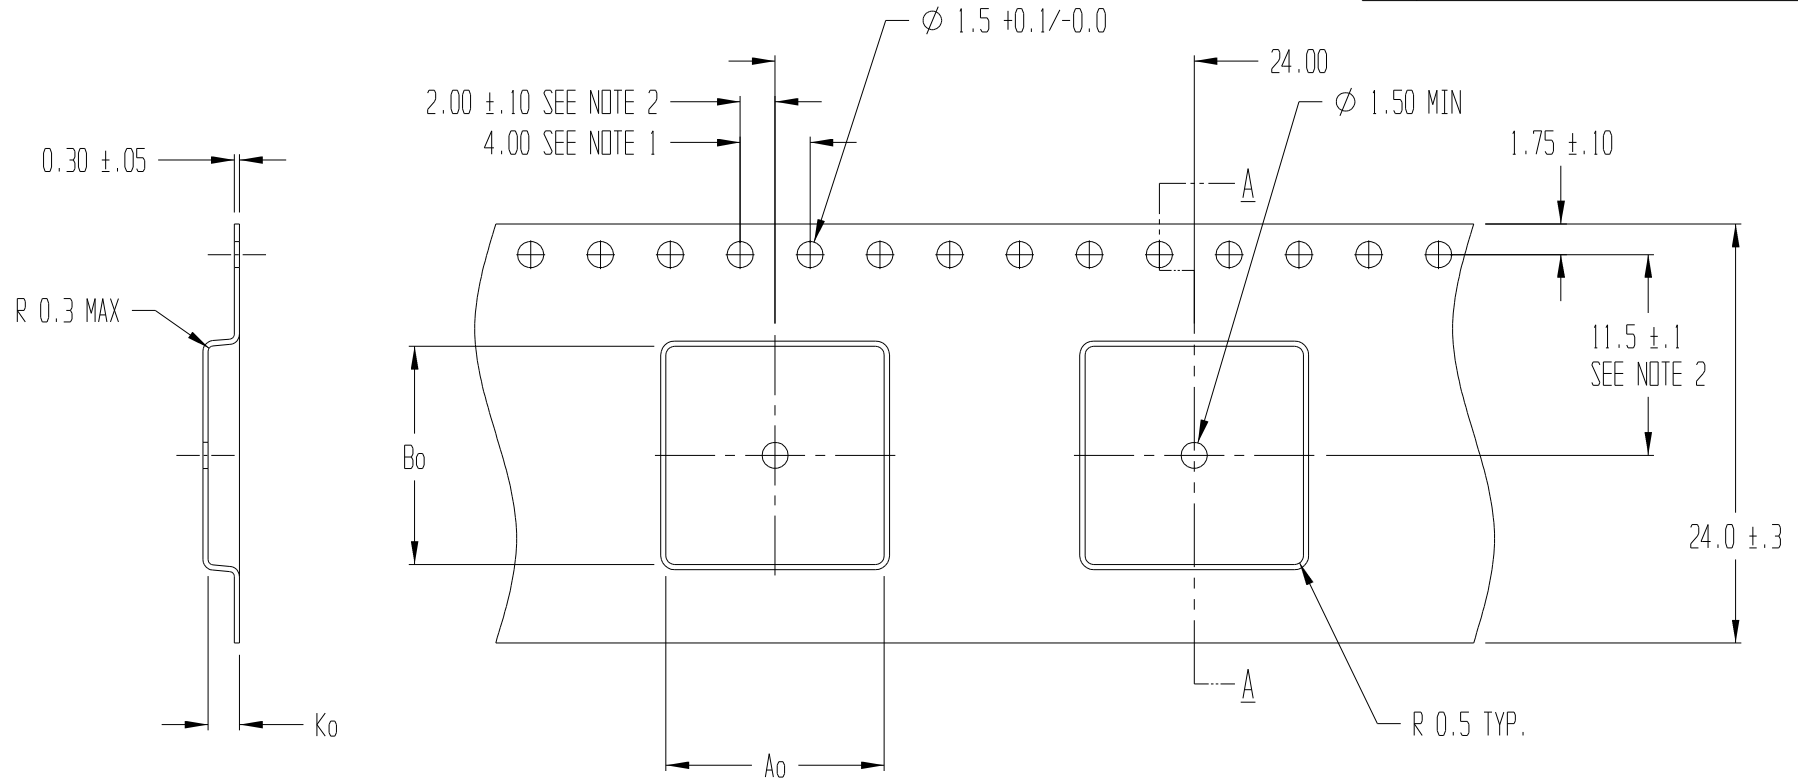

SECTION A - A

Ao = 12.50  
Bo = 12.50  
Ko = 1.80

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE  $\pm 0.2$
2. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE
3. Ao AND Bo ARE CALCULATED ON A PLANE AT A DISTANCE "R" ABOVE THE BOTTOM OF THE POCKET.



**ADVANTEK**<sup>®</sup>  
engineered confidence™

TITLE ADVANTEK PART DRAWING NUMBER BG1212-D CARRIER TAPE			
TOLERANCES - UNLESS NOTED 1PL $\pm 0.2$ 2PL $\pm 0.10$	MATERIAL PS+C	DWG SIZE B	
ALL DIMS IN MILLIMETERS PER ASME Y14.5M			
DRAWN BY TMD	DATE 01/11/00	SCALE 3:1	SHEET 1 OF 1
CK'D BY	PROJECT NO. T-9501 / 7667.00	DWG NO. T102677BT	REV 1