


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
3	WAS CUSTOM TOOL	8/31/11	BTH
4	RESTORED ORIGINAL WIDTH TOLERANCE	9/21/12	BTH

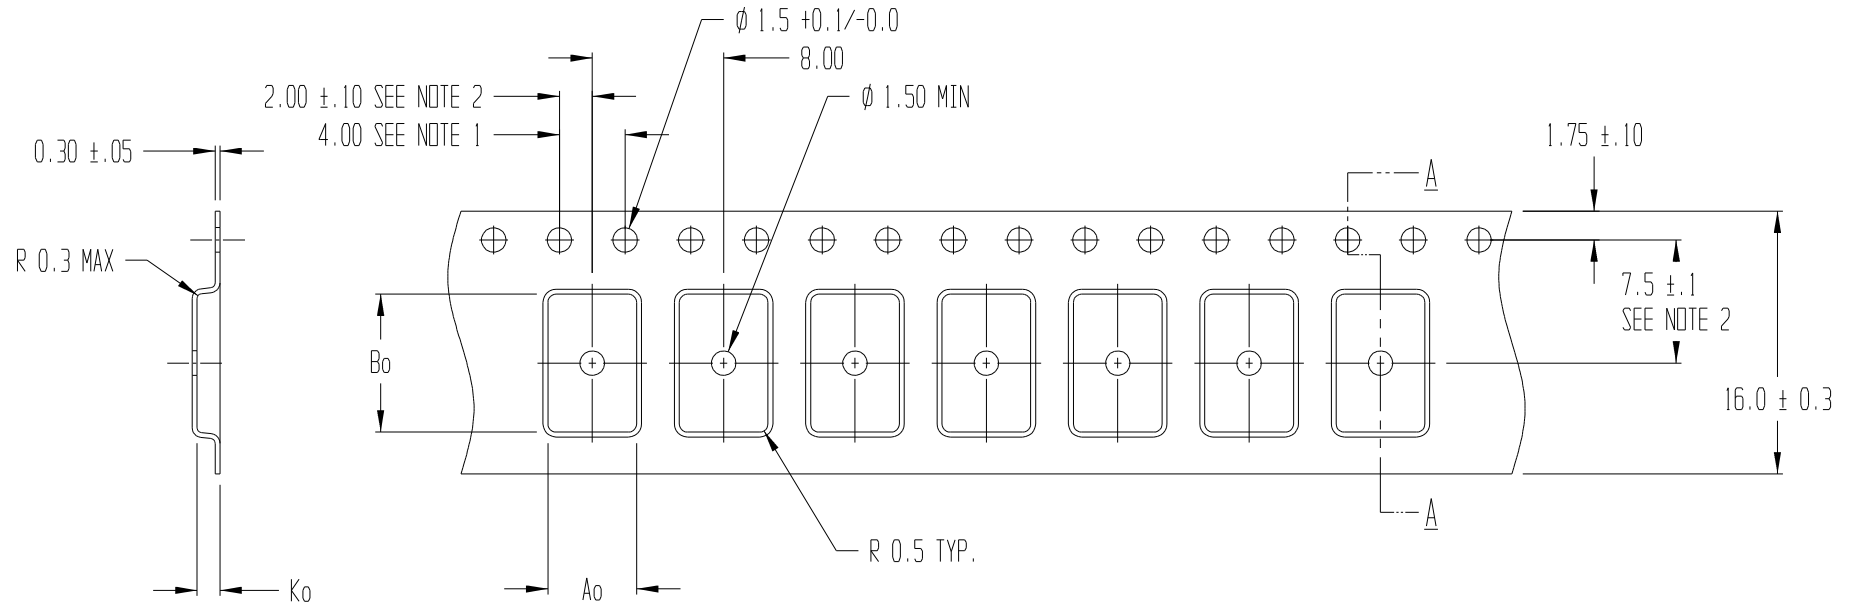

SECTION A - A

$A_o = 5.40$   
 $B_o = 8.40$   
 $K_o = 1.40$

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE  $\pm 0.2$
2. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE
3.  $A_o$  AND  $B_o$  ARE CALCULATED ON A PLANE AT A DISTANCE "R" ABOVE THE BOTTOM OF THE POCKET.



TITLE ADVANTEK PART DRAWING NUMBER SOP5X8-A CARRIER TAPE			
TOLERANCES - UNLESS NOTED 1PL $\pm 0.2$ 2PL $\pm 0.10$	MATERIAL PS+C	DWG SIZE B	
ALL DIMS IN MILLIMETERS PER ASME Y14.5M			
DRAWN BY RJB/BVB	DATE 7/20/99	SCALE 3:1	SHEET 1 OF 1
CK'D BY	PROJECT NO. T-8887/ 7667.00	DWG NO. T102379AT	REV 4