


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
3	WAS CUSTOM TOOL	8/12/11	BTH

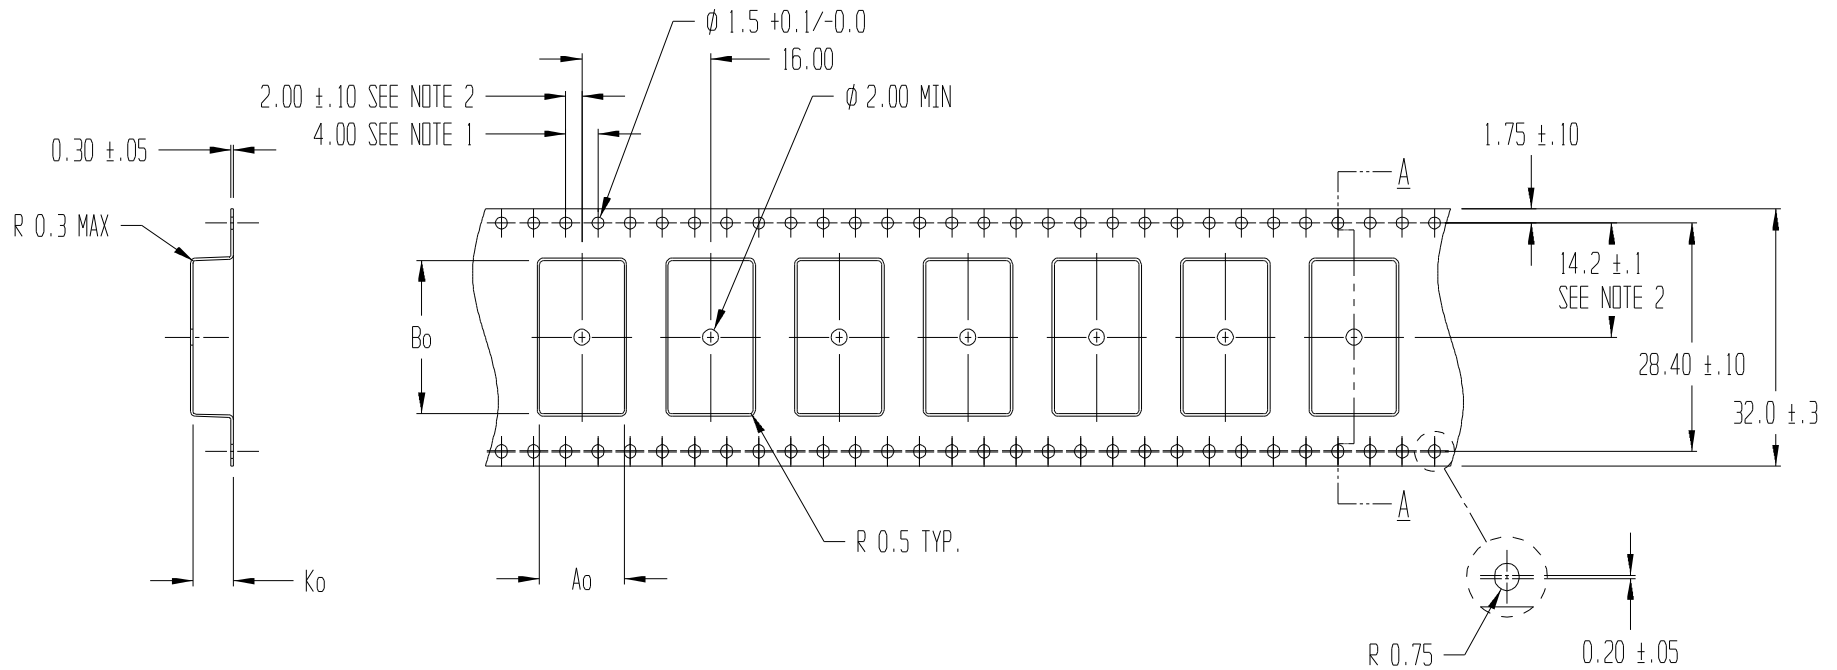

SECTION A - A

$A_0 = 10.53$
 $B_0 = 19.06$
 $K_0 = 5.00$

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.2
2. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE
3. A_0 AND B_0 ARE CALCULATED ON A PLANE AT A DISTANCE "R" ABOVE THE BOTTOM OF THE POCKET.



ADVANTEK[®]
engineered confidence™

TITLE ADVANTEK PART DRAWING NUMBER SJI-28-C CARRIER TAPE			
TOLERANCES - UNLESS NOTED 1PL ± 0.2 2PL ± 0.10	MATERIAL PS+C	DWG SIZE B	
ALL DIMS IN MILLIMETERS PER ASME Y14.5M			
DRAWN BY SOC/BVB	DATE 7/26/95	SCALE 3:2	SHEET 1 OF 1
CK'D BY	PROJECT NO. T-5063/ 7667.00	DWG NO. A1018-95-5	REV 3