


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
2	WAS CLOSED TOOL	3/21/11	BTH

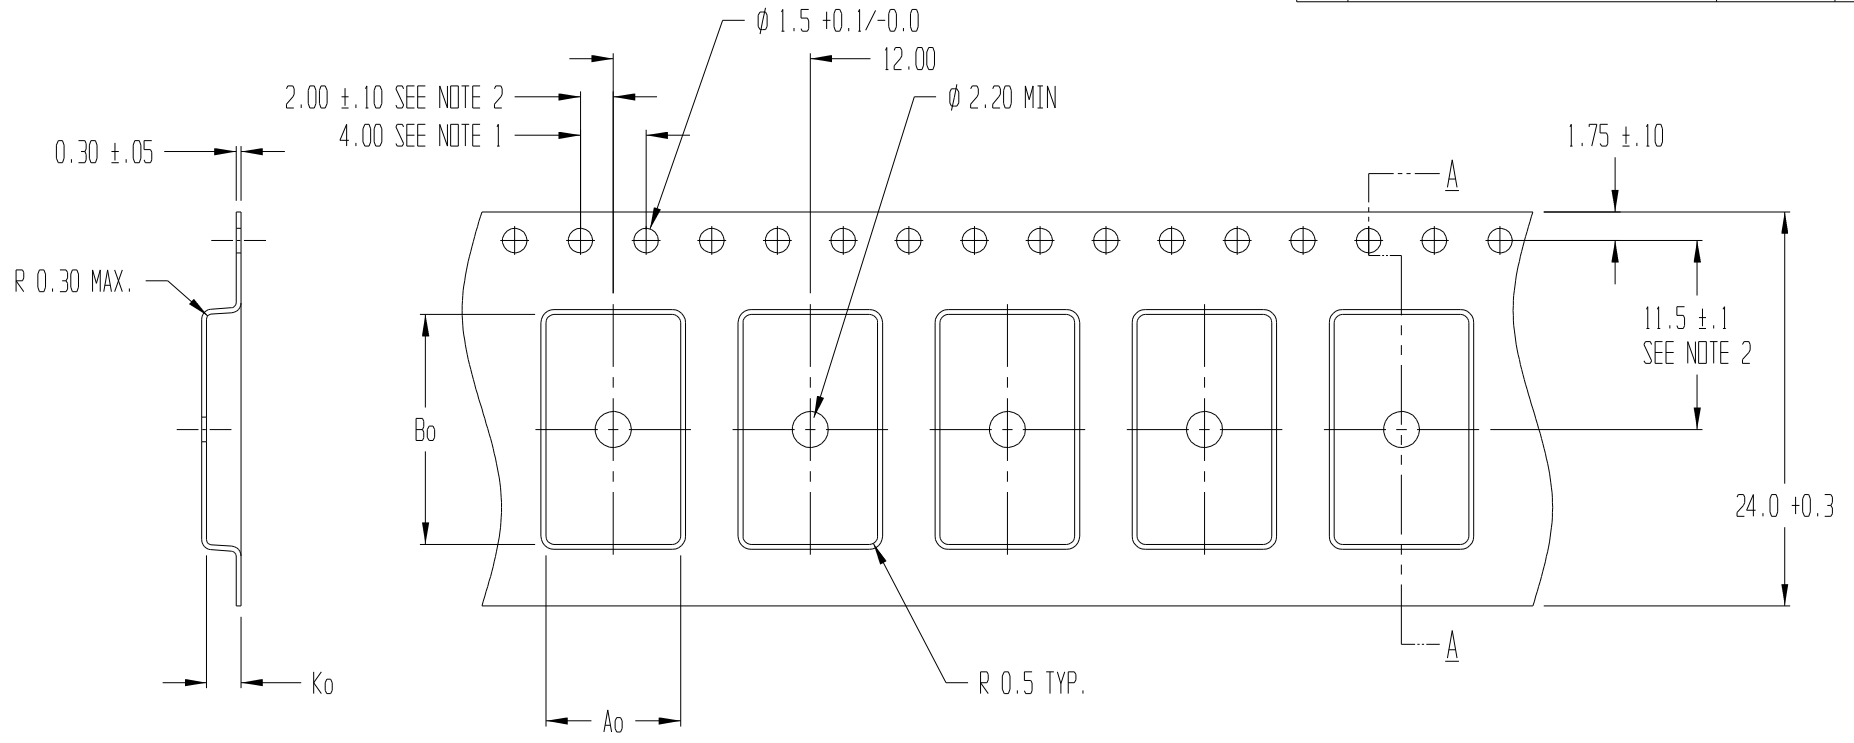

SECTION A - A

Ao = 8.20
Bo = 14.00
Ko = 2.10

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.2
2. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE
3. Ao AND Bo ARE CALCULATED ON A PLANE AT A DISTANCE "R" ABOVE THE BOTTOM OF THE POCKET.



ADVANTEK[®]
engineered confidence™

TITLE ADVANTEK PART DRAWING NUMBER SOMC20-A CARRIER TAPE			
TOLERANCES - UNLESS NOTED 1PL ± 0.2 2PL ± 0.10	MATERIAL PS+C	DWG SIZE B	
ALL DIMS IN MILLIMETERS PER ASME Y14.5M			
DRAWN BY BJD	DATE 12/10/1990	SCALE 3:1	SHEET 1 OF 1
CK'D BY	PROJECT NO. A1210-90-2/ 7417.00	DWG NO. A1210-90-2	REV 2