


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
2	WAS CUSTOM TOOL	8/31/11	BTH
3	RESTORED ORIGINAL WIDTH TOLERANCE	9/21/12	BTH

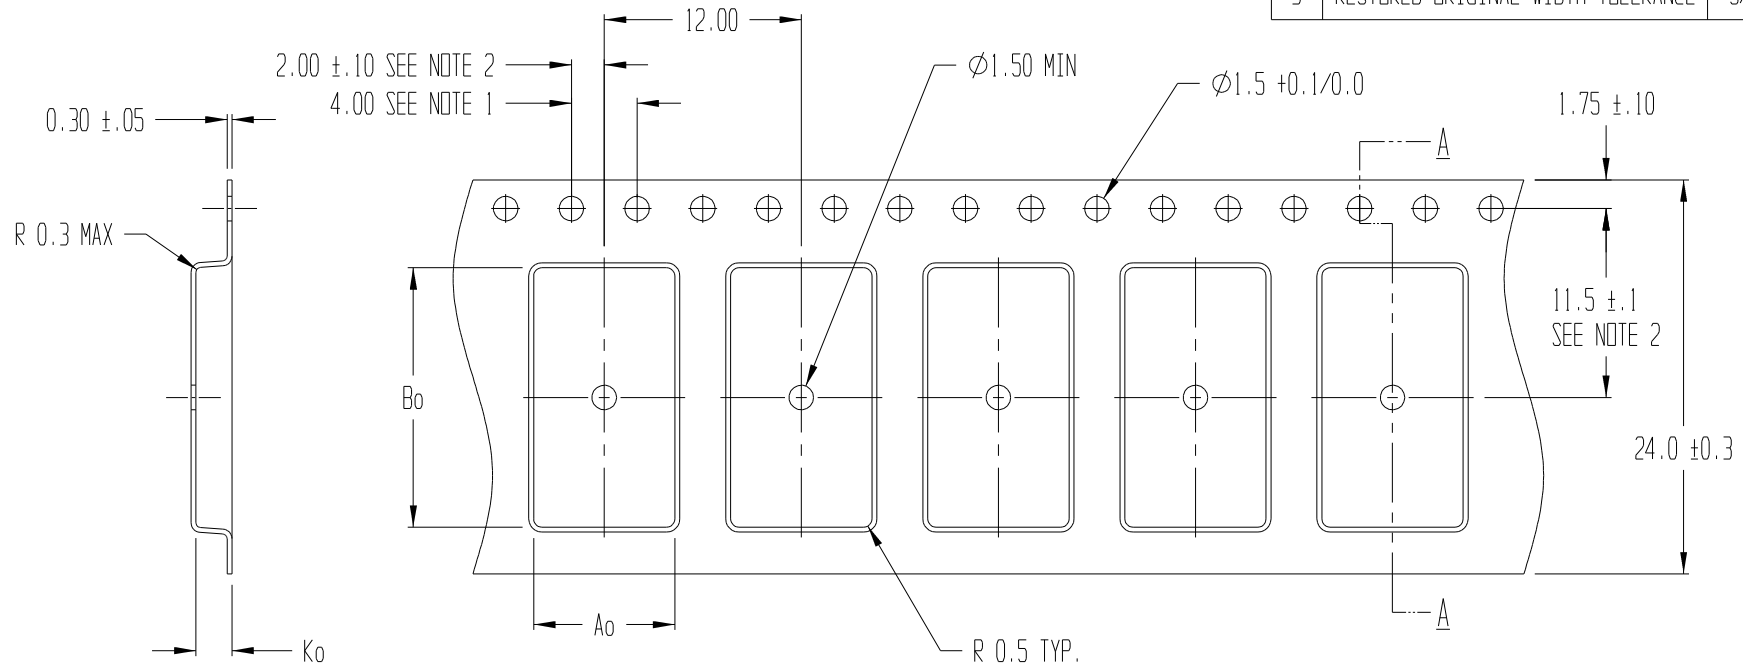

SECTION A - A

Ao = 8.6
Bo = 15.8
Ko = 2.2

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.2
2. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE
3. Ao AND Bo ARE CALCULATED ON A PLANE AT A DISTANCE "R" ABOVE THE BOTTOM OF THE POCKET.



TITLE ADVANTEK PART DRAWING NUMBER SOP-24-A CARRIER TAPE			
TOLERANCES - UNLESS NOTED 1PL ± 0.2 2PL ± 0.10	MATERIAL PS+C	DWG SIZE B	
ALL DIMS IN MILLIMETERS PER ASME Y14.5M			
DRAWN BY CKS/TMD	DATE 5/14/91	SCALE 3:1	SHEET 1 OF 1
CK'D BY	PROJECT NO. 7667.00	DWG NO. A0514-91-3	REV 3