



REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
2	WAS A CUSTOM TOOL	8/8/11	TMD

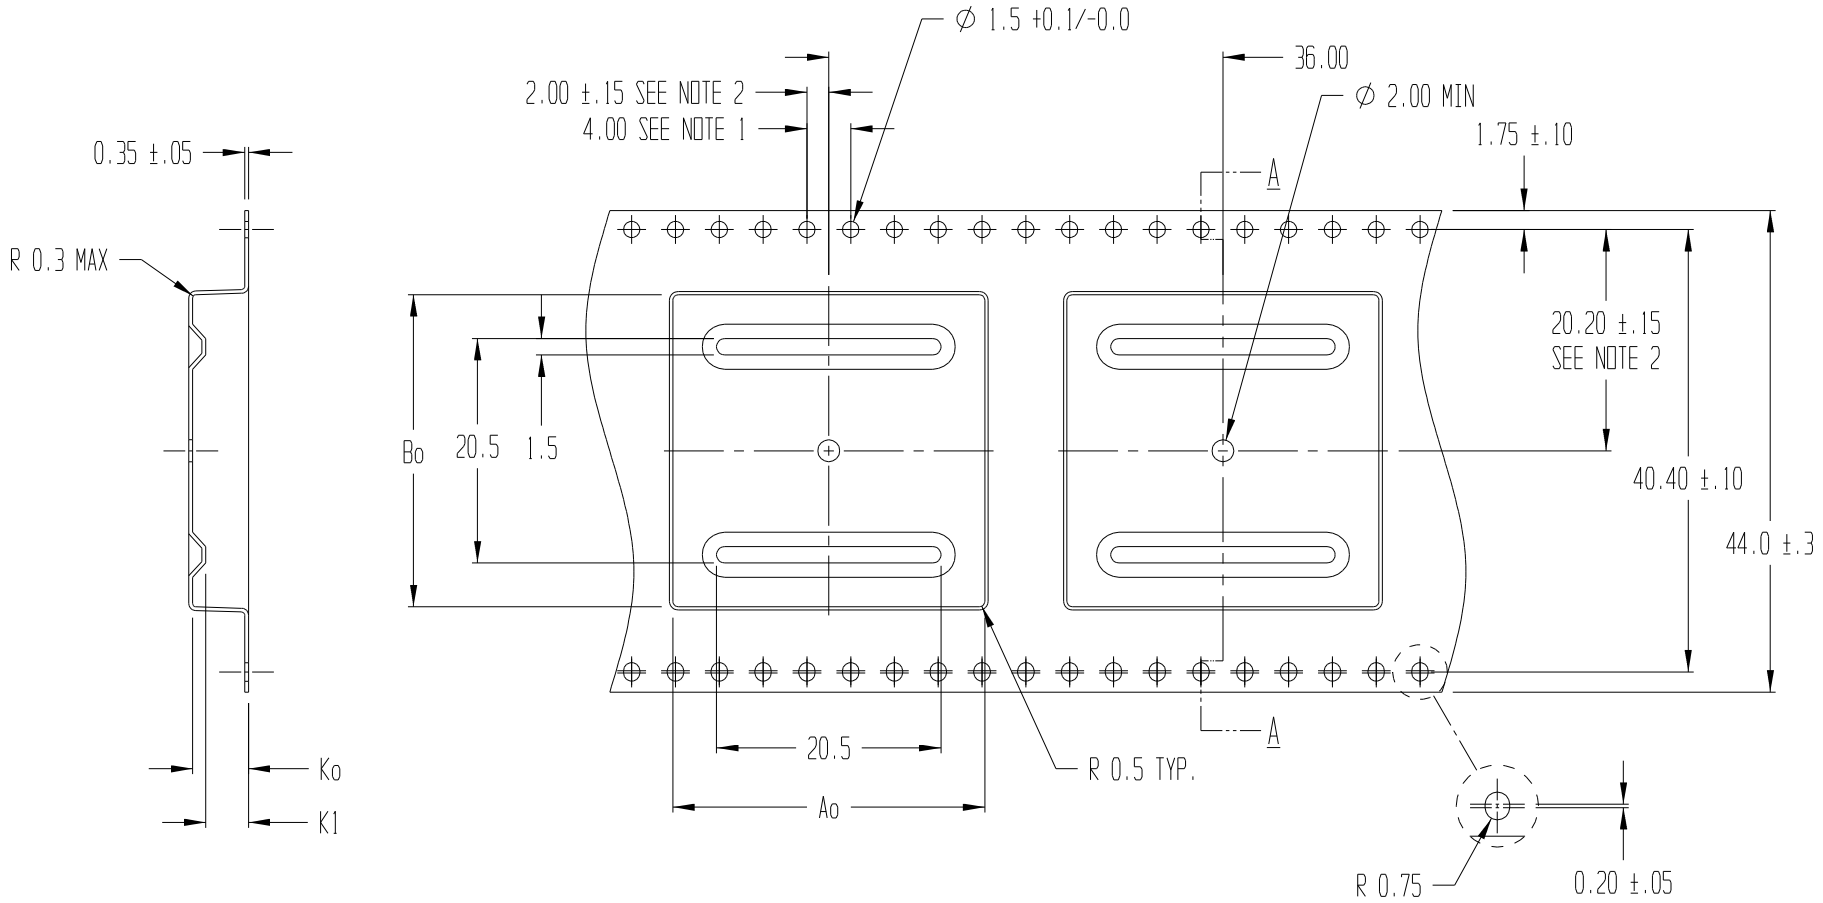

SECTION A - A

$A_0 = 28.5$
 $B_0 = 28.5$
 $K_0 = 5.1$
 $K_1 = 3.9$

- NOTES:
1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.2
 2. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE
 3. A_0 AND B_0 ARE CALCULATED ON A PLANE AT A DISTANCE "R" ABOVE THE BOTTOM OF THE POCKET.

 ADVANTEK [®] engineered confidence™			
TITLE ADVANTEK PART DRAWING NUMBER Q24X24-C CARRIER TAPE			
TOLERANCES - UNLESS NOTED 1PL ± 0.2 2PL ± 0.10	MATERIAL PS+C	DWG SIZE B	
ALL DIMS IN MILLIMETERS PER ASME Y14.5M			
DRAWN BY BTH	DATE 5/7/99	SCALE 2:1	SHEET 1 OF 1
CK'D BY	PROJECT NO. T-8716-A / 7667.00	DWG NO. T102224AT	REV 2