


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
1	WAS CUSTOM TOOL	1/28/2011	XHL

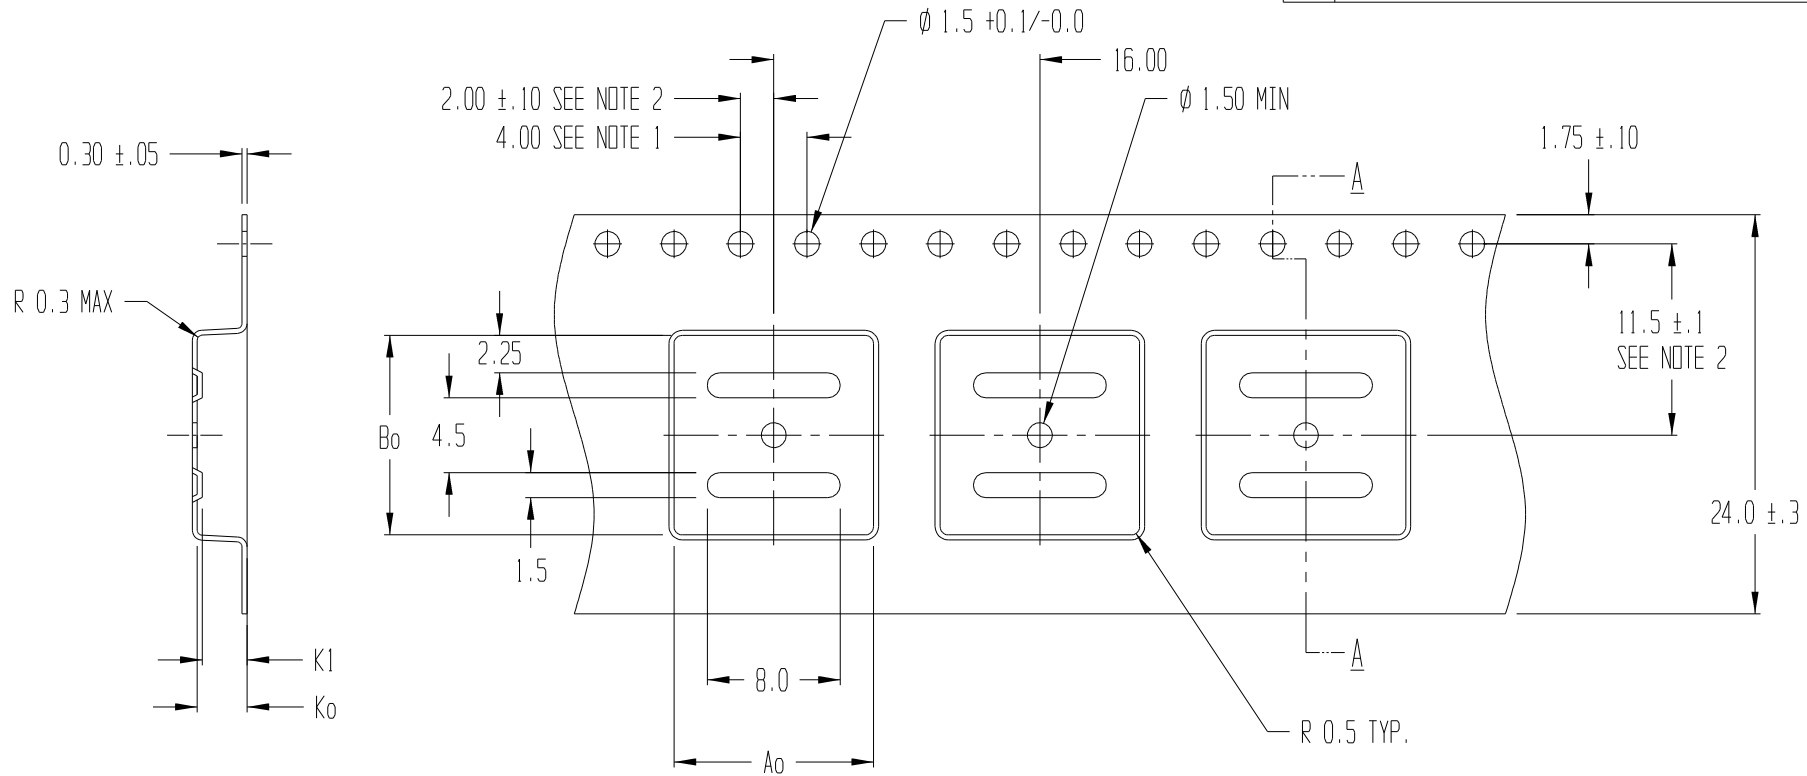

SECTION A - A

$A_o = 12.0$
 $B_o = 12.0$
 $K_o = 3.0$
 $K_1 = 2.7$

NOTES:

- 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.2
- POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE
- A_o AND B_o ARE CALCULATED ON A PLANE AT A DISTANCE "R" ABOVE THE BOTTOM OF THE POCKET.



TITLE ADVANTEK PART DRAWING NUMBER 28LCCM-A CARRIER TAPE			
TOLERANCES - UNLESS NOTED 1PL ± 0.2 2PL ± 0.10	MATERIAL PS+C	DWG SIZE B	
ALL DIMS IN MILLIMETERS PER ASME Y14.5M			
DRAWN BY BVB	DATE 10/3/97	SCALE 3:1	SHEET 1 OF 1
CK'D BY	PROJECT NO. T-7066-A/7667.00	DWG NO. T100385AT	REV 2