


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
1	WAS CLOSED TOOL	2/21/11	TMO

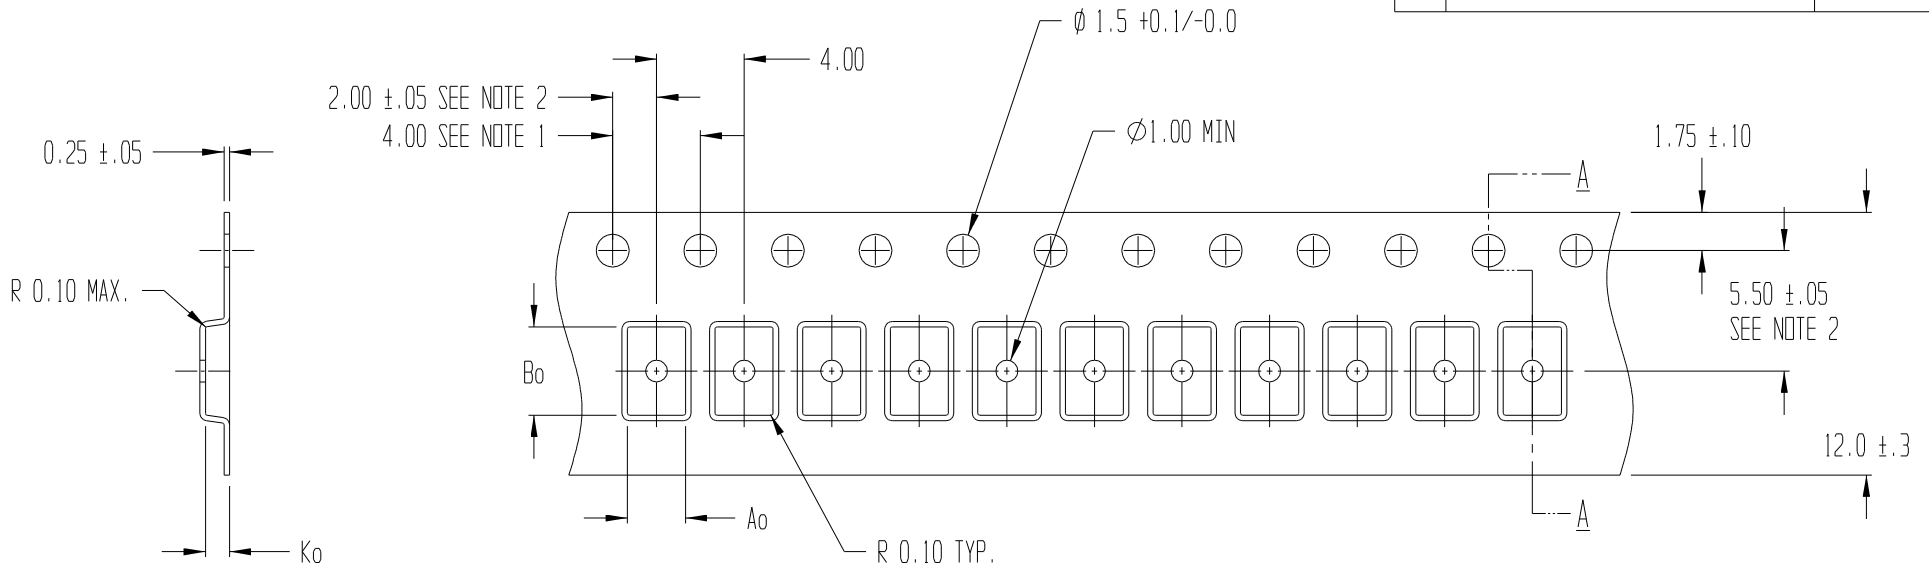

SECTION A - A

$A_o = 2.65 \pm 0.05$   
 $B_o = 4.03 \pm 0.05$   
 $K_o = 1.10 \pm 0.05$

NOTES:

- 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE  $\pm 0.2$
- POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE
- $A_o$  AND  $B_o$  ARE CALCULATED ON A PLANE AT A DISTANCE "R" ABOVE THE BOTTOM OF THE POCKET.



**ADVANTEK**<sup>®</sup>  
engineered confidence™

TITLE ADVANTEK PART DRAWING NUMBER BBB002-A CARRIER TAPE			
TOLERANCES - UNLESS NOTED 1PL $\pm 0.2$ 2PL $\pm 0.10$	MATERIAL PC	DWG SIZE B	
ALL DIMS IN MILLIMETERS PER ASME Y14.5M			
DRAWN BY NCE	DATE 11/11/2005	SCALE 4:1	SHEET 1 OF 1
CK'D BY	PROJECT NO. 281.01 / 7666.00	DWG NO. T105309BT	REV 1