


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
1	WAS CLOSED TOOL	2/18/11	TMD

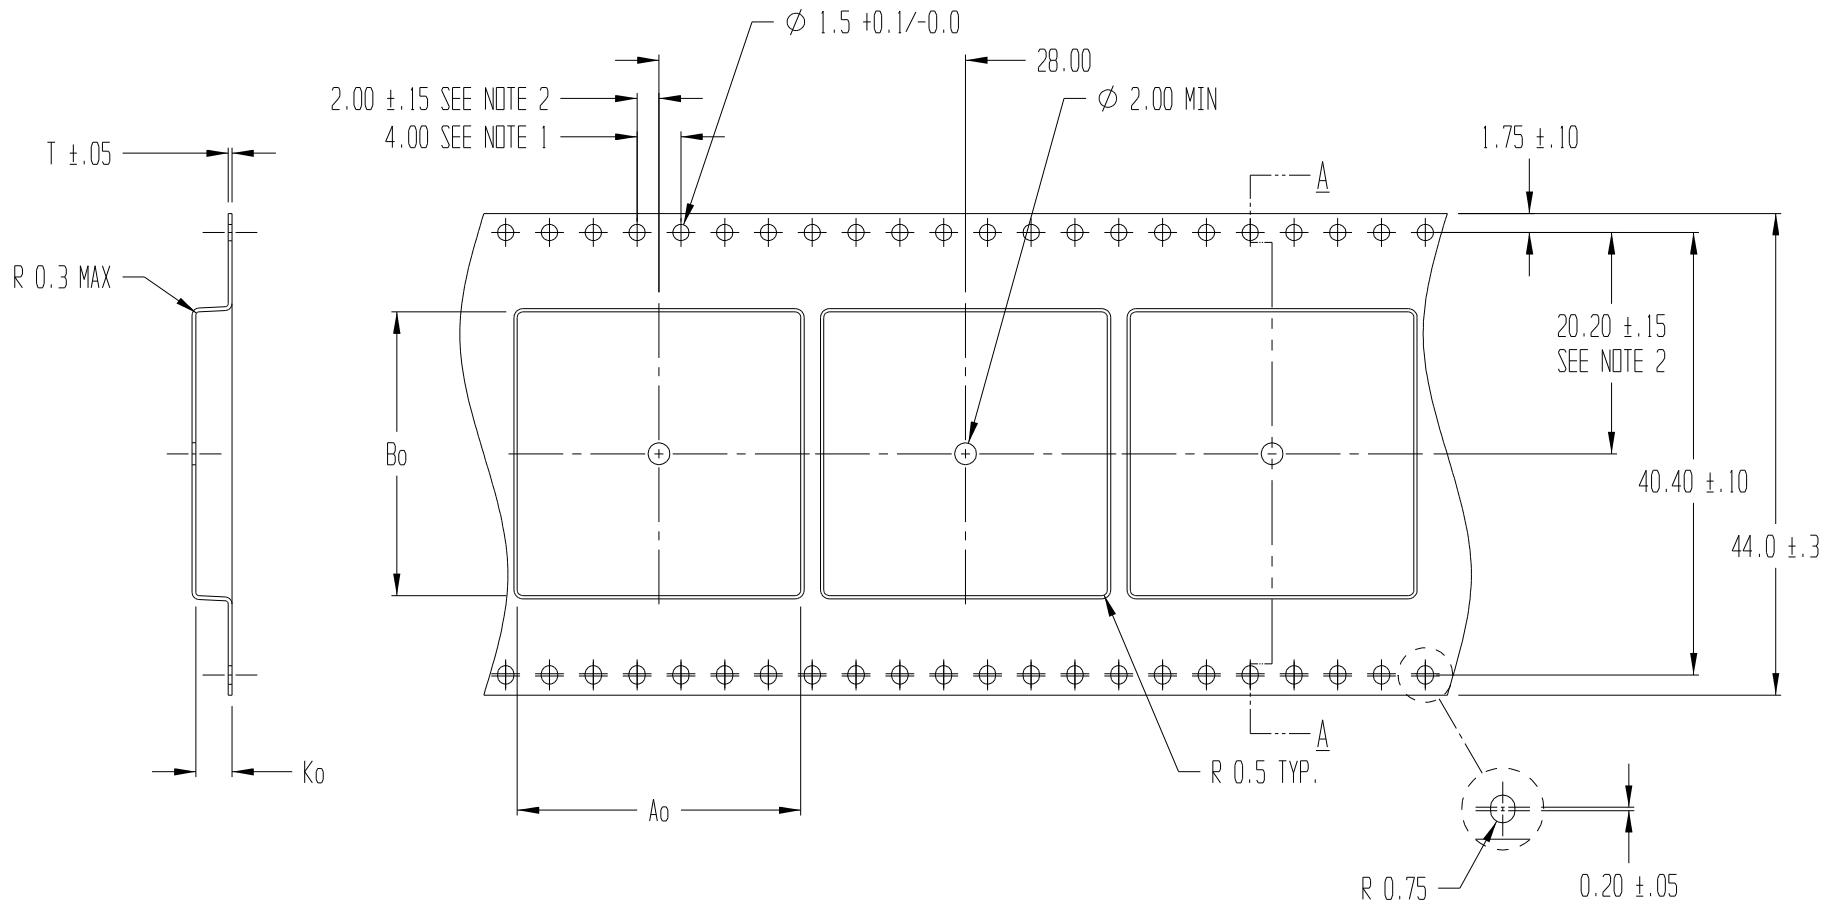

SECTION A - A

Ao = 25.9
Bo = 25.9
Ko = 3.3

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.2
2. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE
3. Ao AND Bo ARE CALCULATED ON A PLANE AT A DISTANCE "R" ABOVE THE BOTTOM OF THE POCKET.

PART #	T	MATERIAL	DRAWING #
ANA028-AX	.35	PS+C	T103511BT
ANA028-AC	.30	PS+C	T103517BT



ADVANTEK[®]
engineered confidence™

TITLE ADVANTEK PART DRAWING NUMBER ANA028-A CARRIER TAPE			
TOLERANCES - UNLESS NOTED 1PL ± 0.2 2PL ± 0.10	MATERIAL SEE TABLE	DWG SIZE B	
ALL DIMS IN MILLIMETERS PER ASME Y14.5M			
DRAWN BY BTH	DATE 12/03/2001	SCALE 2:1	SHEET 1 OF 1
CK'D BY	PROJECT NO. T-11414-B / 7666.00	DWG NO. SEE TABLE	REV 1