


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
1	WAS CUSTOM TOOL	7/28/2011	XHL



- NOTES:
1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.2
 2. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE
 3. A_o AND B_o ARE CALCULATED ON A PLANE AT A DISTANCE "R" ABOVE THE BOTTOM OF THE POCKET.

$A_o = 12.50$
 $B_o = 16.30$
 $K_o = 3.30$
 $K_1 = 2.45$

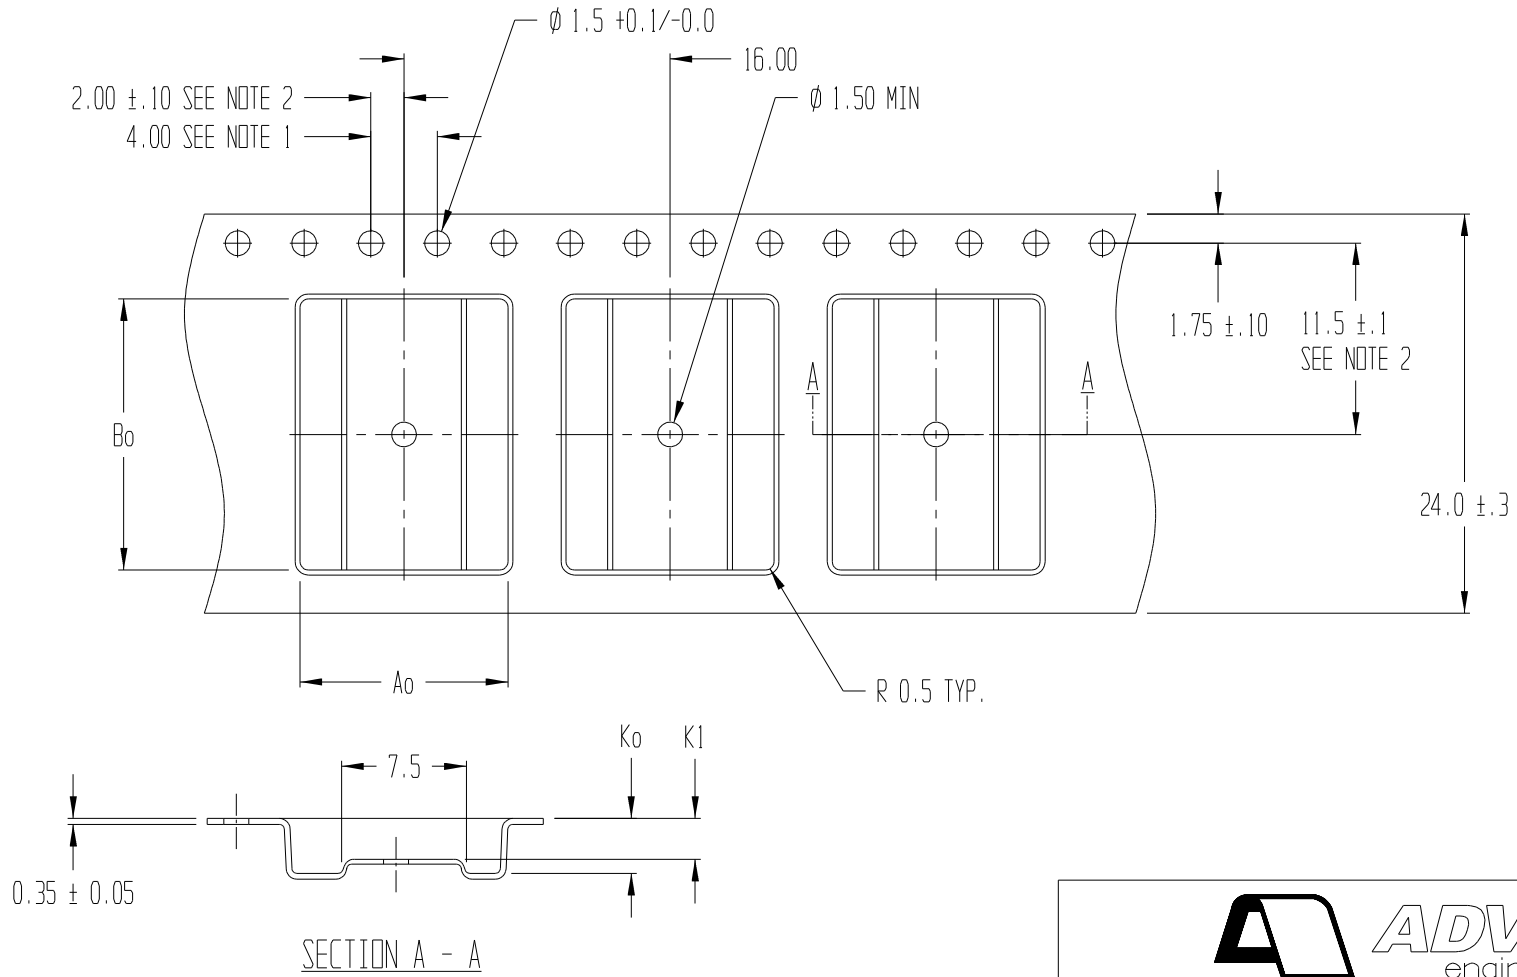

ADVANTEK engineered confidence™			
TITLE ADVANTEK PART DRAWING NUMBER 40-VSD-G CARRIER TAPE			
TOLERANCES - UNLESS	MATERIAL PS+C	DWG SIZE B	
NOTED 1PL ± 0.2 2PL ± 0.10	ALL DIMS IN MILLIMETERS PER ASME Y14.5M		
DRAWN BY BJD/BVB	DATE 1/8/91	SCALE 3:1	SHEET 1 OF 1
CK'D BY	PROJECT NO. /7667.00	DWG NO. A0108-91-1	REV 5