


| REVISIONS | | | |
|-----------|-----------------|---------|----------|
| REV | DESCRIPTION | DATE | APPROVED |
| 1 | WAS CLOSED TOOL | 6/13/11 | BTH |

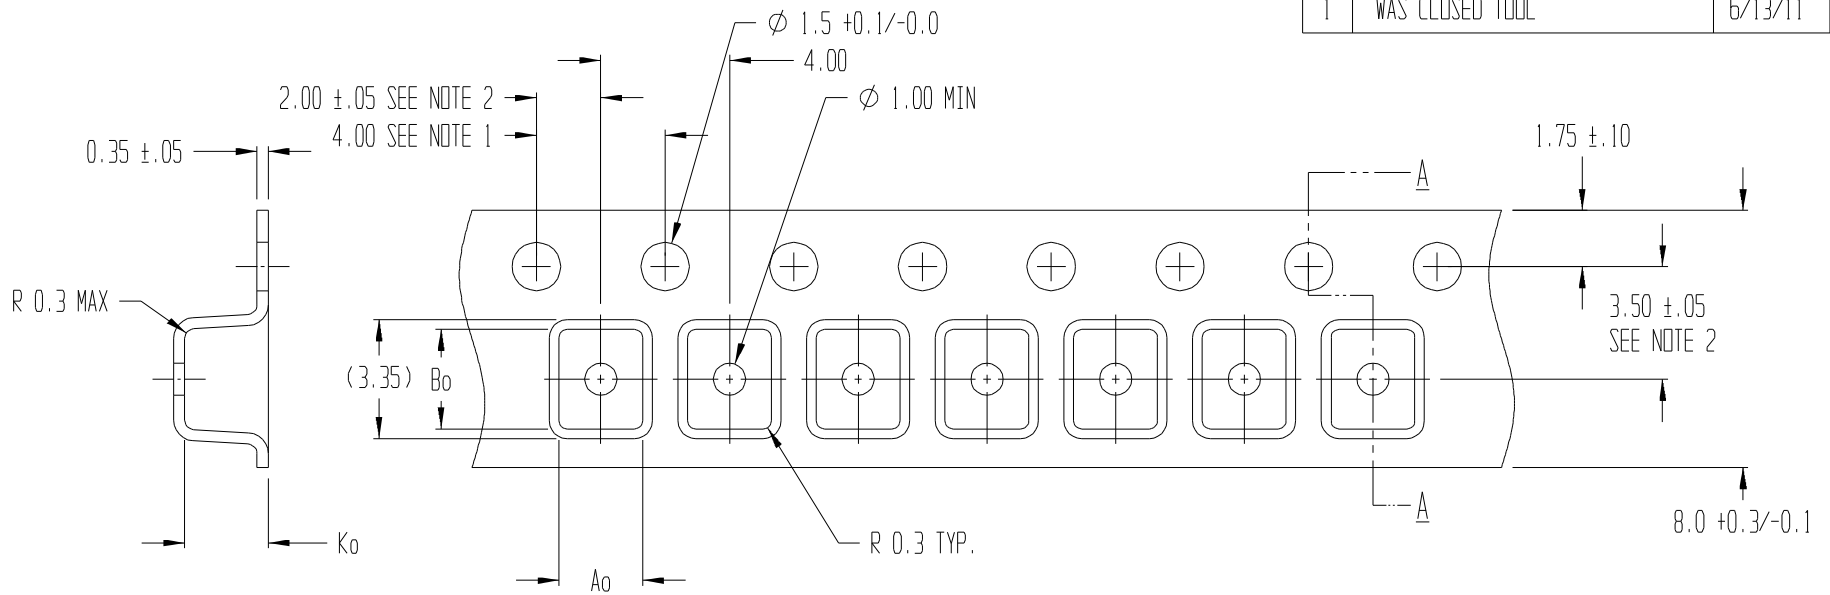

SECTION A - A

$A_0 = 2.60$
 $B_0 = 3.10$
 $K_0 = 2.60$

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.2
2. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE
3. A_0 AND B_0 ARE CALCULATED ON A PLANE AT A DISTANCE "R" ABOVE THE BOTTOM OF THE POCKET.



ADVANTEK[®]
engineered confidence™

| | | | |
|---|--|-----------------------------|-------------------|
| TITLE ADVANTEK PART DRAWING NUMBER LISMC2-A CARRIER TAPE | | | |
| TOLERANCES - UNLESS NOTED 1PL ± 0.2 2PL ± 0.10 | | MATERIAL PS+C | DWG SIZE B |
| ALL DIMS IN MILLIMETERS PER ASME Y14.5M | | | |
| DRAWN BY RJB | | DATE 1/4/00 | SCALE 6:1 |
| CK'D BY | | PROJECT NO. T-9491/ 7417.00 | DWG NO. T102670BT |
| | | | SHEET 1 OF 1 |
| | | | REV 1 |