



REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
2	WAS CUSTOM TOOL	7/29/11	BTH
3	RESTORED ORIGINAL WIDTH TOLERANCE	3/1/12	BTH

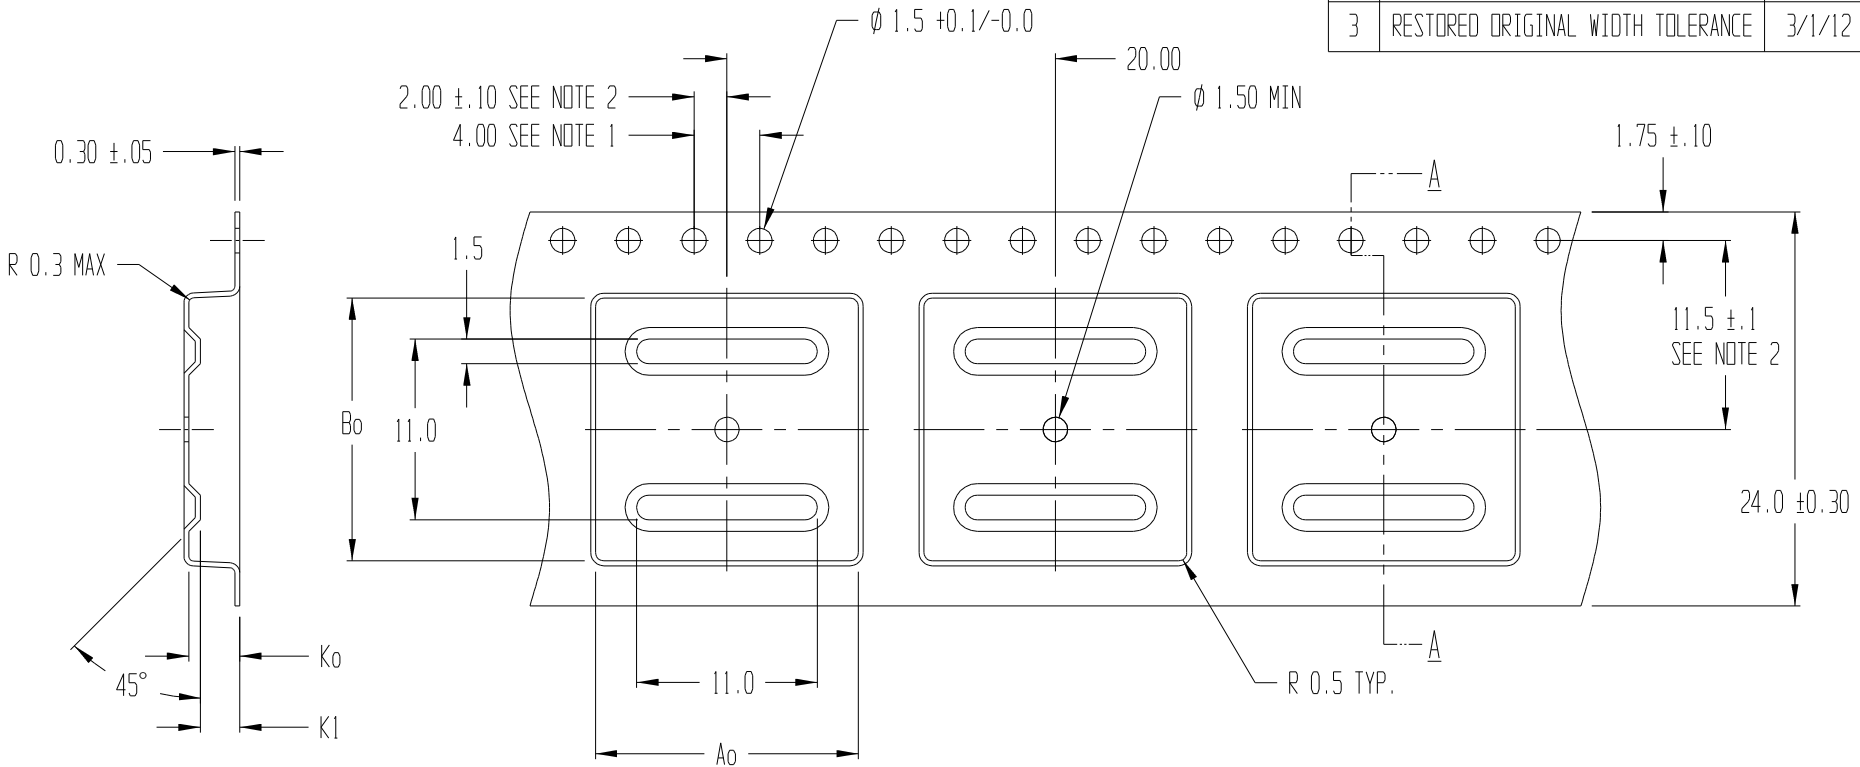

SECTION A - A

$A_0 = 16.00$
 $B_0 = 16.00$
 $K_0 = 3.10$
 $K_1 = 2.40$

- NOTES:
1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.2
 2. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE
 3. A_0 AND B_0 ARE CALCULATED ON A PLANE AT A DISTANCE "R" ABOVE THE BOTTOM OF THE POCKET.

 ADVANTEK [®] engineered confidence™			
TITLE ADVANTEK PART DRAWING NUMBER Q12X12-L CARRIER TAPE			
TOLERANCES - UNLESS NOTED 1PL ± 0.2 2PL ± 0.10	MATERIAL PS+C	DWG SIZE B	
ALL DIMS IN MILLIMETERS PER ASME Y14.5M			
DRAWN BY RJB/BVB	DATE 6/22/94	SCALE 3:1	SHEET 1 OF 1
CK'D BY	PROJECT NO. 7667.00	DWG NO. A0719-94-3	REV 3