REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
1	WAS CLOSE TOOL	1/28/2011	XHL

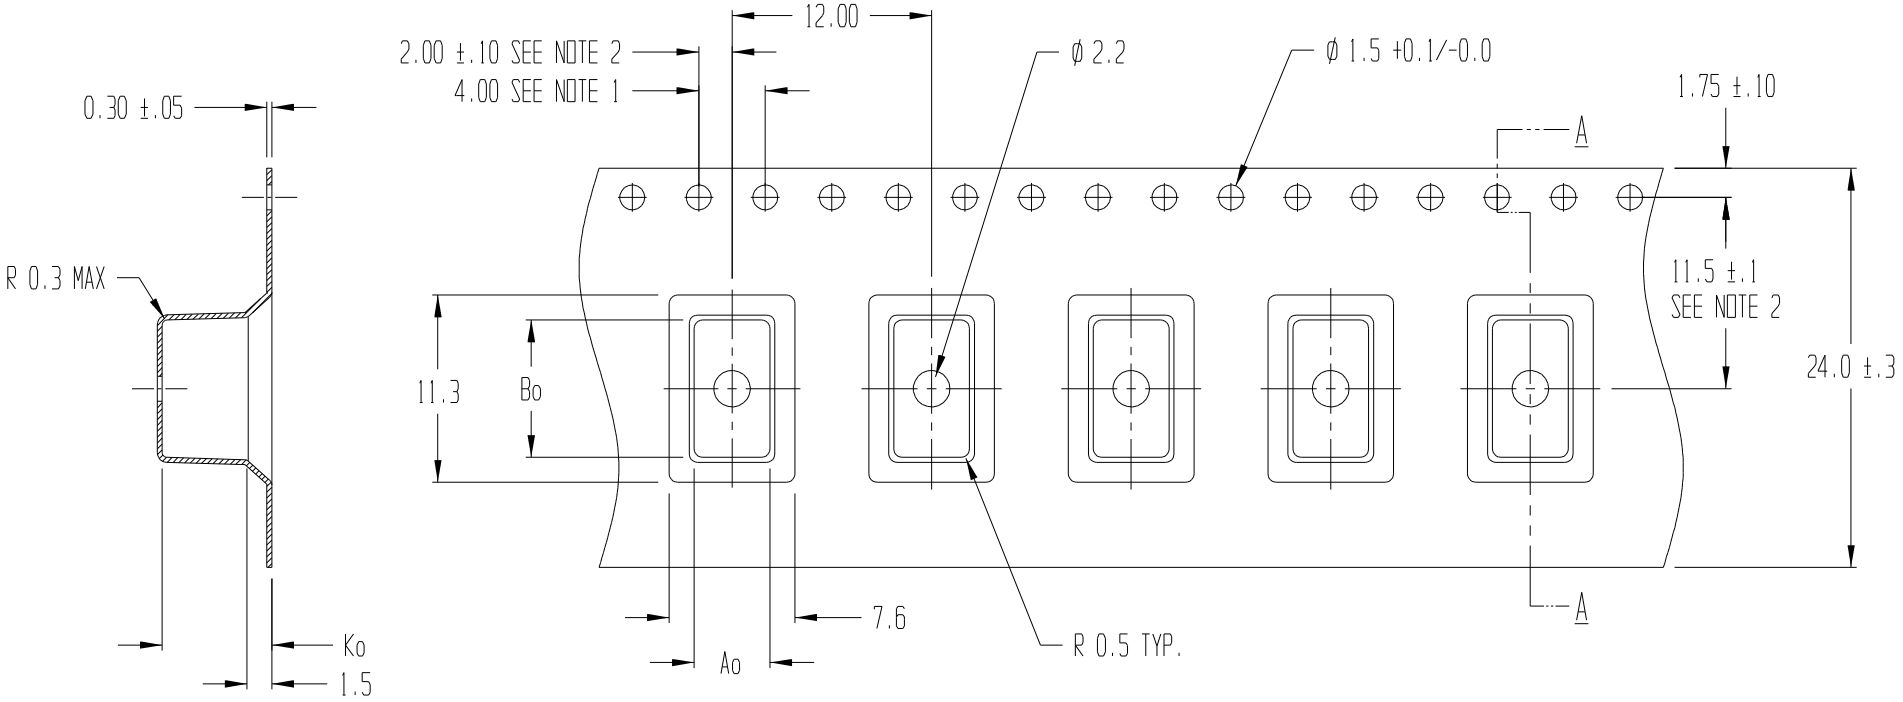

SECTION A - A

Ao = 4.60
Bo = 8.20
Ko = 6.60

NOTES:
1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ±0.2
2. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE
3. Ao AND Bo ARE CALCULATED ON A PLANE AT A DISTANCE "R" ABOVE THE BOTTOM OF THE POCKET.

ADVANTEK® engineered confidence™

TITLE	ADVANTEK PART DRAWING NUMBER 82MMPX-A CARRIER TAPE		
TOLERANCES - UNLESS NOTED 1PL ±.2 2PL ±.10	MATERIAL PS+C		DWG SIZE B
	ALL DIMS IN MILLIMETERS PER ASME Y14.5M		
DRAWN BY TMD	DATE 04/29/2004	SCALE 3:1	SHEET 1 OF 1
CK'D BY	PROJECT NO. T-12853-A/7666.00	DWG NO. T104698BT	REV 1