


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

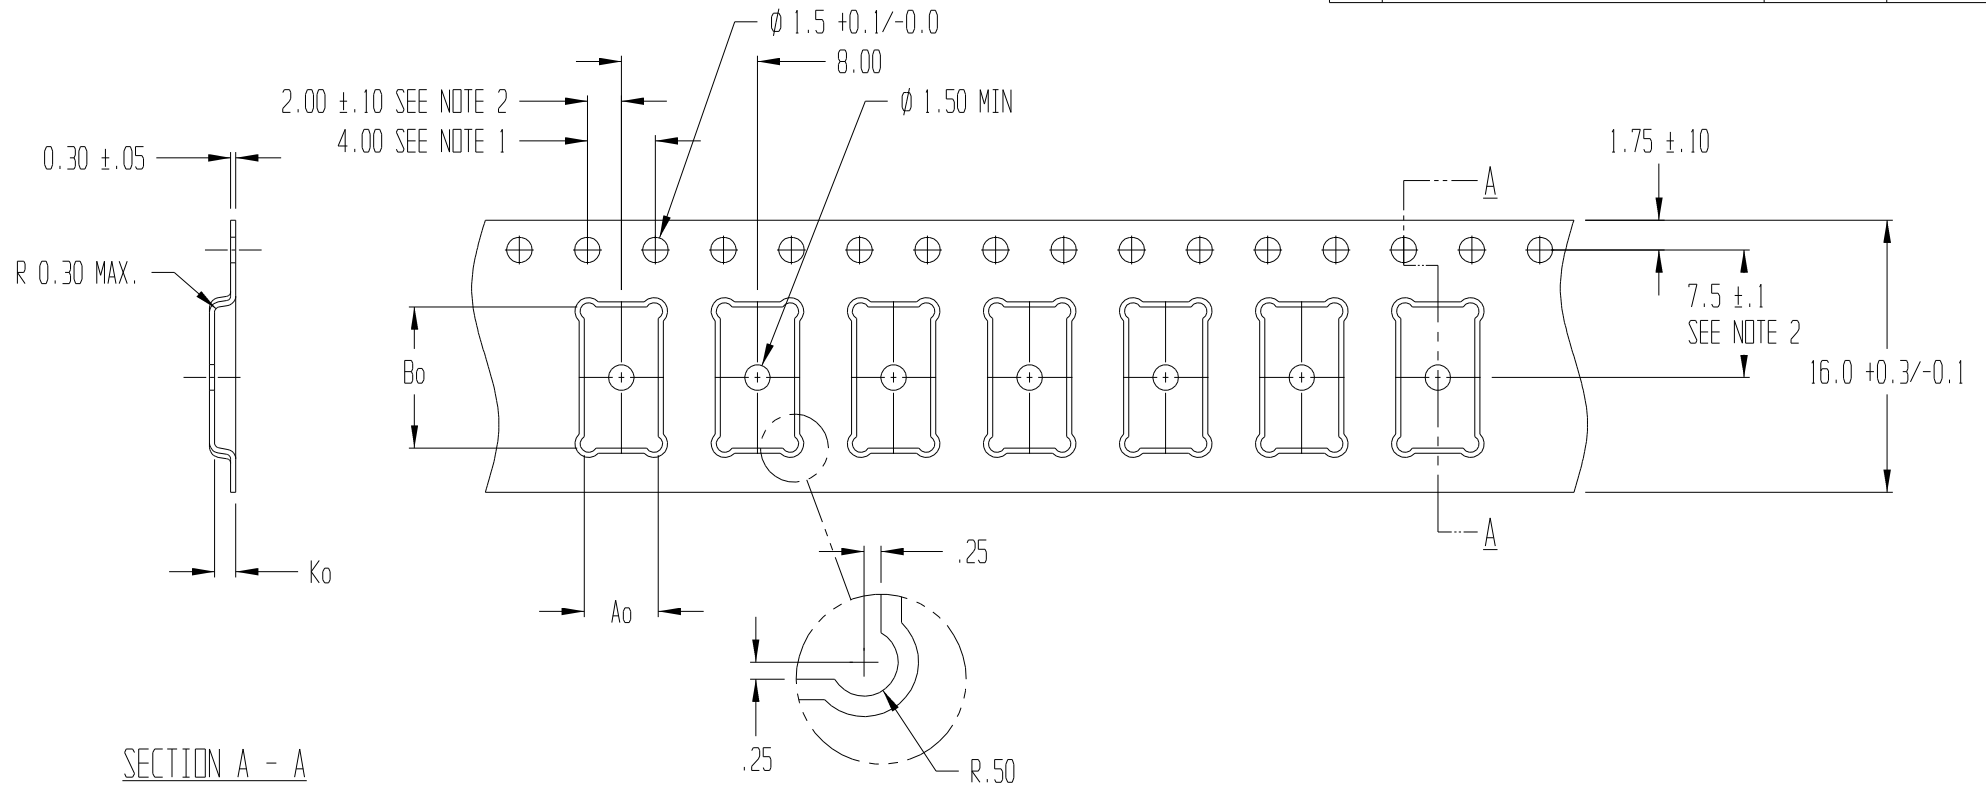

SECTION A - A

$A_0 = 4.35$
 $B_0 = 8.30$
 $K_0 = 1.25$

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.2
2. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE
3. A_0 AND B_0 ARE CALCULATED ON A PLANE AT A DISTANCE "R" ABOVE THE BOTTOM OF THE POCKET.



TITLE ADVANTEK PART DRAWING NUMBER CCA092-A CARRIER TAPE			
TOLERANCES - UNLESS NOTED 1PL $\pm .2$ 2PL $\pm .10$	MATERIAL PC TRI-LAM	DWG SIZE B	
ALL DIMS IN MILLIMETERS PER ASME Y14.5M			
DRAWN BY JH	DATE 05/31/2013	SCALE 3:1	SHEET 1 OF 1
CK'D BY	PROJECT NO. 11222.01	DWG NO. T110553BT	REV