


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
3	ADDED TABLE	6/16/11	TMD

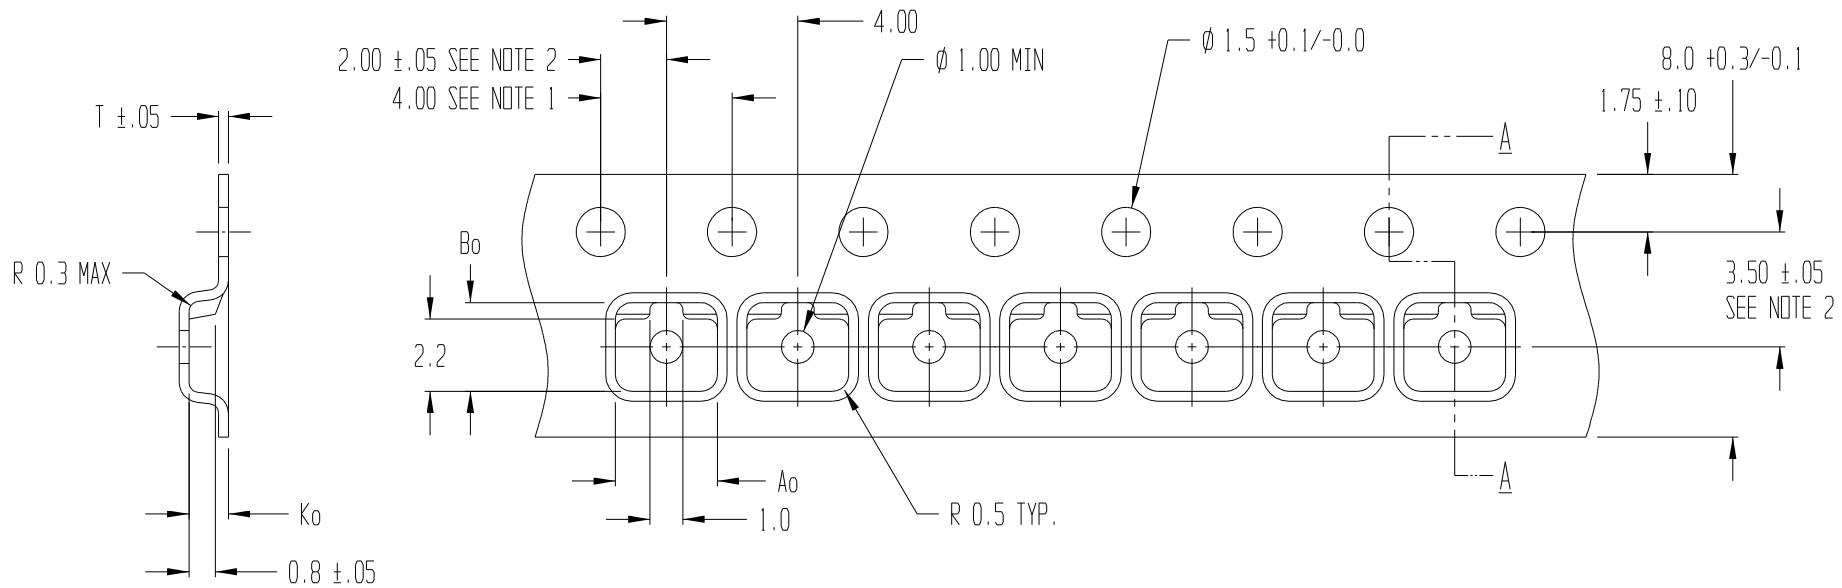

SECTION A - A

Ao = 3.10  
Bo = 2.70  
Ko = 1.20

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE  $\pm 0.2$
2. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE
3. Ao AND Bo ARE CALCULATED ON A PLANE AT A DISTANCE "R" ABOVE THE BOTTOM OF THE POCKET.

PART#	T	MATERIAL	DRAWING NO.
SOT-23-AG	0.25	PC	T107679BT
SOT-23-ABB	0.25	PC	T108964BT
SOT-23-AC	0.30	PS+C	A0820-90-2



**ADVANTEK**<sup>®</sup>  
engineered confidence™

TITLE ADVANTEK PART DRAWING NUMBER SOT-23-A CARRIER TAPE			
TOLERANCES - UNLESS NOTED 1PL $\pm 0.2$ 2PL $\pm 0.10$	MATERIAL SEE TABLE	DWG SIZE B	
ALL DIMS IN MILLIMETERS PER ASME Y14.5M			
DRAWN BY BTH	DATE 06/16/2009	SCALE 6:1	SHEET 1 OF 1
CK'D BY	PROJECT NO.	DWG NO. SEE TABLE	REV 3