


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
2	WAS CLOSED TOOL	2/21/11	TMO



$A_o = 1.74 \pm 0.05$
 $B_o = 1.74 \pm 0.05$
 $K_o = 0.75 \pm 0.05$

- NOTES:
- 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.2
 - POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE
 - A_o AND B_o ARE CALCULATED ON A PLANE AT A DISTANCE "R" ABOVE THE BOTTOM OF THE POCKET.

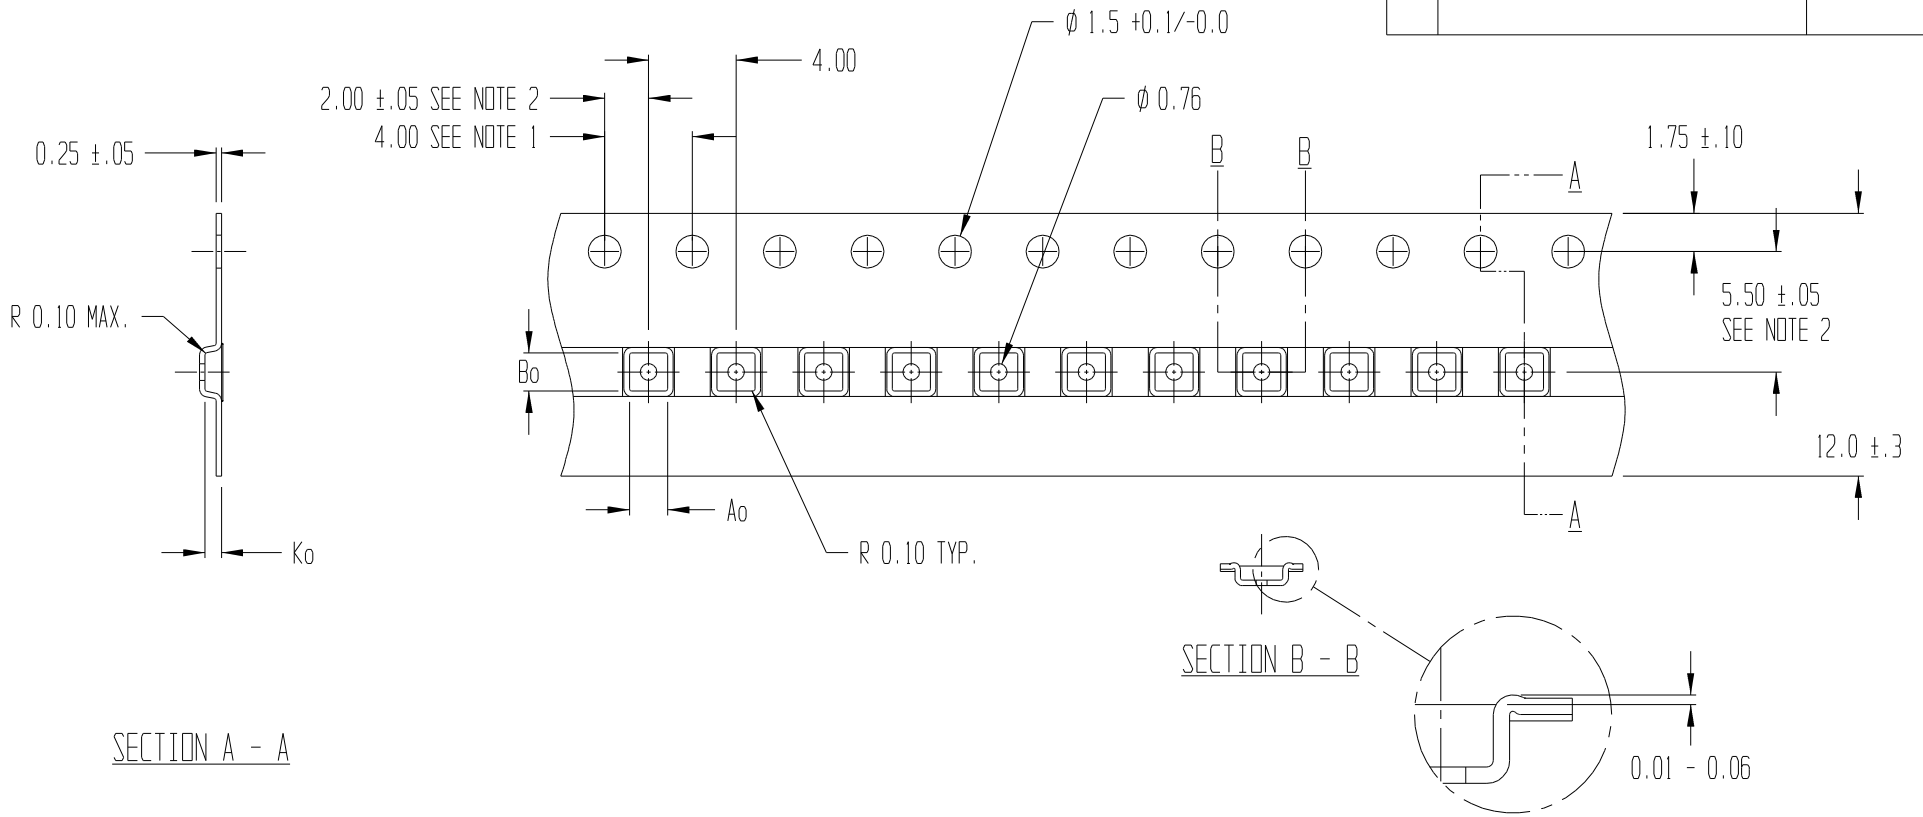

TITLE ADVANTEK PART DRAWING NUMBER BBB007-A CARRIER TAPE			
TOLERANCES - UNLESS NOTED 1PL ± 0.2 2PL ± 0.10	MATERIAL PC	DWG SIZE B	
ALL DIMS IN MILLIMETERS PER ASME Y14.5M			
DRAWN BY NCE	DATE 04/29/2006	SCALE 4:1	SHEET 1 OF 1
CK'D BY	PROJECT NO. 1433.00 / 7666.00	DWG NO. T1055888T	REV 2