


| REVISIONS | | | |
|-----------|--|--------|----------|
| REV | DESCRIPTION | DATE | APPROVED |
| 1 | Ao was 16.0; chamfer was 0.3x0.5; was -B | 8/8/97 | BTH |
| 2 | Drawing format change | 6/4/03 | BVB |

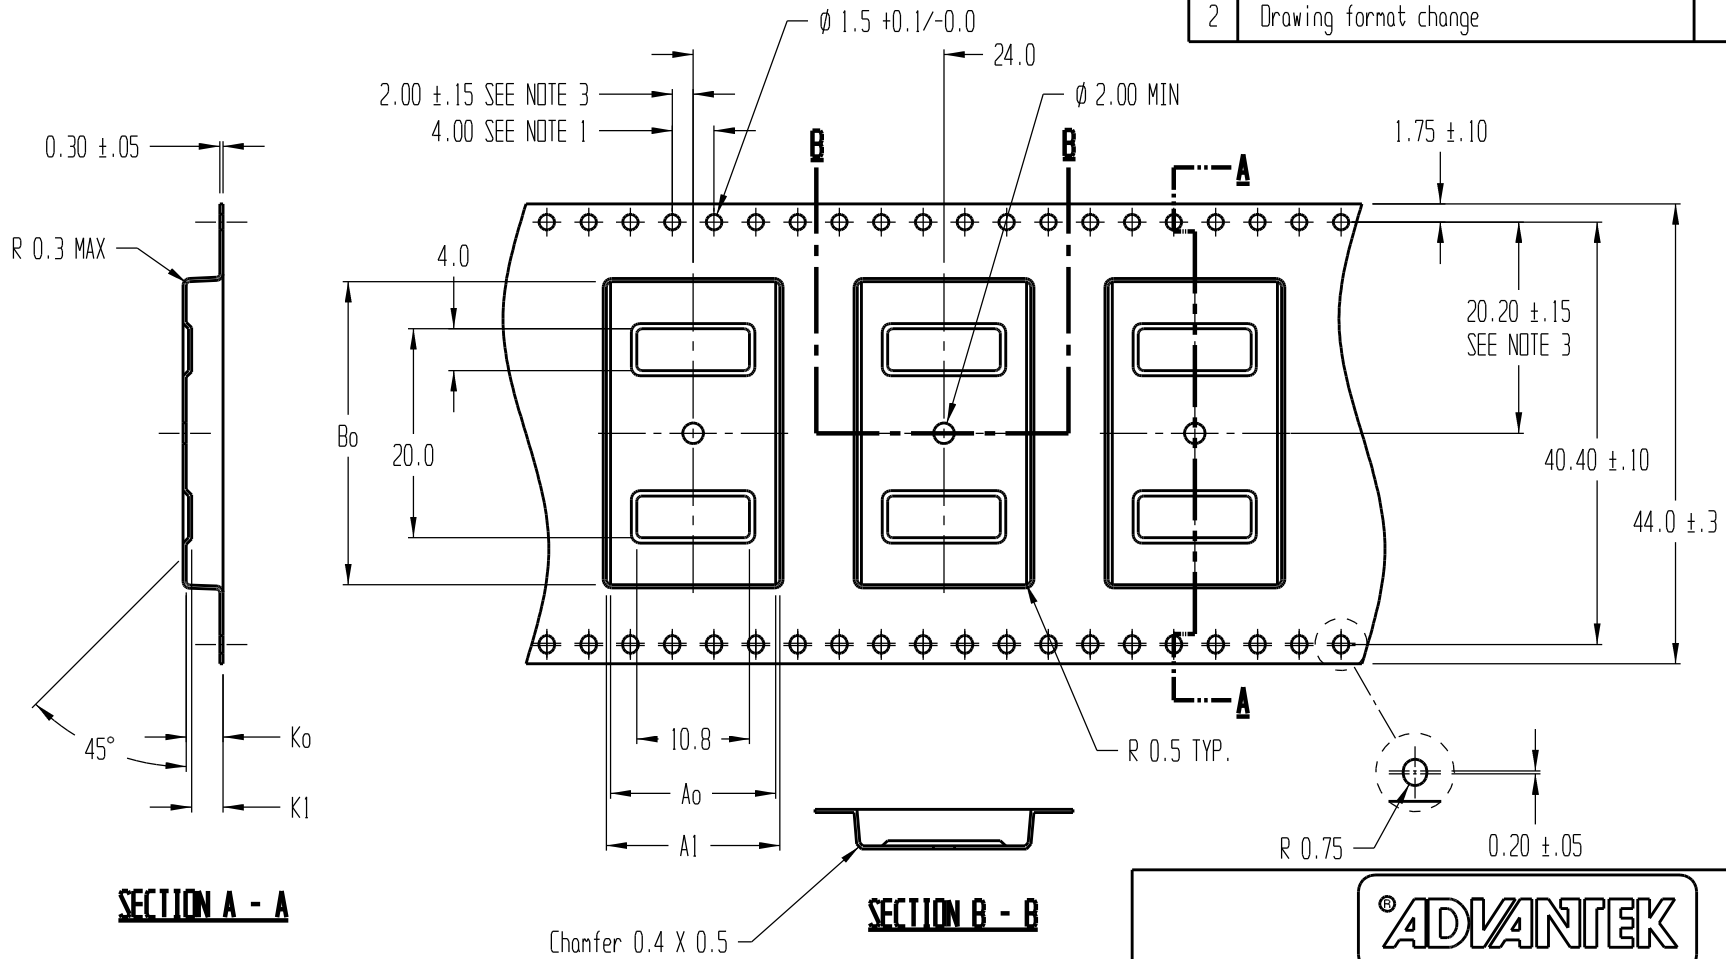

- NOTES:
1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.2
 2. CAMBER IN COMPLIANCE WITH EIA 481
 3. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE

- ① Ao = 15.80
 A1 = 16.60
 Bo = 29.00
 Ko = 3.50
 K1 = 3.00

| | | | |
|--|--------------------|-------------------------------|--------------|
| ADVANTEK | | | |
| TITLE ADVANTEK PART DRAWING NUMBER SD-44L-C ① | | | |
| TOLERANCES - UNLESS NOTED 1PL ± 0.2 2PL ± 0.10 | | MATERIAL PS+C | |
| | | ALL DIMENSIONS IN MILLIMETERS | DWG SIZE B |
| DRAWN BY RJB/BVB | DATE 5/22/97 | SCALE 2:1 | SHEET 1 OF 1 |
| REFERENCE NO. | DWG NO. A0527-97-1 | REV 2 | |