REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

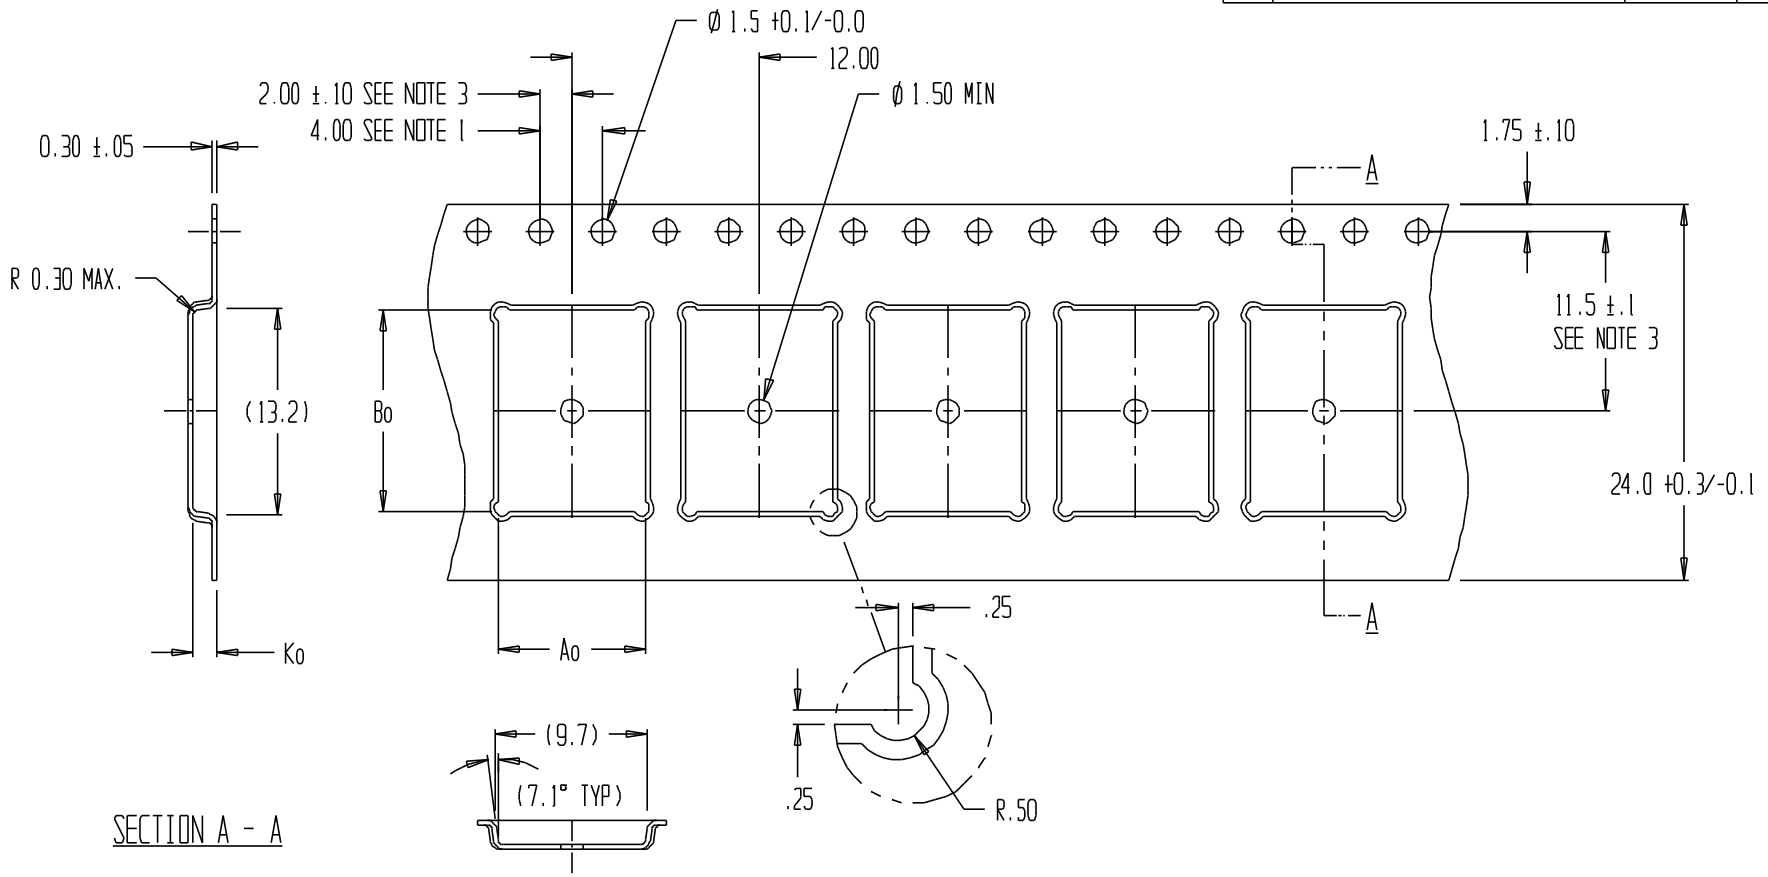

NOTES:
1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ±0.2
2. CAMBER IN COMPLIANCE WITH EIA 481
3. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE
4. Ao AND Bo ARE CACULATED ON A PLANE AT A DISTANCE "R" ABOVE THE BOTTOM OF THE POCKET.

Ao = 9.40
Bo = 12.90
Ko = 1.50

ADVANTEK®
engineered confidence™

TITLE	ADVANTEK PART DRAWING NUMBER 9X12.5-A CARRIER TAPE		
TOLERANCES - UNLESS NOTED 1PL ±.2 2PL ±.10	MATERIAL PS+C		DWG SIZE B
	ALL DIMS IN MILLIMETERS PER ASME Y14.5M		
DRAWN BY BTH	DATE 12/02/2009	SCALE 3:1	SHEET 1 OF 1
CK'D BY TMD	PROJECT NO. 6207.00	DWG NO. T107988BT	REV