REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
1	WAS CLOSED TOOL	2/16/11	BTH

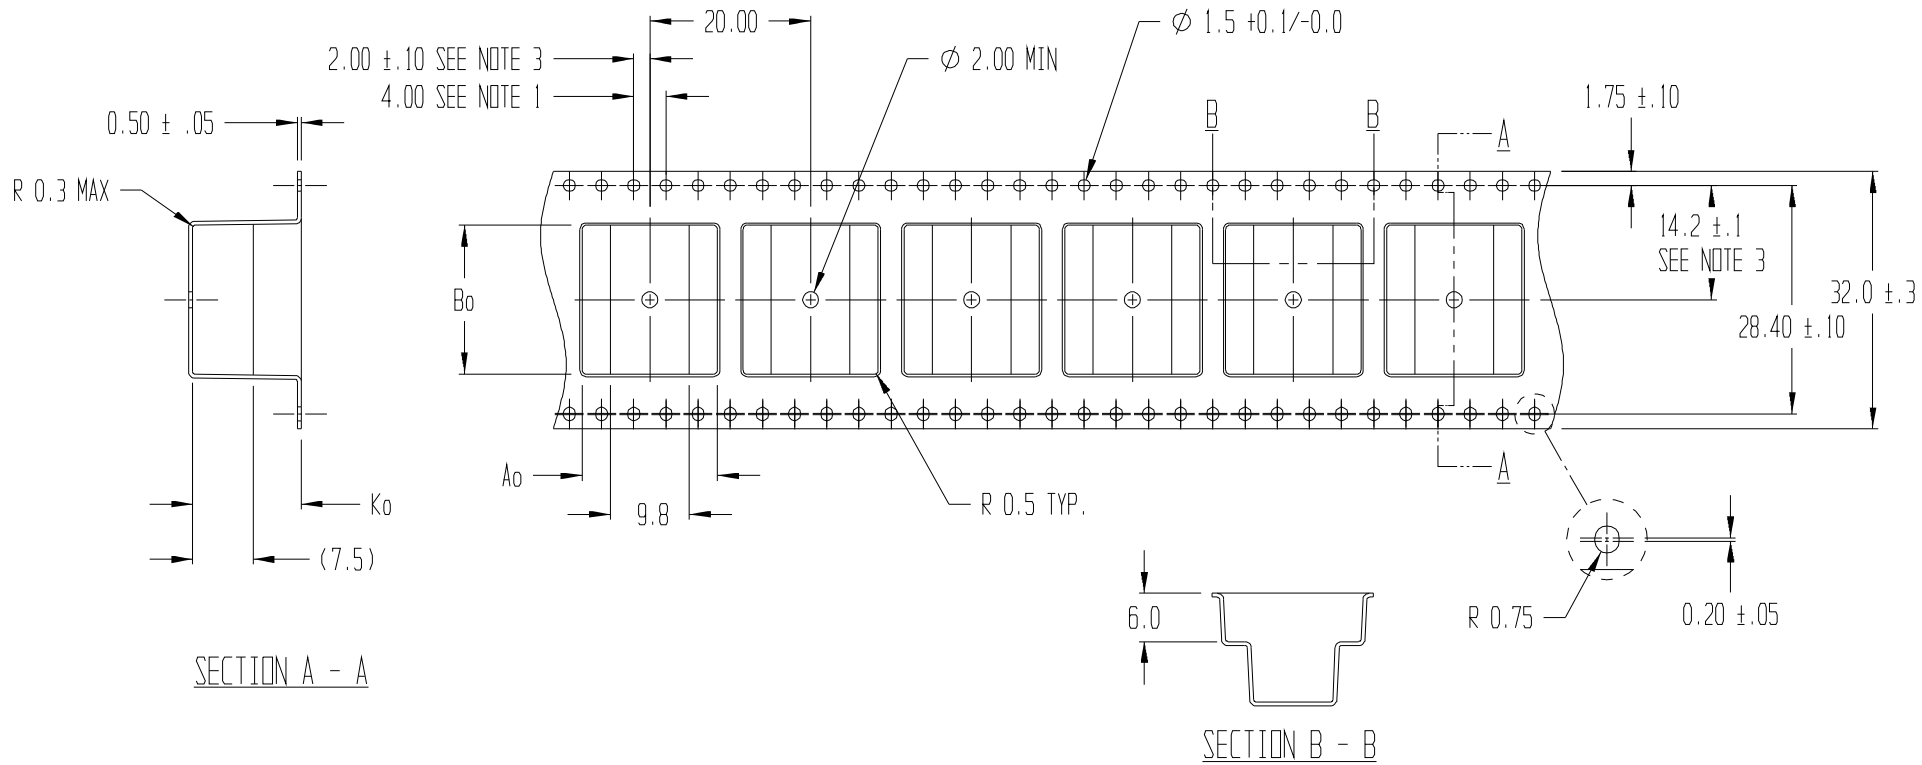

Ao = 16.8
Bo = 18.5
Ko = 13.5

NOTES:
1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ±0.2
2. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE
3. Ao AND Bo ARE CALCULATED ON A PLANE AT A DISTANCE "R" ABOVE THE BOTTOM OF THE POCKET.

ADVANTEK® engineered confidence™

TITLE	ADVANTEK PART DRAWING NUMBER 222001-A CARRIER TAPE		
TOLERANCES - UNLESS NOTED 1PL ±.2 2PL ±.10	MATERIAL PS+C		DWG SIZE B
	ALL DIMS IN MILLIMETERS PER ASME Y14.5M		
DRAWN BY JBH	DATE 02/14/2001	SCALE 3:2	SHEET 1 OF 1
CK'D BY	PROJECT NO. T-10836.01/ 7417.00	DWG NO. T103212BT	REV 1