


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
1	Aa & Ba were 24.8, eliminated A1 & B1	9/30/97	BTH
2	Drawing format change	11/26/02	BVB
3	Changed K1 to callout dimension	2/12/03	BTH

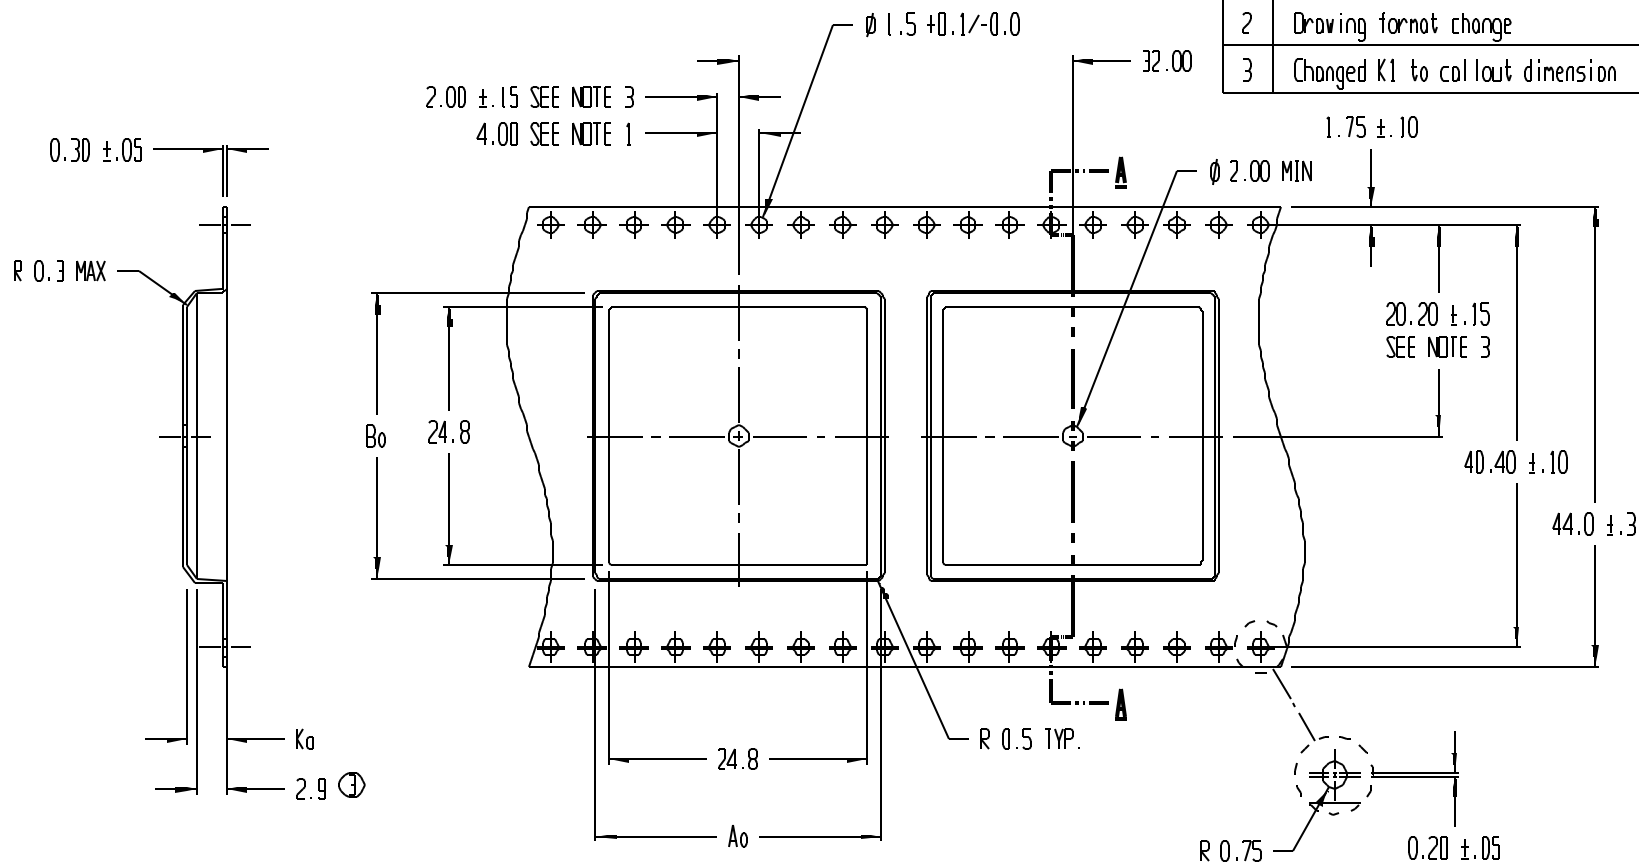

SECTION A - A

- ① A0 = 27.3
 ① B0 = 27.3
 K0 = 3.8

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ±0.2
2. CAMBER IN COMPLIANCE WITH EIA 481
3. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE

TITLE ADVANTEK PART DRAWING NUMBER BG2727-C CARRIER TAPE			
TOLERANCES - UNLESS NOTED 1PL ±.2 2PL ±.10		MATERIAL PS+C	
		ALL DIMENSIONS IN MILLIMETERS	DWG SIZE B
DRAWN BY BTH/SOC	DATE 8/6/97	SCALE 2:1	SHEET 1 OF 1
REFERENCE NO. T-6964		DWG NO. A0812-97-1	REV 3