


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
2	WAS CLOSED TOOL	3/21/11	BTH
3	RESTORED ORIGINAL WIDTH TOLERANCE	3/1/12	BTH

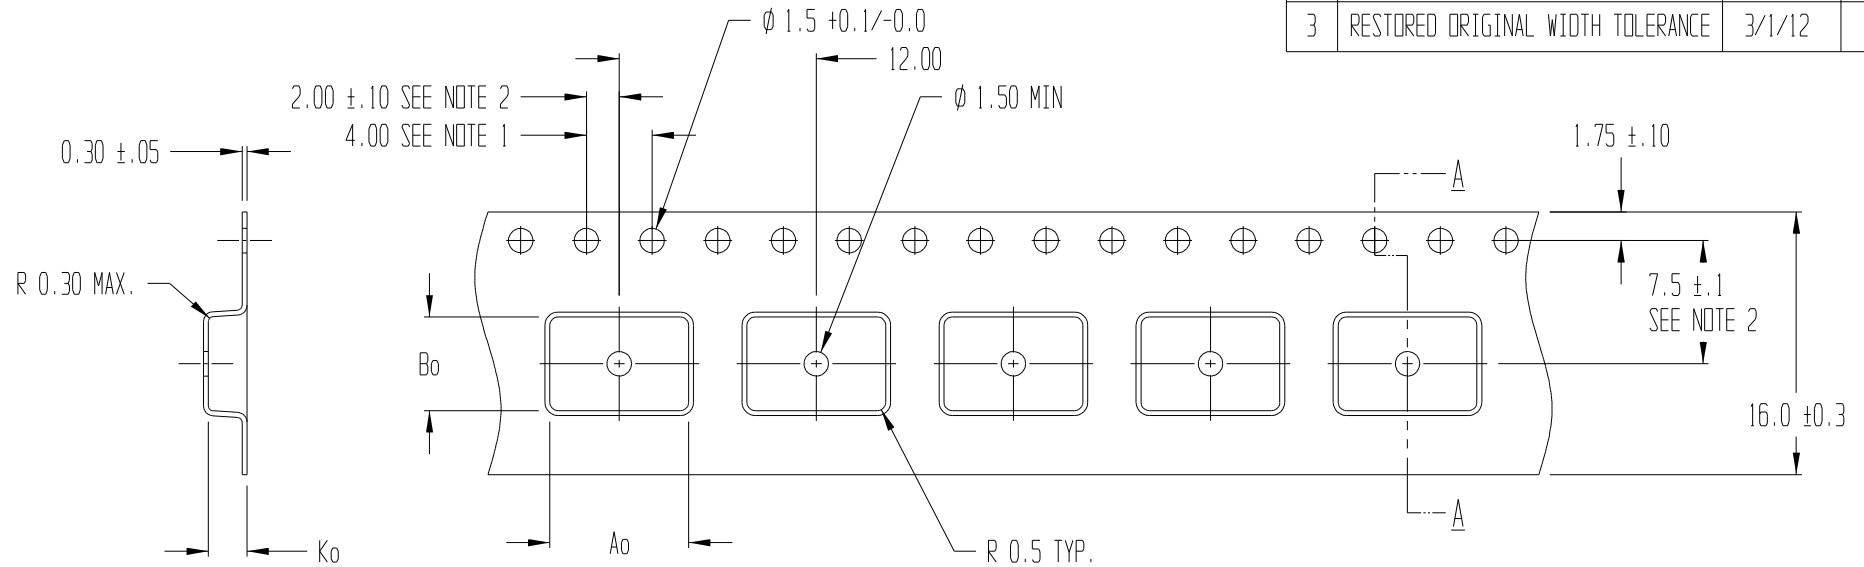

SECTION A - A

A₀ = 8.45
 B₀ = 5.70
 K₀ = 2.35

- NOTES:
1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ±0.2
 2. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE
 3. A₀ AND B₀ ARE CALCULATED ON A PLANE AT A DISTANCE "R" ABOVE THE BOTTOM OF THE POCKET.



TITLE ADVANTEK PART DRAWING NUMBER SOB-CAT-A CARRIER TAPE			
TOLERANCES - UNLESS NOTED 1PL ±.2 2PL ±.10	MATERIAL PS+C	DWG SIZE B	
ALL DIMS IN MILLIMETERS PER ASME Y14.5M			
DRAWN BY BJD	DATE 06/11/90	SCALE 3:1	SHEET 1 OF 1
CK'D BY	PROJECT NO. A0801-90-1/ 7417.00	DWG NO. A0801-90-1	REV 3