REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
1	WAS CLOSED TOOL	3/3/11	BTH

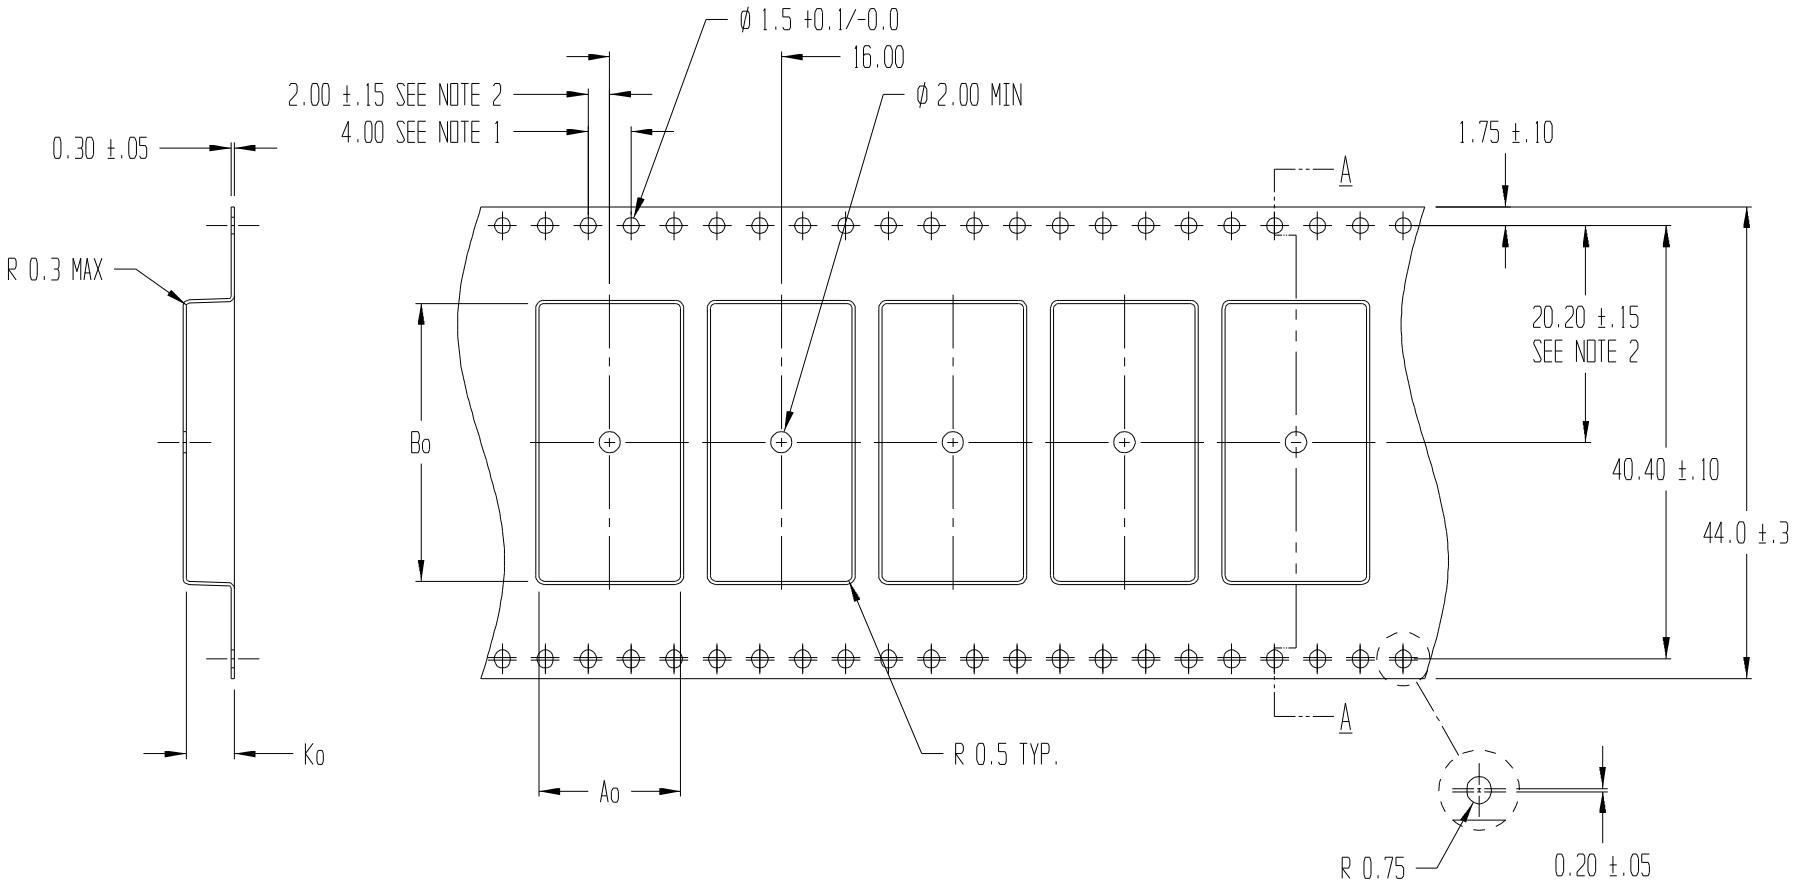

SECTION A - A

Ao = 13.2
Bo = 25.9
Ko = 4.5

NOTES:
1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ±0.2
2. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE
3. Ao AND Bo ARE CALCULATED ON A PLANE AT A DISTANCE "R" ABOVE THE BOTTOM OF THE POCKET.

ADVANTEK® engineered confidence™

TITLE	ADVANTEK PART DRAWING NUMBER ANA016-F CARRIER TAPE		
TOLERANCES - UNLESS NOTED 1PL ±.2 2PL ±.10	MATERIAL PS+C		DWG SIZE B
	ALL DIMS IN MILLIMETERS PER ASME Y14.5M		
DRAWN BY BTH	DATE 01/31/2003	SCALE 2:1	SHEET 1 OF 1
CK'D BY	PROJECT NO. T-12109/ 7417.00	DWG NO. T104019BT	REV 1