


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
2	WAS CLOSED TOOL	6/6/11	BTH
3	RESTORED ORIGINAL WIDTH TOLERANCE	10/8/12	BTH

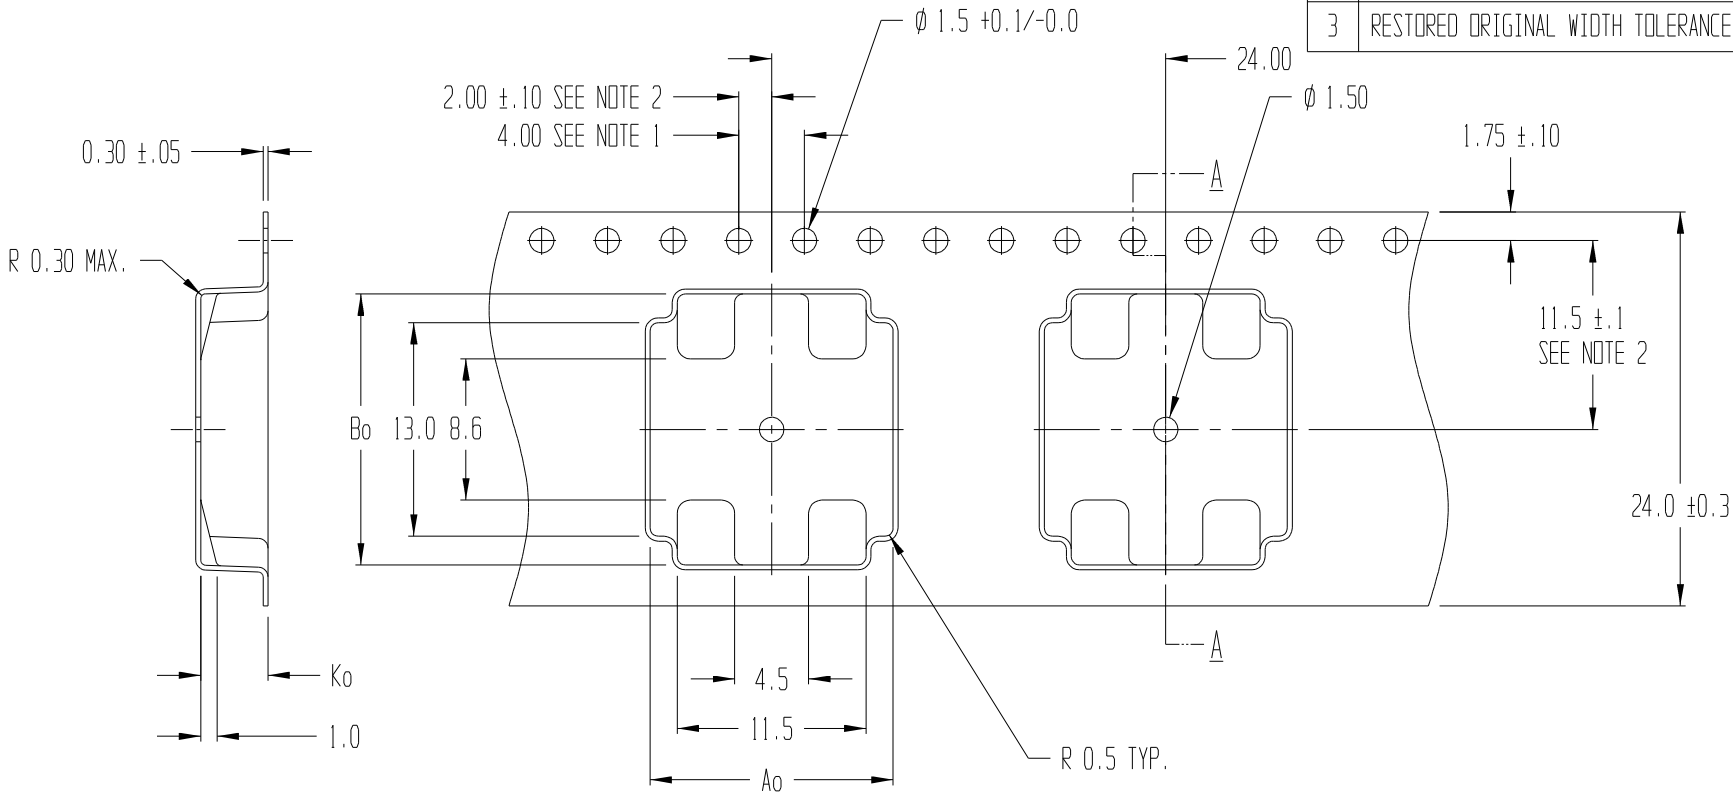

SECTION A - A

- NOTES:
1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.2
 2. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE
 3. A_0 AND B_0 ARE CALCULATED ON A PLANE AT A DISTANCE "R" ABOVE THE BOTTOM OF THE POCKET.

$A_0 = 14.80$
 $B_0 = 16.50$
 $K_0 = 4.10$



TITLE ADVANTEK PART DRAWING NUMBER HIPS16-A CARRIER TAPE			
TOLERANCES - UNLESS NOTED 1PL ± 0.2 2PL ± 0.10	MATERIAL PS+C	DWG SIZE B	
ALL DIMS IN MILLIMETERS PER ASME Y14.5M			
DRAWN BY T.S.	DATE 02/16/1993	SCALE 3:1	SHEET 1 OF 1
CK'D BY	PROJECT NO. 7417.00	DWG NO. A0415-93-1	REV 3