


| REVISIONS | | | |
|-----------|-----------------|---------|----------|
| REV | DESCRIPTION | DATE | APPROVED |
| 1 | WAS CLOSED TOOL | 4/11/11 | BTH |

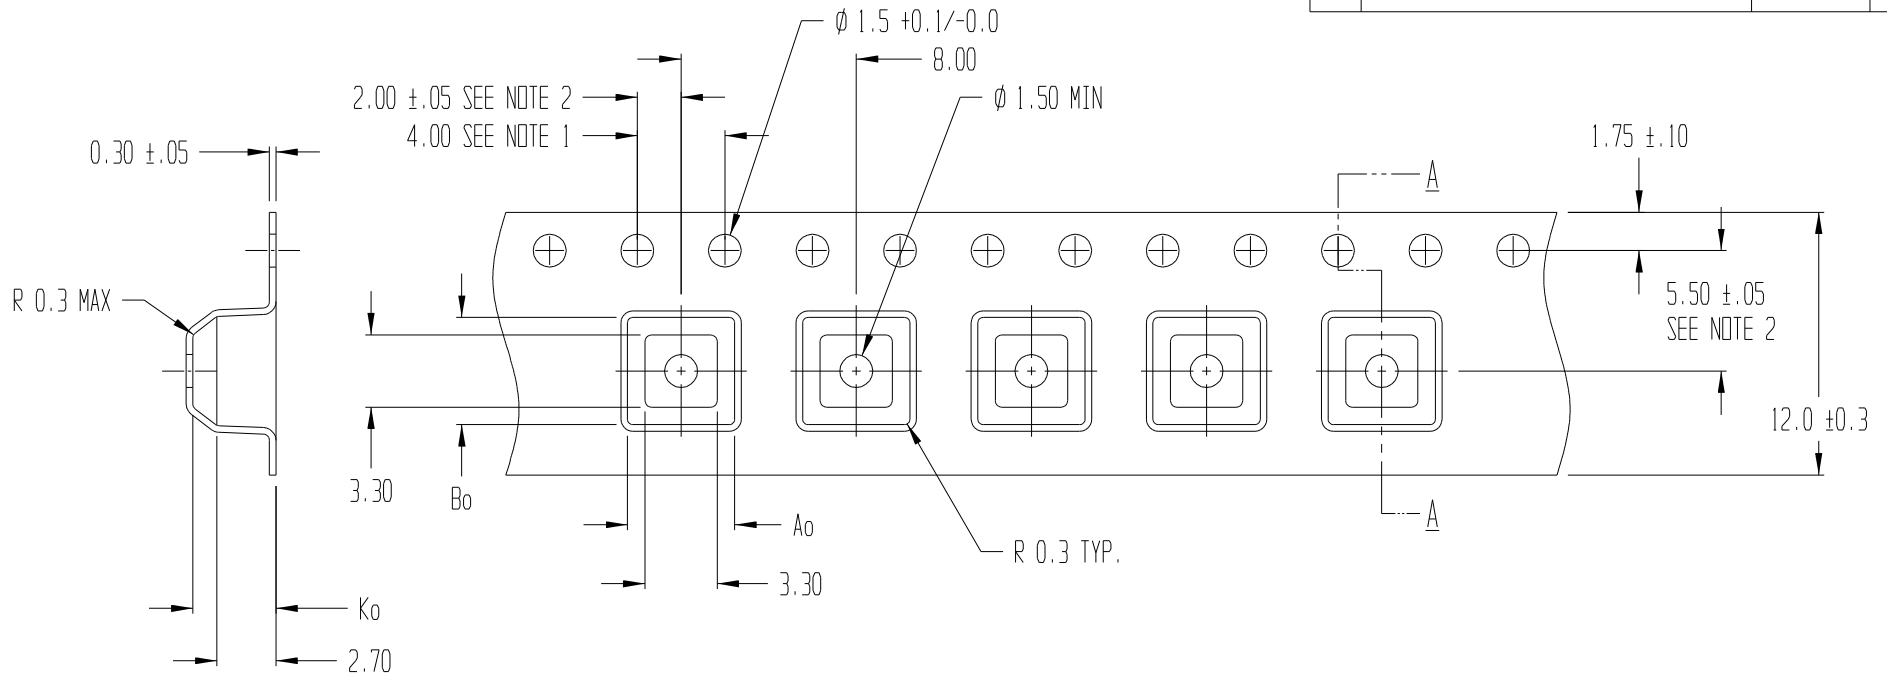

SECTION A - A

Ao = 4.90
Bo = 4.90
Ko = 3.80

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.2
2. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE
3. Ao AND Bo ARE CALCULATED ON A PLANE AT A DISTANCE "R" ABOVE THE BOTTOM OF THE POCKET.



ADVANTEK[®]
engineered confidence™

| | | | |
|---|------------------------------|-------------------|--------------|
| TITLE ADVANTEK PART DRAWING NUMBER TRANST-A CARRIER TAPE | | | |
| TOLERANCES - UNLESS NOTED 1PL ± 0.2 2PL ± 0.10 | MATERIAL PS+C | DWG SIZE B | |
| ALL DIMS IN MILLIMETERS PER ASME Y14.5M | | | |
| DRAWN BY BTH | DATE 02/20/2002 | SCALE 4:1 | SHEET 1 OF 1 |
| CK'D BY | PROJECT NO. T-11553/ 7417.00 | DWG NO. T103703BT | REV 1 |