


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
1	Was closed tool	6/24/94	T.S.
2	B1 was 17.0. Was -B	5/22/95	S.C.
3	K2 was 0.05	4/14/95	S.C.
4	Drawing format change	4/29/06	SFP

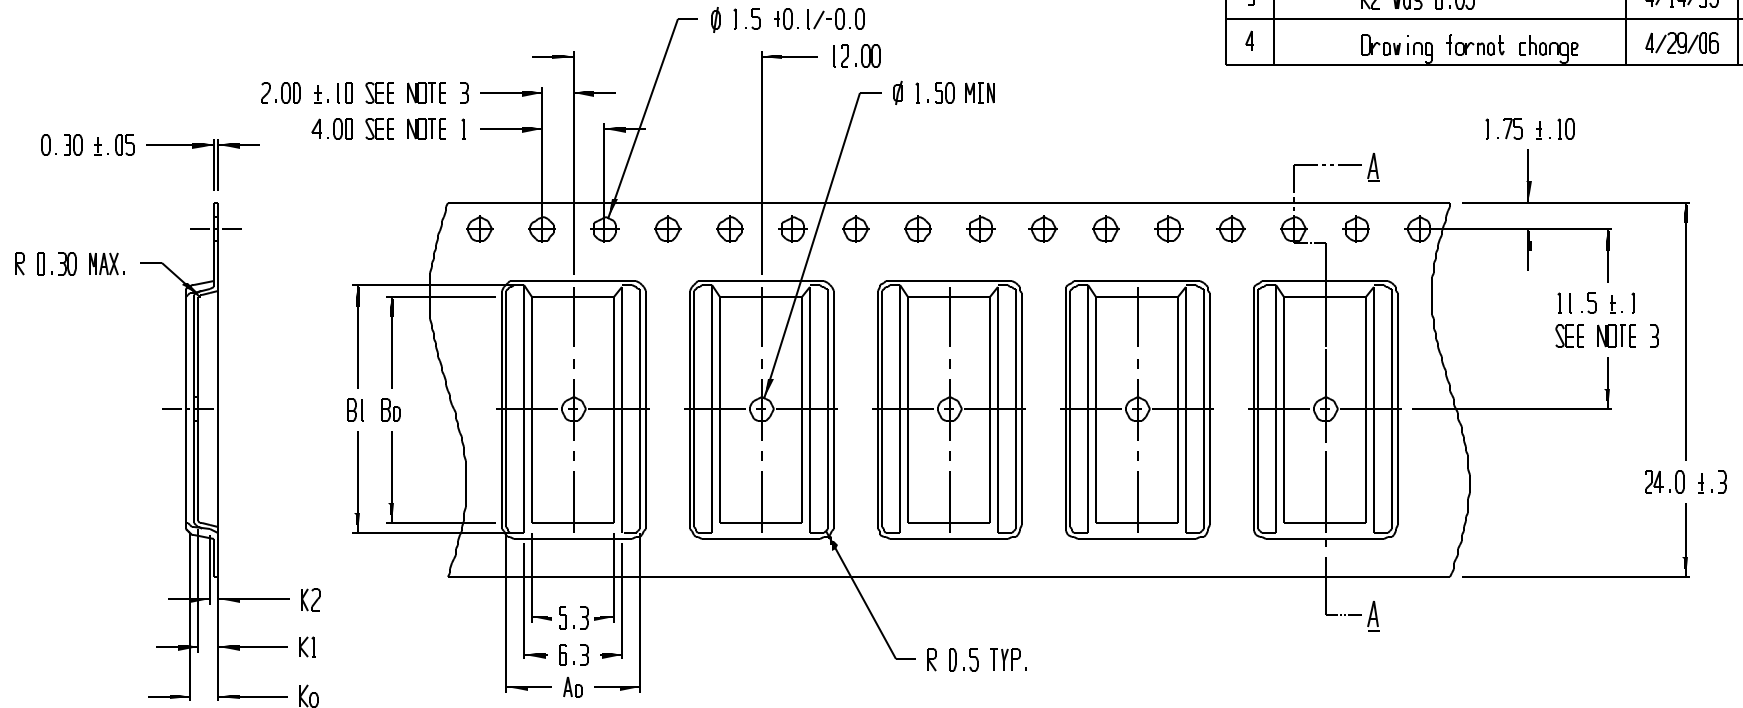

SECTION A - A

$A0 = 8.60$
 $B0 = 14.50$
 $B1 = 15.80$
 $K0 = 1.80$
 $K1 = 1.30$
 $K2 = 0.50$

NOTES:

1. 10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE ± 0.2
2. CAMBER IN COMPLIANCE WITH EIA 481
3. POCKET POSITION RELATIVE TO SPROCKET HOLE MEASURED AS TRUE POSITION OF POCKET, NOT POCKET HOLE

ADVANTEK

TITLE ADVANTEK PART DRAWING NUMBER TSS056-C
CARRIER TAPE

TOLERANCES - UNLESS NOTED 1PL ± 0.2 2PL ± 0.10		MATERIAL PS+C	
DRAWN BY RJ8		DATE 05/02/1994	SCALE 3:1
REFERENCE NO.		DWG NO. A0517-94-1	REV 4