







THIS IS A C.A.D. GENERATED DRAWING
DO NOT MAKE MANUAL REVISIONS TO WORKSHOP.



*UNLESS SPECIFIED
TOLERANCES UNDECLARED IS: $\pm 0.20\text{MM}$

Change Record

Date Of Initial Confirmation

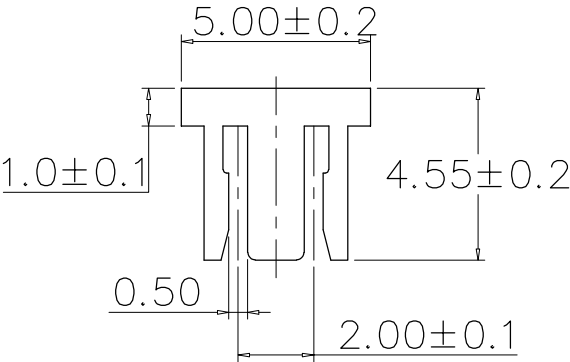


General Tolerances			
SELECT	✓		
TOL NO.	1	2	3
.XXX	± 0.10	± 0.15	± 0.20
.XX	± 0.15	± 0.20	± 0.25
.X	± 0.20	± 0.25	± 0.30
X.	± 0.25	± 0.30	± 0.50
ANGLE	$\pm 3^\circ$		

Technical Notes:

- (1) The material is NL6T UL94V-0
- (2) Products meet RoHS environmental requirements.
- (3) Insulation Resistance: $>1000\text{M}\Omega$ Min
- (4) Operating Temperature: $-40^\circ\text{C} \sim +105^\circ\text{C}$
- (5) Retention Force of $\geq 0.1\text{Kg}$
- (6) Resistance to Soldering and Hot Joints ($260^\circ\text{C} \pm 5^\circ\text{C}/10$ seconds): the plastic core without blistering, melting, deformation and other phenomena;



NEWWAYSMART SMT CONSUMABLES
Limitless Innovation & Maximize SMT Efficiency

Part Name				Design	Check	Approval		
PICKUP-HEADCAP				<div><div>NWSMTC</div><div>2022-8-30</div><div>ZDM</div></div>	<div><div>NWSMTC</div><div>2022-8-30</div><div>BRL</div></div>	<div><div>NWSMTC</div><div>2024-3-11</div><div>Duncan</div></div>		
Part Number								
NWSAT2F401-5.6X5X4.55X2.0PH2								
Material	NL6T	Property	STD	<div>Third Perspective</div> <div></div>	Drawing Style		HEADER-CAP	
QTY	—	Scale	1:1		Version	A0	Chat No.	1
Unit	MM	Layout	A4H					