



THIS IS A C.A.D. GENERATED DRAWING  
DO NOT MAKE MANUAL REVISIONS TO WORKSHOP.



\*UNLESS SPECIFIED  
TOLERANCES UNDECLARED IS:  $\pm 0.20\text{MM}$




Change Record

Date Of Initial Confirmation



General Tolerances

SELECT	✓		
TOL NO.	1	2	3
.XXX	$\pm 0.10$	$\pm 0.15$	$\pm 0.20$
.XX	$\pm 0.15$	$\pm 0.20$	$\pm 0.25$
.X	$\pm 0.20$	$\pm 0.25$	$\pm 0.30$
X.	$\pm 0.25$	$\pm 0.30$	$\pm 0.50$
ANGLE	$\pm 3^\circ$		

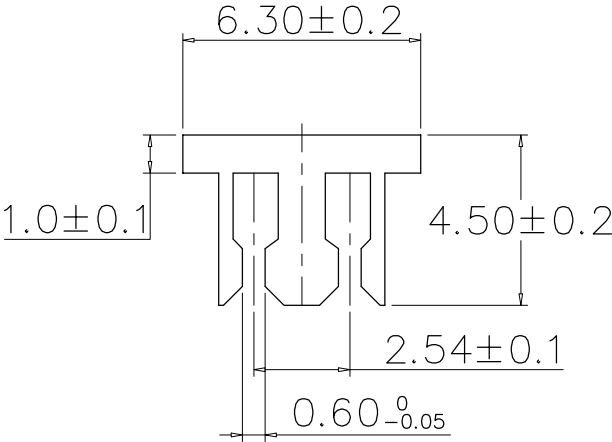


Technical Notes:

- (1) The material is NL6T UL94V-0
- (2) Products meet RoHS environmental requirements.
- (3) Insulation Resistance:  $>1000\text{M}\Omega$  Min
- (4) Operating Temperature:  $-40^\circ\text{C} \sim +105^\circ\text{C}$
- (5) Retention Force of  $\geq 0.1\text{Kg}$
- (6) Resistance to Soldering and Hot Joints ( $260^\circ\text{C} \pm 5^\circ\text{C}/10$  seconds): the plastic core without blistering, melting, deformation and other phenomena;



NEWWAYSMART SMT CONSUMABLES  
Limitless Innovation & Maximize SMT Efficiency

Part Name				Design	Check	Approval		
PICKUP-HEADCAP				<div><div>NWSMTC</div><div>2022-8-30</div><div>ZDM</div></div>	<div><div>NWSMTC</div><div>2022-8-30</div><div>BRL</div></div>	<div><div>NWSMTC</div><div>2024-3-26</div><div>Duncan</div></div>		
Part Number								
NWSGH0297-7X6.3X4.5X2.54PH2								
Material	NL6T	Property	STD	<div>Third Perspective</div> <div></div>	Drawing Style		HEADER-CAP	
QTY	—	Scale	1:1		<div>Version</div> <div>A0</div>	<div>Chat No.</div> <div>1</div>		
Unit	MM	Layout	A4H					